
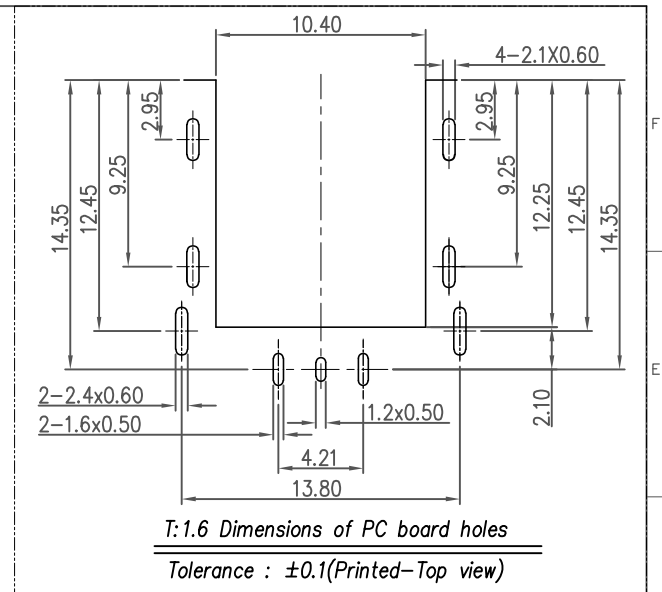
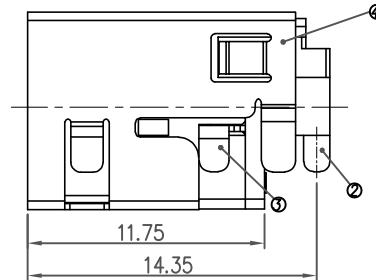
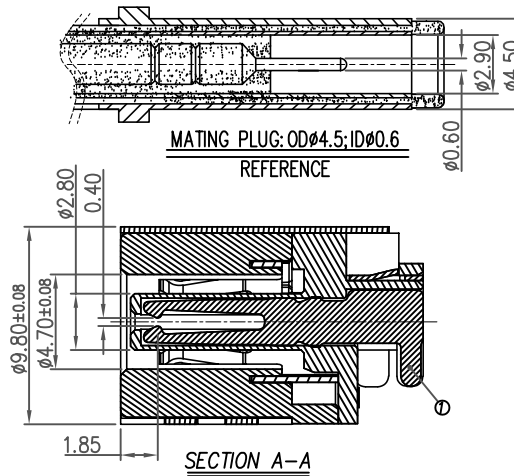
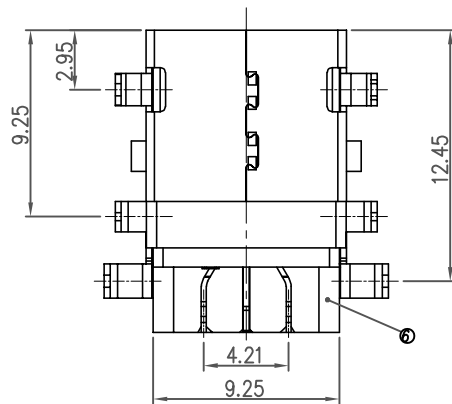
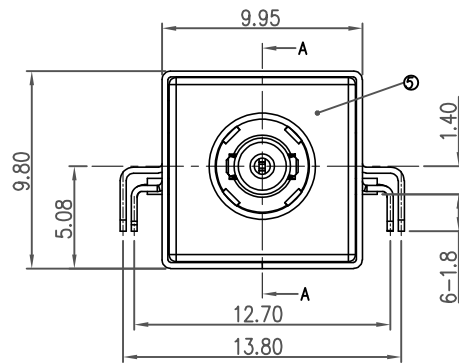


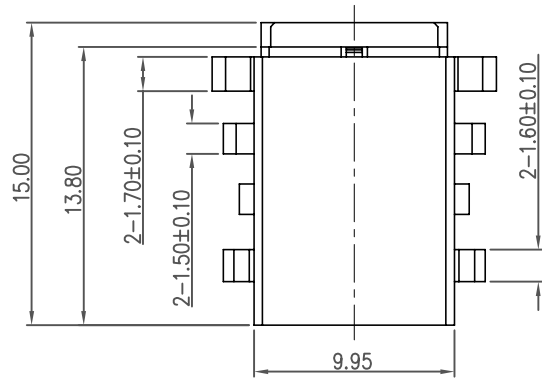

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 20V, 1A Min.

1-2. CONTACT RESISTANCE:

50 MILLIOHMS Max. FOR INITIAL,
80 MILLIOHMS Max. AFTER 5000 CYCLES.

1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.
BY 500V DC AFTER 1 MINUTE.

1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V
RMS AFTER 1 MINUTE.

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)

3. LIFE TEST: 5,000 CYCLES.

⑥ COVER	1	PA10T	Black
⑤ HOUSING	1	PA10T	Black
④ SHELL	1	C2680R-H T=0.30	Ni 50U"Min
③ TERMINAL 3#	1	C5210R-EH T=0.30	触点Au0.05", 焊脚Sn60Pb40", H1.5±0.05"
② TERMINAL 2#	1	C5210R-EH T=0.25	触点Au0.05", 焊脚Sn60Pb40", H1.5±0.05"
① TERMINAL 1#	1	C5210R-EH T=0.30	触点Au0.05", 焊脚Sn60Pb40", H1.5±0.05"
CIRCUIT DIAGRAM	No.	PART NAME QTY	MATERIAL(THICK) PLATING(COLOR)



UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—


3RD ANGLE PROJECTION

DESIGN:	GAO. PENG	PART NAME:
CHECK:	2021.9.16	Φ4.5 X Φ0.6
APPROVED	HE. LONG. FEI	DC POWER JACK
	2021.9.16	PART NO.
		XB-DC-450060-0912-20000H
		SHEET: 1/1 REV.: A1
		DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

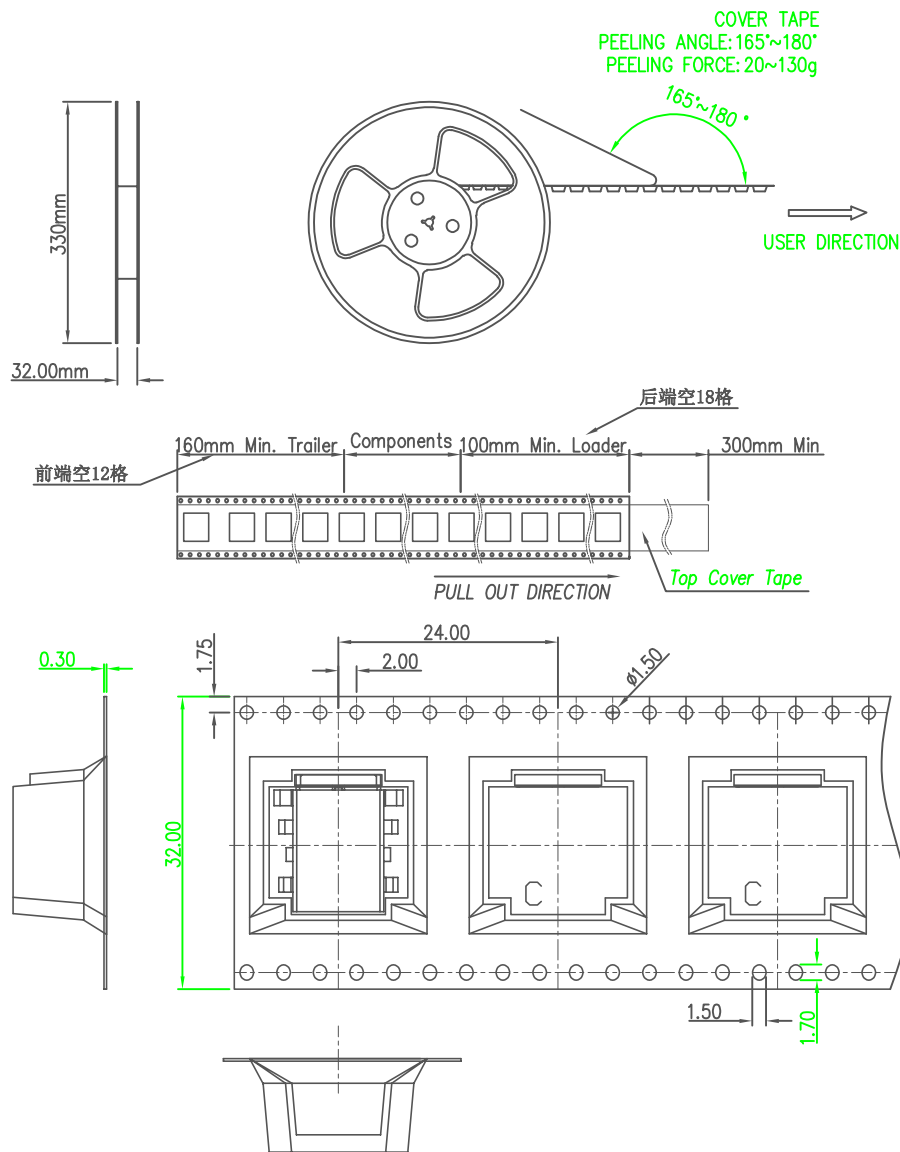


250PCS/盘

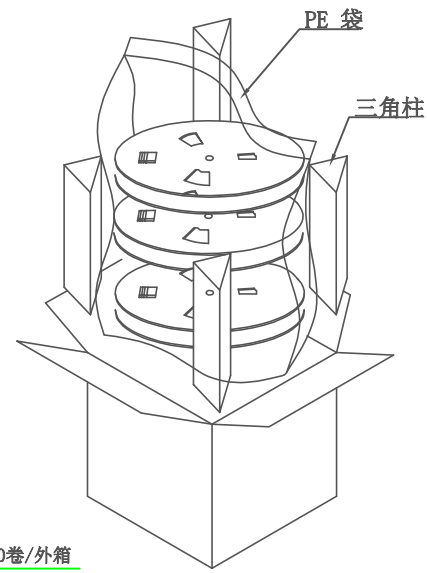

PE 袋

三角柱

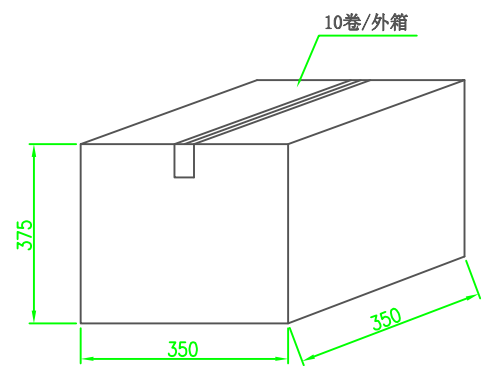

10卷/外箱

2500PCS/10盘/箱

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
7				

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2021.9.16	PART NAME: Φ4.5 X Φ0.6 DC POWER JACK-包装图	
DIM	TOL	DIM	TOL	CHECK:		PART NO. XB-DC-450060-0912-20000H	
X.	±0.50	X.	±2°			SHEET: 1/1 REV.: A1	
X.X	±0.30	X.X	±1°			DRAWING NO	
X.XX	±0.20	X.XX	—				
X.XXX	±0.10	X.XXX	—	APPROVED	HE. LONG. FEI 2021.9.16		
3RD ANGLE PROJECTION				UNIT: mm			
4				3	2	1	

8

7

6

5

4

3

2

1