

ROHS

REV.

ECN. #

DESCRIPTION

NAME



DATE

A0






NEW RELEASE

X. F. Wang

2023. 02. 24



3D VIEW

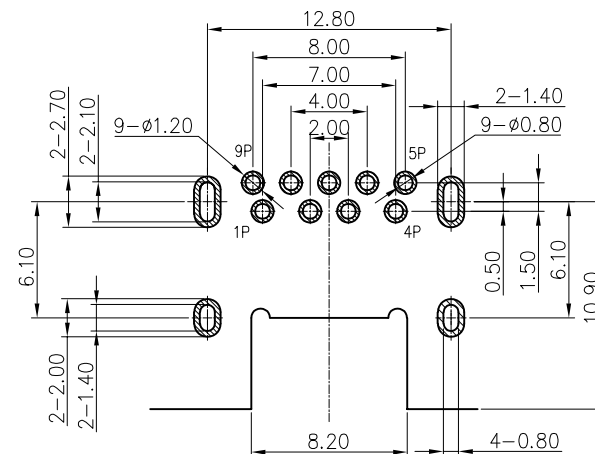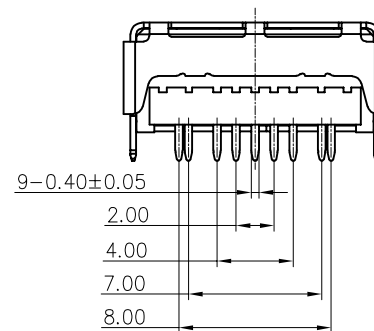DETAIL A
2:1RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE: ±0.05

PAD AREA

NOTES:

1. MATERIAL:

- 1.1 Housing: High Temperature Thermoplastic UL94V-0; Color BLUE.
1.2 Terminal: Copper Alloy, T=0.25mm,
Contact Au: 1u"Min plating ; solder MATTE TIN 100~160u", Ni: 50u"Min
1.3 Shell: Stainless Steel, T=0.30mm, plating Ni: 30u"Min

2. SPECIALITY:

- 2.1 Rated current: 1A
2.2 Rated voltage: 30V
2.3 Contact Resistance: 30mΩ MAX
2.4 Insulation Resistance: 100MΩ MIN 500V DC
2.5 Dielectric withstanding voltage: 100V AC.
2.6 Durability: 5000 Cycles Min.
2.7 INSERTION FORCE: 35N Max
2.8 EXTRACTION FORCE: 10N Min INITIAL, 8N Min AFTER TEST
2.9 Operating condition: Temperature -40℃~+75℃;
Humidity 80% R.H MAX


9	STDA_SSTX-	USB3.0
8	STDA_SSTX-	
7	GND	
6	STDA_SSRX-	USB2.0
5	STDA_SSRX-	
4	GND	
3	D+	
2	D-	
1	VBUS	
PIN NO	SIGNAL NAME	REMARK

MILLIMETERS	INCH	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X. ° ±2°	X. ° ±2°						
.X ±0.30	.X ±0.012	TITLE	USB 3.0 TOP DIP L=13.9	DR			
.XX ±0.20	.XX ±0.008	PART NO.	XB-UB002-11	CHKD			
.XXX ±0.10	.XXX ±0.004	PRO J.	PAGE 1/2	UNITS mm	APPD		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd.			SIZE A4	SCALE 1:1	DIS NO.	XB-UB002-11客户图	


ROHS

NOTES:

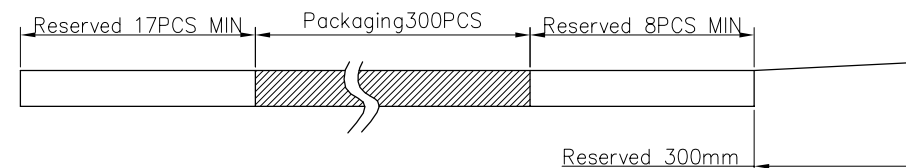- 1、Packing quantity per plate: 300PCS/Plate
- 2、Loading and packing method



3、Total packaging: 2700PCS/Box

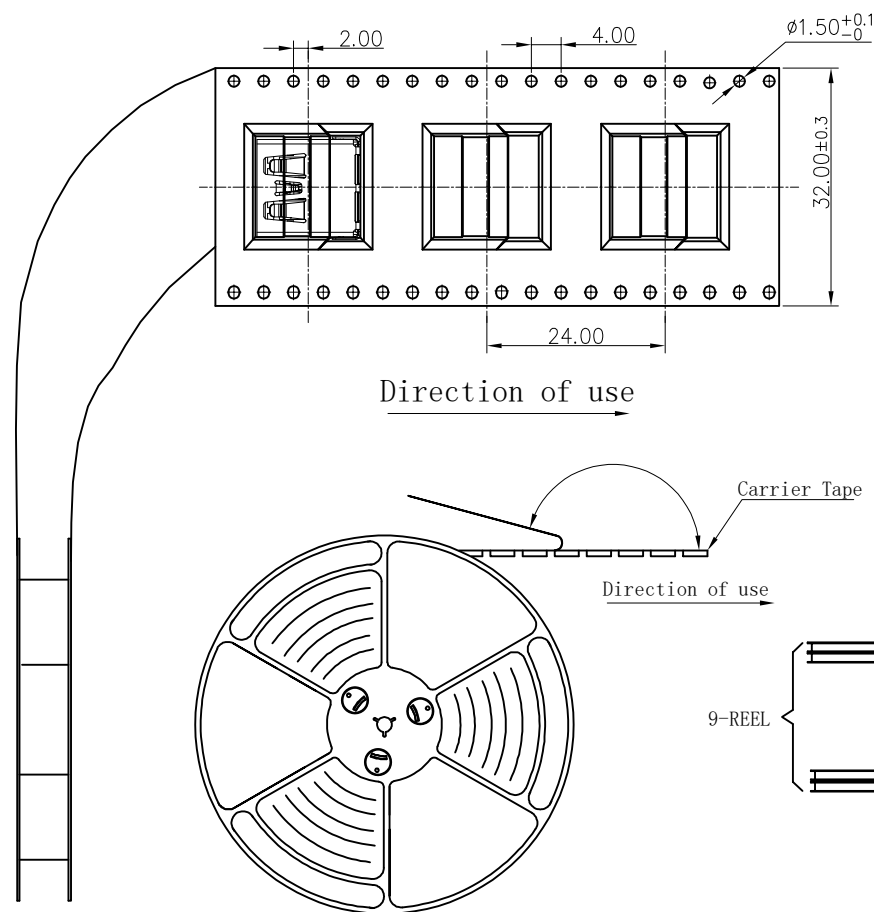

The bottom and top of the carton
Pad it with a piece of pearl wool

packaging tape
label

BOX
350*350*340mm

Part Number	Description	Quantity
303020111	Carrierband (Lucent,PET W=32 PH=24,T=0.4)	70.2M
303040009	Box (K=K,T=7.0,350*350*340)	1PCS
303060001	PE Bag (T=0.08mm, 730*760*730)	1PCS
303070028	Self-adhesive (W=25.50)	72.9M
303110001	Beam (K=K, T=7.0,95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180021	REEL (BLUE, 13Inches*32mm, Ø330)	9PCS
104018992	USB 3.0 TOP DIP L=13.9	2700PCS

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd.	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE	USB 3.0 TOP DIP L=13.9	DR	He. Long. Fei
PART NUM.	XB-UB002-11	CHKD	Long. Liu. Ting
PRO J.	PAGE 2/2	UNITS mm	APPD Lai. Hai. Jie
SIZE	A4	SCALE 1:1	DIS NO. XB-UB002-11客户图