

A

B

C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2017.03.23






1

2

3

4

5

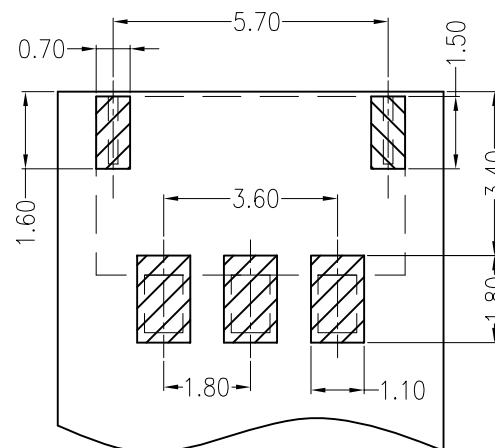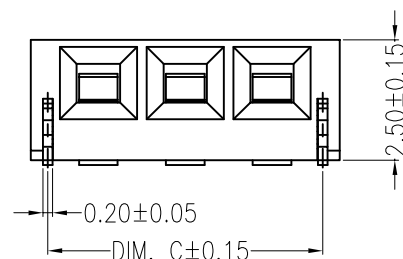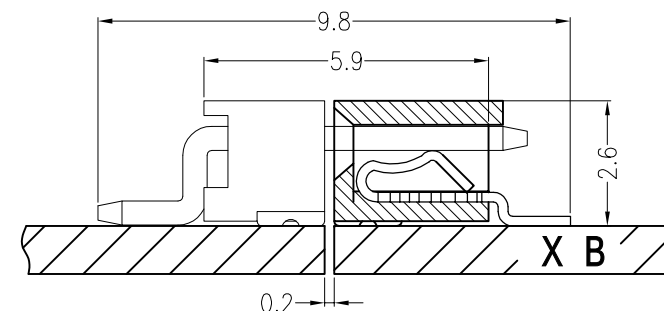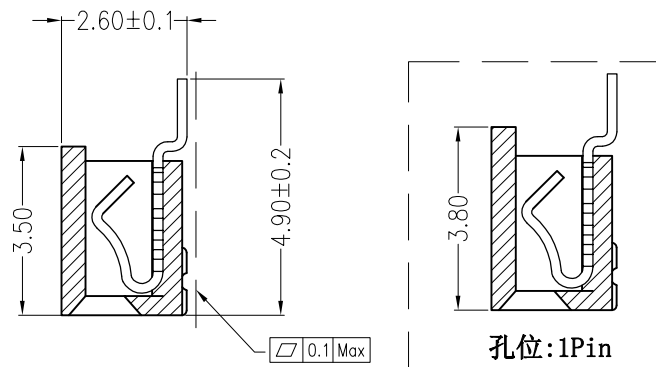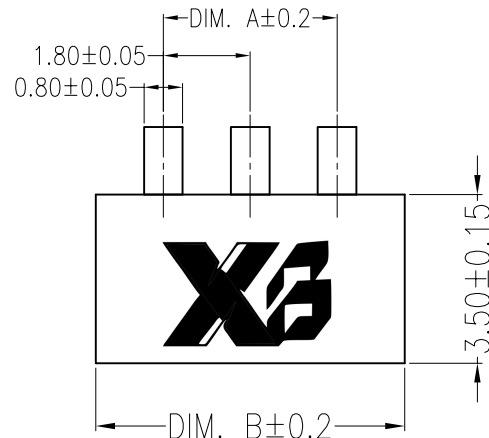

Mating Aluminum plate detail


Assembly Layout


主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐电压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

XB-L010Y-**-F2MB-*			
PART No.			
No. FOR CIRCUITS:			
01~04			
PLASTIC MATERIAL:			
F2M=LCP (BEIGE)			
PACKAGING:			
R=REEL			
P=PE			
PLATING:			
B=MATTE Sn			

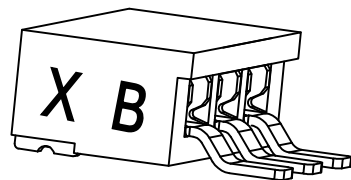

名 称	DIM=A	DIM=B	DIM=C	备 注	C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated	
					B	CONTACT	1~4 PCS	PhosphorBronze	MATTE Sn-plated	
					A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE	
L010Y-01		B=2.80	C=2.10		ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
L010Y-02	A=1.80	B=4.60	C=3.90		XB 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD					TITLE: -
L010Y-03	A=3.60	B=6.40	C=5.70							1.8mmPITCH 90°WAFER SMT TYPE
L010Y-04	A=5.40	B=8.20	C=7.50		X.±0.5	X.±5°	USE:	PART NO.:		
L010Y-03(2)	A=3.60	B=6.40	C=5.70	中间空一针	.X±0.3	.X±2°	CUSTOMER	L010Y-**-F2MB-*		
					.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:		
L010Y-04(2)	A=5.40	B=8.20	C=7.50	中间空二针	--	--	CHKD: 田峰	GCCP-0020		
L010Y-04(3)	A=5.40	B=8.20	C=7.50	右边起空第二针		UNITS: mm	DR: 吴丹平	SCALE 1 : 1	SHEET 1 / 1	