
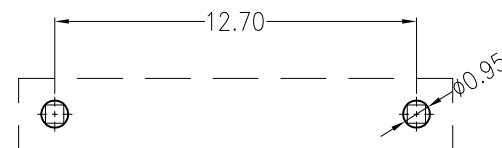
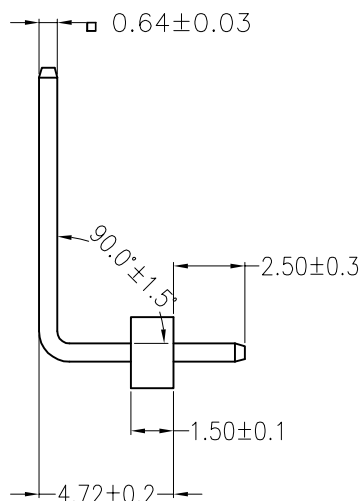


定制品

起订量

50000PCS

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.09.20

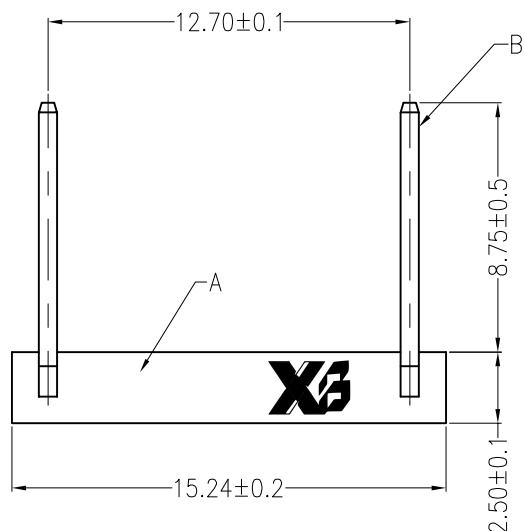



Board Layout
General Tolerance: ± 0.05

主要技术参数 Main Specifications

线 数 (Poles): 02 to 10
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 2.0A AC DC
耐 电 压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

L012-12.7-B1MB2-P-50			
PART No.		SPECIAL CODE:	
No. FOR CIRCUITS:		50=弯针8.75*2.5*4.72	
12.7		PACKAGING:	
PLASTIC MATERIAL:		P=PP	
B1M=PA46 (BEIGE)		Metal code:	
		2=Brass	
		PLATING:	
		B=MATTE Sn	

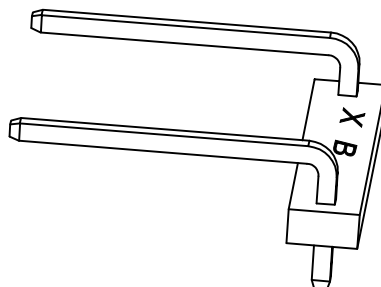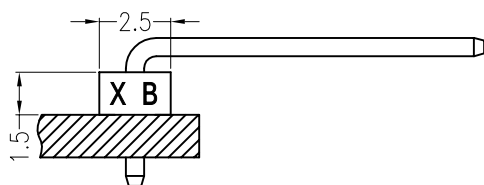

Assembly Layout

C				
B	CONTACT	2 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
X.±0.5	X.±5°	USE:	CUSTOMER	
.X±0.3	.X±2°	APPD:	谭龙清	
.XX±0.25	.XX±1°	CHKD:	田峰	
--	--	DR:	蒋建银	
⊕	⚡	UNITS: mm		
TITLE: -			12.7mmPITCH 90°WAFER DIT TYPE	
PART NO.:			L012-12.7-B1MB2-P-50	
DWG NO.:			GCCP-1128	
SCALE		SHEET		
1 : 1		1 / 1		