
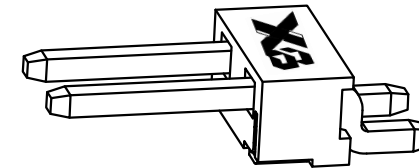
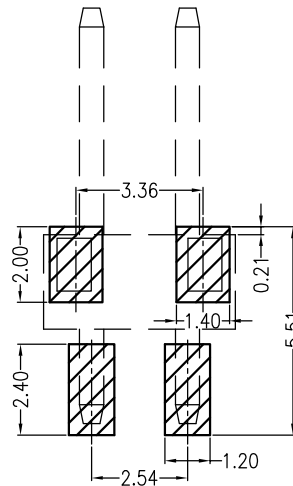


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	李润	2016.07.01





主要技术参数 Main Specifications

线 数 (Poles): 02 to 04
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 125V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1000V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

XB-L015AWR-02-F2MA2-R			
PART No.		PACKAGING:	
No. FOR CIRCUITS:		P=PE	
02		R=REEL	
PLASTIC MATERIAL:		Metal material:	
F2M=LCP (BEIGE)		2=Brass	
		PLATING:	
		A=Sn	

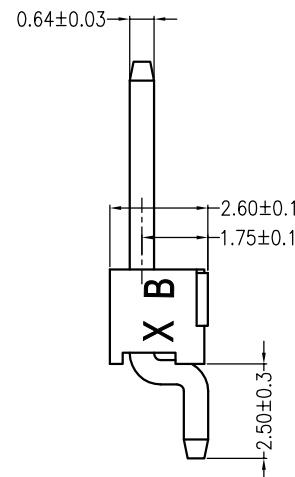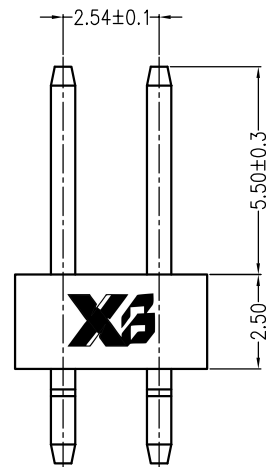

C	Solder Tab	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	2 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: L015AWR-02-01* 2.54mmPITCH 90°WAFER SMT TYPE		
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:
.X±0.3	.X±2'	APPD:		L015AWR-02-F2MA2-R
.XX±0.25	.XX±1'	CHKD:		DWG NO.:
--	--	DR: 蒋建银		GCCP-0251
	UNITS: mm	SCALE 1 : 1		SHEET 1 / 1