
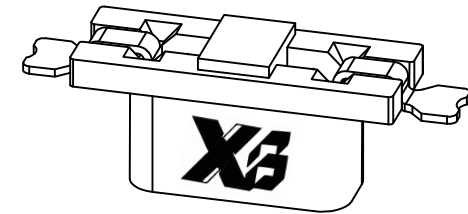
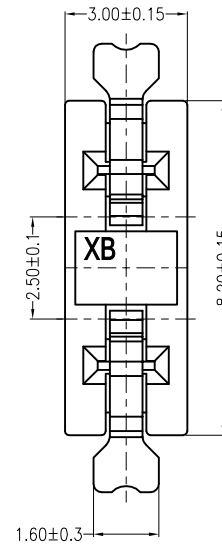
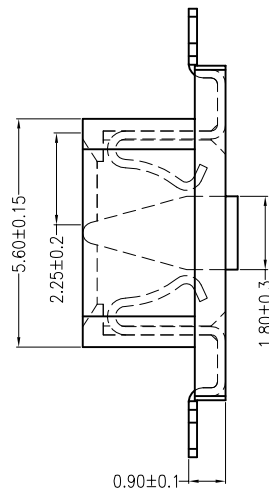


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30



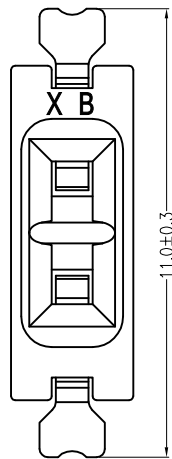


主要技术参数 Main Specifications

线 数 (Poles): 02
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$

ORDER INFORMATION:

XB-L048-02-F2MB-*			
PART No.		PACKAGING:	
No. FOR CIRCUITS:		P=PE	
02		R=REEL	
PLASTIC MATERIAL:		PLATING:	
F2M=LCP (BEIGE)		B=MATTE Sn	

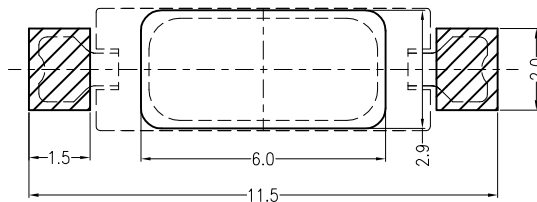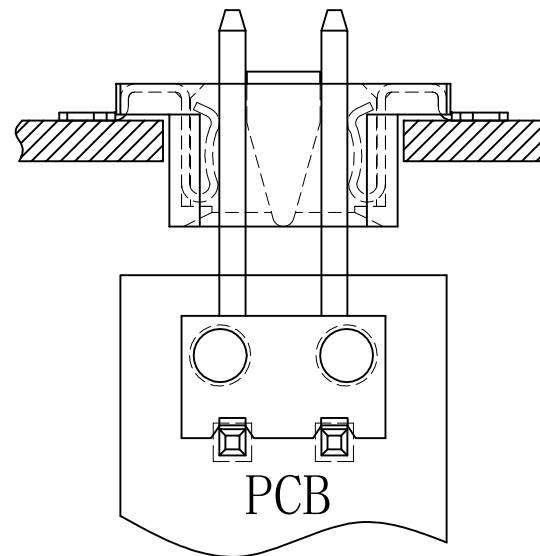

Board Layout

Assembly Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
TITLE: -				2.5mmPITCH 180°WAFER SMT TYPE
PART NO.:				L048-02-F2MB-*
DWG NO.:				GCCP-0160
SCALE				SHEET
1 : 1				1 / 1