

A

B





C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

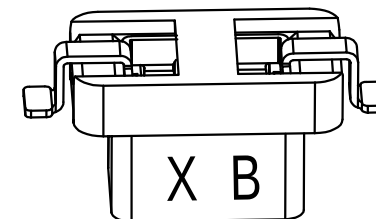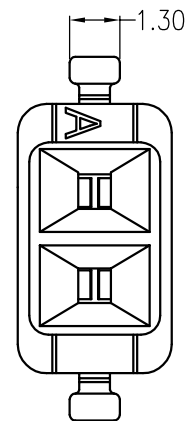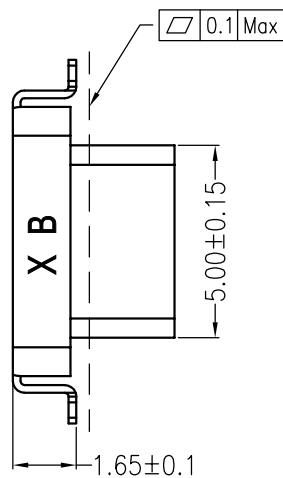
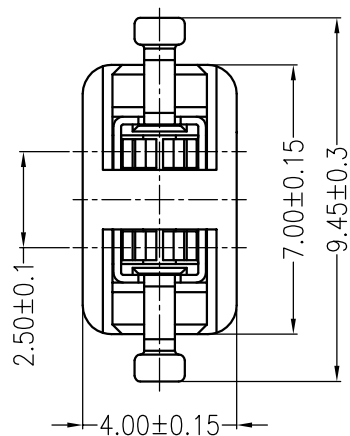


主要技术参数 Main Specifications


线 数 (Poles): 02
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
额定电压 (Rated voltage): 275V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$

ORDER INFORMATION:

XB L055AFV-02-F2MB1-R-5			
PART No.			SPECIAL CODE
No. FOR CIRCUITS:			5=方孔插针
02			PACKAGING:
PLASTIC MATERIAL:			R=REEL
F2M=LCP (BEIGE)			P=PE
	PLATING:		Metal code:
	B=MATTE Sn		1=Phosphor bronze

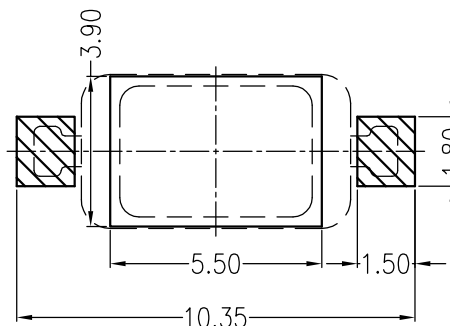

Board Layout
General Tolerance: ± 0.05

C						
B	CONTACT		2 PCS	PhosphorBronze	MATTE Sn-plated	
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE	
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH	
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD						TITLE: - 2.5mmPITCH 180°WAFER SMT TYPE
X.±0.5		X.±5"	USE:		PART NO.: L055AFV-02-F2MB1-R-5	
			CUSTOMER			
.X±0.3		.X±2"	APPD: 邵敬和		DWG NO.:	
.XX±0.25		.XX±1"	CHKD: 曾令青			
--		--				
		UNITS: mm	DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1