

A	B	C
Customized products	MOQ	50000PCS

E	F
REV	DESCRIPTION
X0	NEW RELEASE
DESIGN	DATE
蒋建银	2019/08/16





1

2

3


4

5

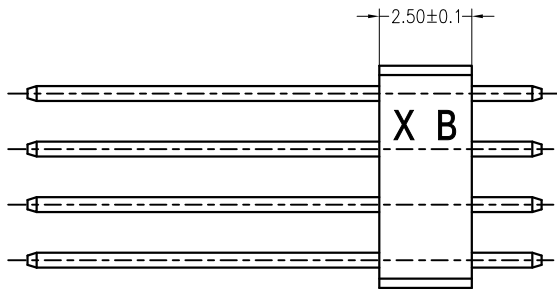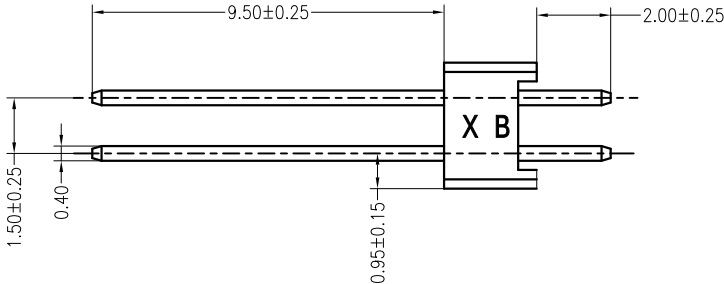

PIN.	DIM A	DIM B
2*2	1.50	3.00
2*3	3.00	4.50
2*4	4.50	6.00
2*5	6.00	7.50
2*6	7.50	9.00
2*7	9.00	10.50
2*8	10.50	12.00

PCB LAYOUT



Specifications:

Poles: 04 to 16
 Contact resistance:≤30mΩ
 Insulation resistance:≥500MΩ
 Rated voltage:250V AC DC
 Rated current:1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range:−40℃~ +110℃
 Housing:LCP UL94V-0,Natural(Beige)
 Contacts:Brass/MATTE Sn-plated

ORDER INFORMATION:

XB- L1501A-2**-F6MB2-P-8	
PART No.	SPECIAL CODE:
	8=Straight needle 9.5*2.0
	PACKAGING:
	P=PE
No.OF CIRCUITS:	Metal code:
2**	2=Brass
PLASTIC MATERIAL:	PLATING:
F6M=LCP(BEIGE)	B=MATTE Sn

东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: 1.5mmPitch 180°wafer dip type	
GENERAL TOLERANCE X. ±0.50 X. ±5° X.X ±0.30 X.X ±2° X.XX ±0.20 X.XX ±1°		USE: CUSTOMER APPD: 刘振岭 CHKD: 王亮	
UNITS: mm		PART NO.: L1501A-2**-F6MB2-P-8 DWG NO.:	
DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1