



REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0	—	Release	—	2018.06.11

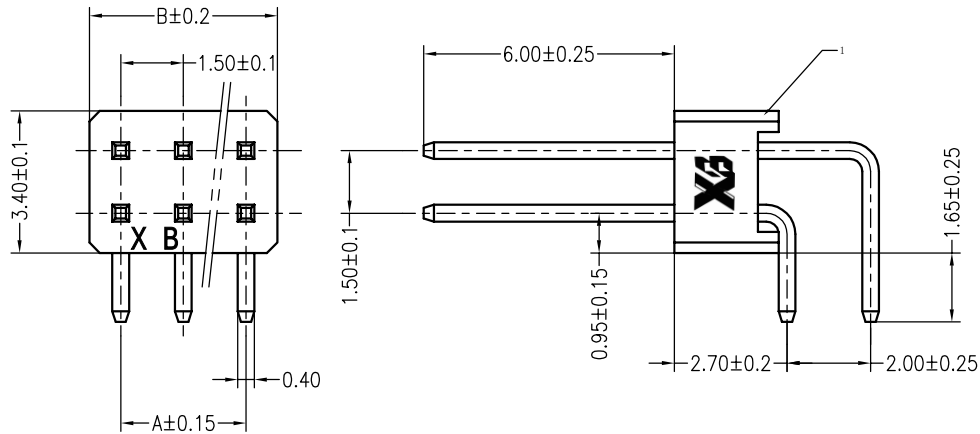

主要技术参数 Main Specifications

线 数 (Poles): 04 to 16

接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:


XB- L1501AW-2-F6MB2-P**


PART No.
No.OF CIRCUITS:
202~208
PLASTIC MATERIAL:
F6M=LCP(BEIGE)

PACKAGING:
P=PE
Metal code:
2=Brass
PLATING:
B=MATTE Sn

PIN.	DIM A	DIM B
2*2	1.50	3.00
2*3	3.00	4.50
2*4	4.50	6.00
2*5	6.00	7.50
2*6	7.50	9.00
2*7	9.00	10.50
2*8	10.50	12.00

PCB LAYOUT

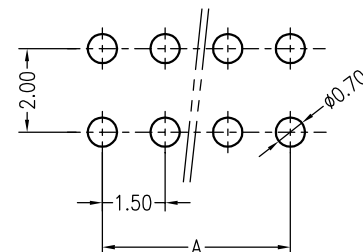

C				
B	CONTACT		4~16 PCS	Brass
A	HOUSING		1 PCS	LCP
				UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL
				FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD TITLE: - -				
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		L1501AW-2**-F6MB2-P	
.XX±0.25	.XX±1'	APPD: 谭龙清	DWG NO.:	
--	--	CHKD: 田峰		
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1