
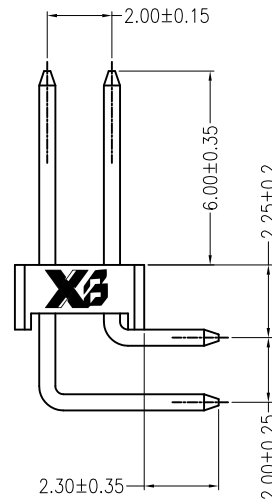
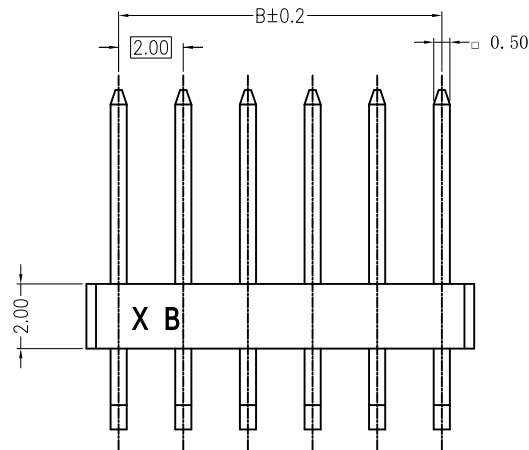
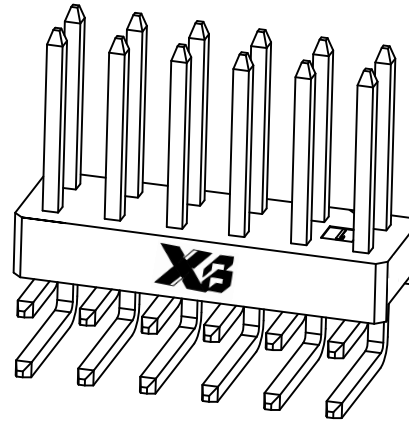



REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Lingqing	2020/05/06

Specifications:

Contact resistance:≤60mΩ
Insulation resistance:≥100MΩ
Rated voltage:275V AC DC
Rated current:1.0A AC DC
Withstand Voltage: 500V AC/minute
Temperature Range:−40℃~+105℃
Housing:LCP UL94V−0,Natural(Beige)
Contacts:Brass/Matte Sn-plated

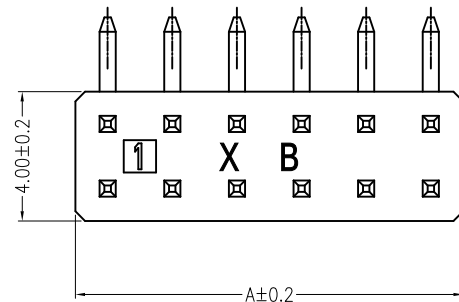

PIN.	DIM A	DIM B
2*2	4.0	2.0
2*3	6.0	4.0
2*4	8.0	6.0
2*5	10.0	8.0
2*6	12.0	10.0
2*7	14.0	12.0
2*8	16.0	14.0

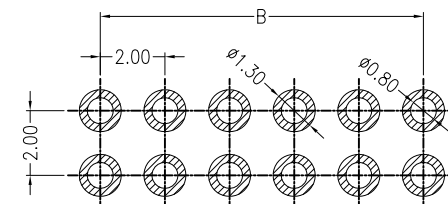

RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05mm

ORDER INFORMATION:

XB- L2004AW- 2**- F8MB2- P

PART No.

No.OF CIRCUITS:

2**

PLASTIC MATERIAL:

F8M=LCP

PACKAGING:

P=PE

Metal code:

2=BRASS

PLATING:

B=MATTE Sn

东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: 2.0mm pitch 90°Wafe DIP type	
GENERAL TOLERANCE		USE: CUSTOMER	
X. ±0.50	X. ±5°	APPD: Shaojinghe	
X.X ±0.30	X.X ±2°	CHKD: Fangsongle	
X.XX ±0.20	X.XX ±1°	DR: Zenglingqing	
UNITS: mm		PART NO.: L2004AW-2**-F8MB2-P	
		DWG NO.:	
		SCALE 1 : 1	SHEET 1 / 1