

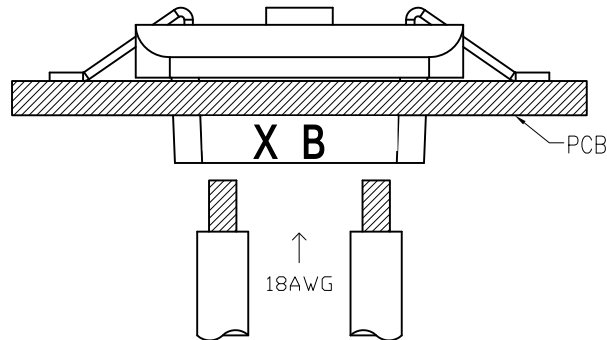


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Lingqing	2019/11/30

Specifications:
 Contact resistance:≤20mΩ
 Insulation resistance:≥1000MΩ
 Rated voltage:275V AC DC
 Rated current:2.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: -40℃~ +120℃
 Housing:LCP UL94V-0,BEIGE
 Contacts:Phosphor bronze/MATTE Sn-plated

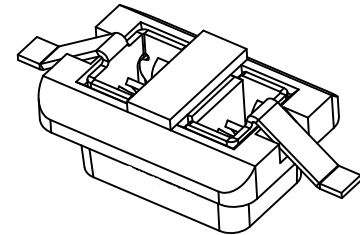

Assembly Layout

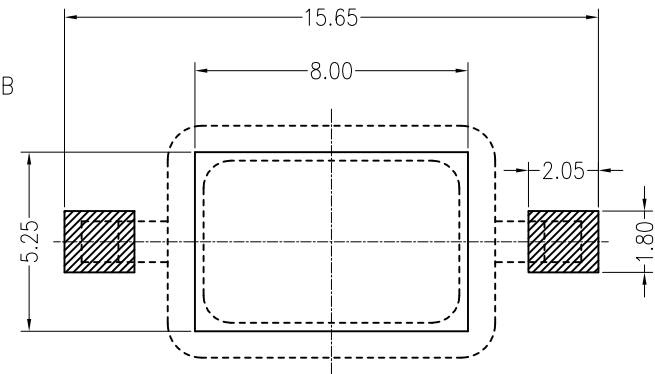

Board Layout
 General Tolerance:±0.05

ORDER INFORMATION:

XB-L4501AFV-02-F8MB1-R

PART No.

No.OF CIRCUITS:

02

PLASTIC MATERIAL:

F8M=LCP

PACKAGING:

R=REEL

Metal code:

1=PhosphorBronze

PLATING:

B=MATTE Sn

XB 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				TITLE: 4.5Pitch 180°wafer smt type	
GENERAL TOLERANCE		USE:		PART NO.:	
X. ±0.50	X. ±5°	CUSTOMER		L4501AFV-02-F8MB1-R	
X.X ±0.30	X.X ±2°	APPD:		DWG NO.:	
X.XX ±0.20	X.XX ±1°	Liuzhengling			
		CHKD: Steven			
		DR: Zenglingqing			
⊕ UNITS: mm		SCALE		SHEET	
		1 : 1		1 / 1	