

A

B

C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.11.14

1

2

3

4

5




1

2

3



4

5

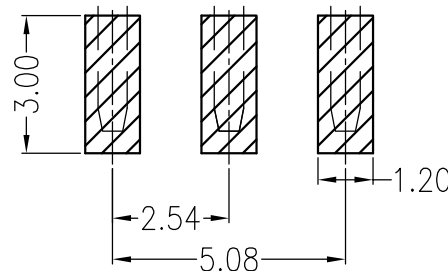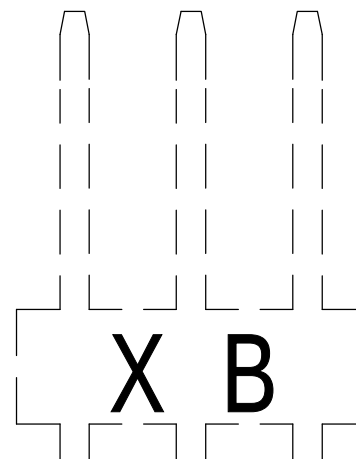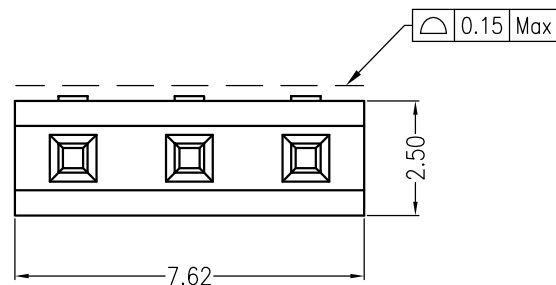

Board Layout

General Tolerance: ± 0.05

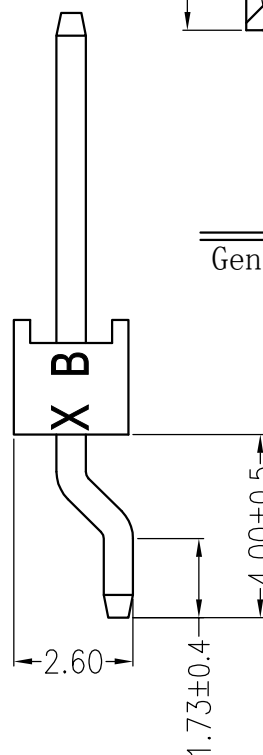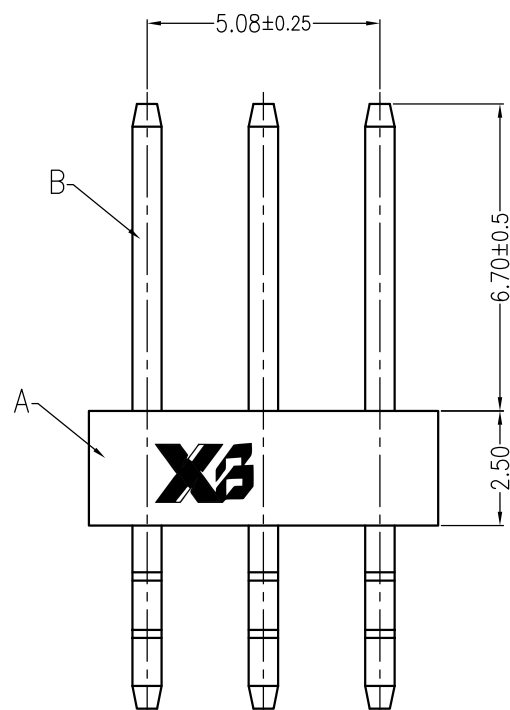

主要技术参数 Main Specifications

线 数 (Poles): 02 to 04

接触电阻 (Contact resistance): $\leq 20m\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

XB-L015AWR-03-B1MB2-*2	
PART No.	SPECIAL CODE:
No. FOR CIRCUITS:	2=外露针长:6.7
03	PACKAGING:
	P=PE
	R=REEL
PLASTIC MATERIAL:	Metal material:
B1M=PA46 (BEIGE)	2=Brass
	PLATING:
	B=MATTE Sn

C				
B	CONTACT	3 PCS	Brass	MATTE Sn-plated
A	PEDESTAL	1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司		TITLE: -		
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		2.54mmPITCH 90°WAFER SMT TYPE		
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L015AWR-03-B1MB2-*2	
.XX±0.25	.XX±1°	APPD:	DWG NO.:	
--	--	邵敬和	GCCP-1259	
		CHKD:	SCALE	SHEET
UNITS:	DR:	田 峰	1 : 1	1 / 1
mm	蒋建银			