
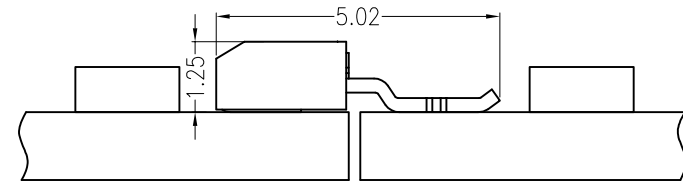
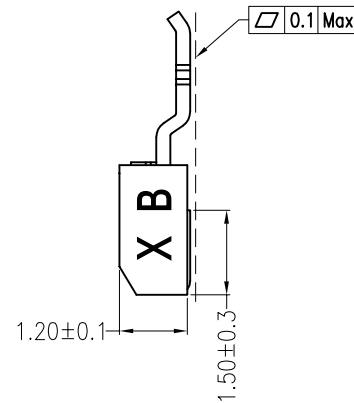


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

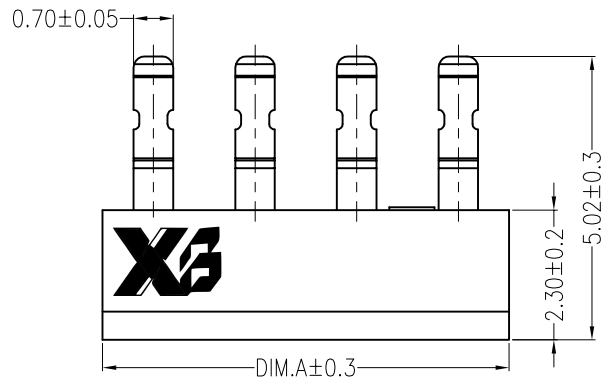

Assembly Layout


主要技术参数 Main Specifications

线 数 (Poles): 02 to 04
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$


ORDER INFORMATION:

XB-L030--F2MB-R**


PART No. _____
 No. FOR CIRCUITS: _____
 02-04
 PLASTIC MATERIAL: _____
 F2M=LCP (BEIGE)
 PACKAGING:
 P=PE
 R=REEL
 PLATING:
 B=MATTE Sn

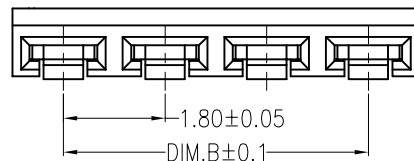

Circuit	Dimensions (mm)	
	DIM. A	DIM. B
02	3.60	1.80
03	5.40	3.60
04	7.20	5.40

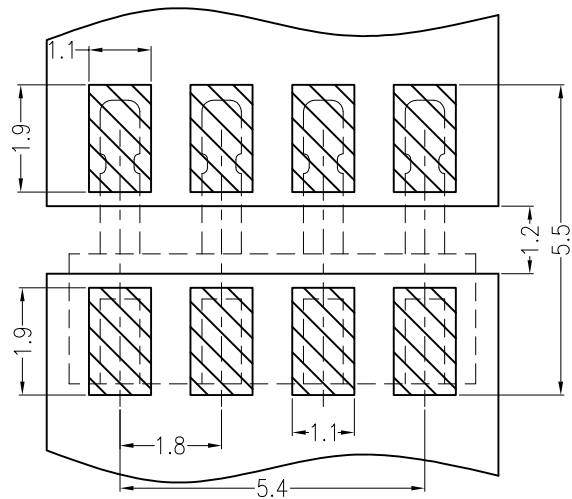

Board Layout



C				
B	CONTACT	2~4 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
X3 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.: L030-**-F2MB-R
.X±0.3	.X±2°	APPD: 周秀龙		DWG NO.:
.XX±0.25	.XX±1°	CHKD: 田峰		SCALE 1 : 1
--	--	DR: 蒋建银		SHEET 1 / 1
⊕	⚡	UNITS: mm		