

A	B	C	D
Customized products	MOQ	50000PCS	

E	F
REV	DESCRIPTION
AO	NEW RELEASE
DESIGN	DATE
Jiangjianyin	2020/09/25

Specifications:

Poles: 02 to 04

Contact resistance: $\leq 30\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated voltage: 275V AC DC

Rated current: 1.0A AC DC

Withstand Voltage: 1000V AC/minute




Temperature Range: $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

Housing: PA46 UL94V-0, Natural (Beige)

Contacts: Brass/MATTE Sn-plated

ORDER INFORMATION:

XB-L2001AW-04-B1MB2-P-4			
PART No.		SPECIAL CODE:	
No. FOR CIRCUITS:		4=curved needle 3.0*10.30*2.6	
04		PACKAGING:	
PLASTIC MATERIAL:		P=PE	
B1M=PA46(NATURAL)		Metal code:	
		2=Brass	
		PLATING:	
		B=MATTE Sn	

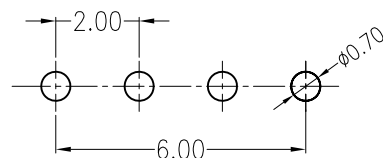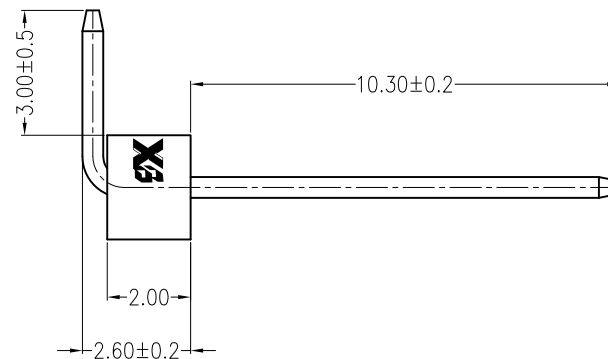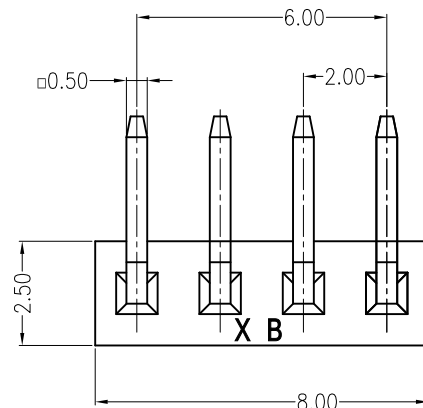

Board Layout

General Tolerance: ± 0.05

 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD			TITLE:	
			2.0mmpitch 90°Wafe dip type	
GENERAL TOLERANCE		USE:		PART NO.:
X. ± 0.50	X. $\pm 5^{\circ}$	CUSTOMER		L2001AW-04-B1MB2-P-4
X.X ± 0.30	X.X $\pm 2^{\circ}$	APPD: Liuzhenling		DWG NO.:
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	CHKD: Wangliang		
UNITS: mm		DR: Jiangjianyin		SCALE
				1 : 1
				SHEET
				1 / 1