

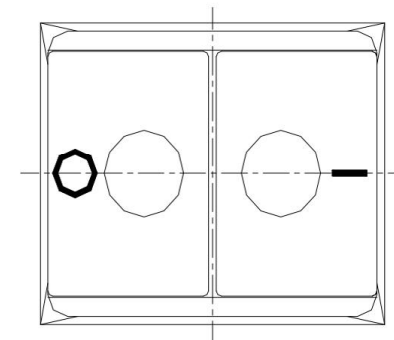
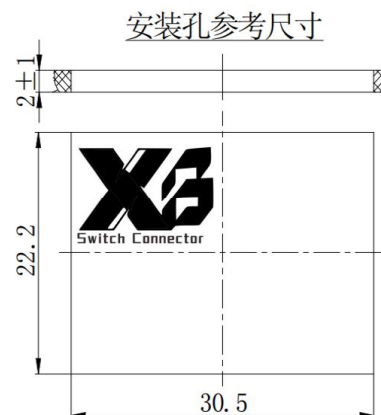


CAD FILE:

ROHS

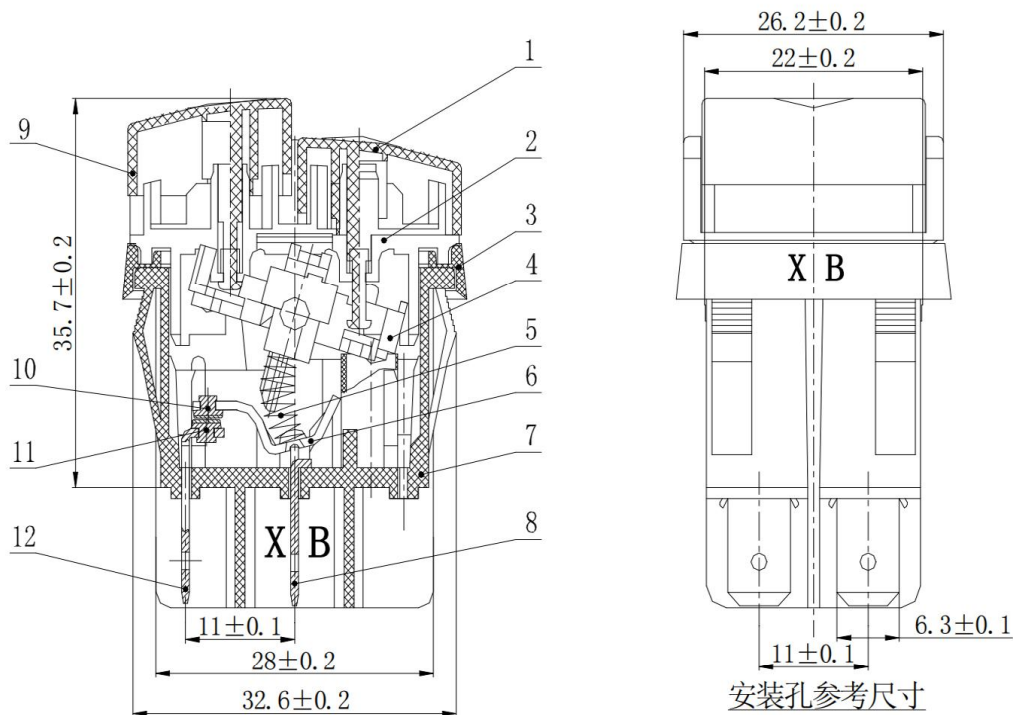

电原理图



|    |       |               |    |               |       |
|----|-------|---------------|----|---------------|-------|
| 12 | 静片端子  | Q/HH7.750.067 | 2  | H62Y2 t0.8    | D. Ag |
| 11 | 静触点   | Q/HH7.732.004 | 2  | AgNi10/Cu     |       |
| 10 | 动触点   | Q/HH7.732.003 | 2  | AgNi10/Cu     |       |
| 9  | 按钮(凹) | Q/HH8.337.038 | 1  | PA66(1300S)黑色 |       |
| 8  | 支架端子  | Q/HH8.725.030 | 2  | H62Y2 t0.8    | D. Ag |
| 7  | 基座    | Q/HH7.810.050 | 1  | PA66(1300S)黑色 |       |
| 6  | 动触片   | Q/HH7.730.027 | 2  | H62Y2 t0.8    | D. Ag |
| 5  | 弹簧    | Q/HH8.382.034 | 2  | 弹簧钢丝70B组      | 镀锌    |
| 4  | 拔杆座   | Q/HH7.810.051 | 1  | PA66(1300S)黑色 |       |
| 3  | 防水框   | Q/HH8.780.020 | 1  | 硅橡PU(黑色)      |       |
| 2  | 安装座   | Q/HH7.810.052 | 1  | PA66(1300S)黑色 |       |
| 1  | 按钮(凸) | Q/HH8.337.038 | 1  | PA66(1300S)黑色 |       |
| 序号 | 名称    | 图号            | 数量 | 材质            | 备注    |

|     |         |                 |      |                 |                                                                                                   |       |           |                          |                          |
|-----|---------|-----------------|------|-----------------|---------------------------------------------------------------------------------------------------|-------|-----------|--------------------------|--------------------------|
| 8   |         |                 |      |                 | TOLERANCE                                                                                         |       |           |                          |                          |
| 7   |         |                 |      |                 | UNLESS SPECIFIED                                                                                  |       |           |                          |                          |
| 6   |         |                 |      |                 | WITHIN 1.5mm : ±0.1mm                                                                             | A     | 2012-9-25 | 初版                       | ZENQ. CHEN               |
| 5   |         |                 |      |                 | OVER 1.5mm : ±0.2mm                                                                               | ISSUE | DATE      | DESCRIPTIONS OF REVISION | APPD.                    |
| 4   | CONTACT | SUS             | 1    | Ag CLAD         | TITLE : Push Switch                                                                               |       |           | UNIT : mm                | DRWG NO.: XB-KAG-02A21   |
| 3   | CASE    | PPA/BRASS SRTIP | 1    | BLACK/Ag PLATED | MODEL: XB-KAG-02A21                                                                               |       |           | SCALE: 5:1               | DWN. JUN. YANG 2012-9-25 |
| 2   | COVER   | STEEL STRIP     | 1    | Ni PLATED       |  东莞市溪榜电子有限公司 |       |           | CHK'D                    | DONG. PANG 2012-9-25     |
| 1   | KNOB    | PPA             | 1    | BLACK           |                                                                                                   |       |           | APPD.                    | ZENQ. CHEN 2012-9-25     |
| NO. | PARTS   | MATERIALS       | Q'TY | FINISH          | DONG GUAN XI BANG ELECTRONI CS CO., LTD.                                                          |       |           |                          |                          |