

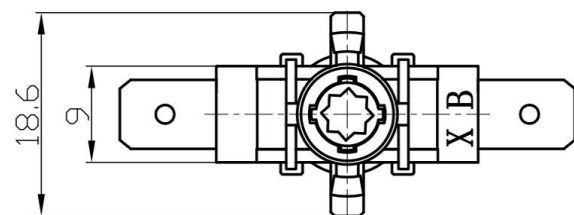
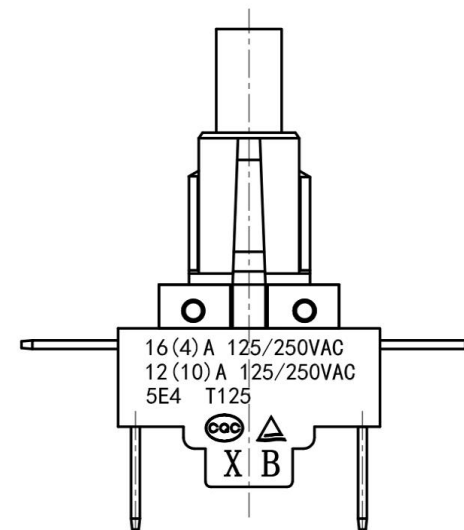


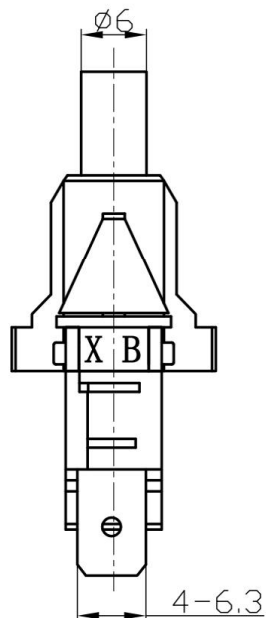


CAD FILE:

ROHS

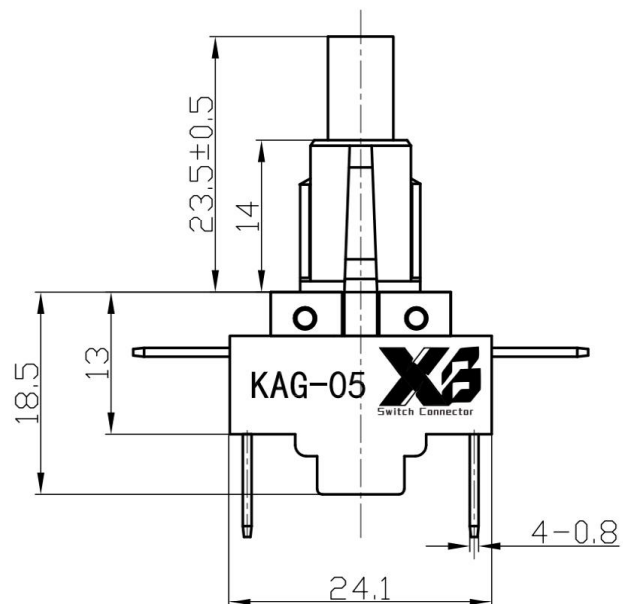

电原理图



电源参数: 16(4)A 125V/ 250V AC 12(10)A 125V/250V AC

接触电阻: $\leq 50\text{m}\Omega$ 绝缘电阻: $\geq 100\text{M}\Omega$

介电强度: 极与极1500VAC, 极与壳3000VAC

环境温度: T125

电气寿命: 5E4

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版		ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch			UNIT : mm	DRWG NO.: XB-KAG-05-4P	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-KAG-05-4P			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	2012-9-25	
1	KNOB	PPA	1	BLACK					DONG. PANG	
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	ZENQ. CHEN	