
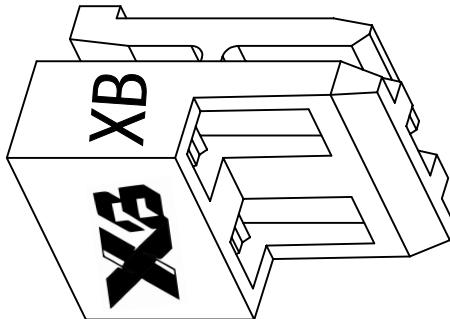
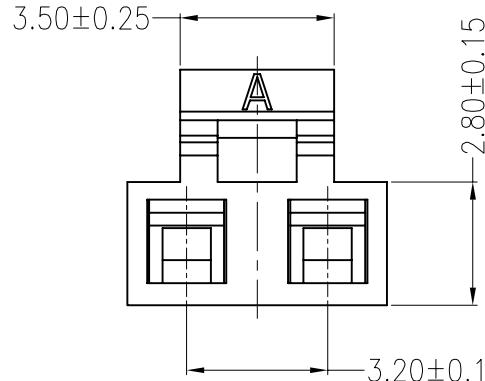
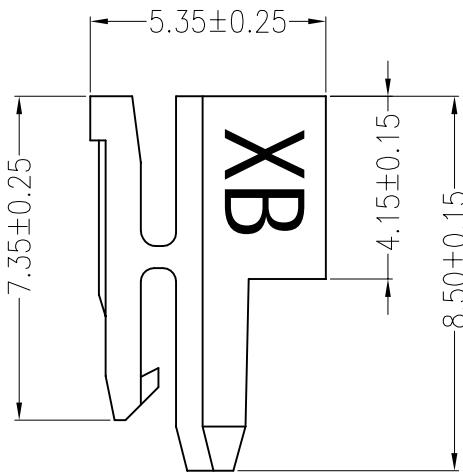


A | B | C | D | E | F  
客户料号: | | | | | |

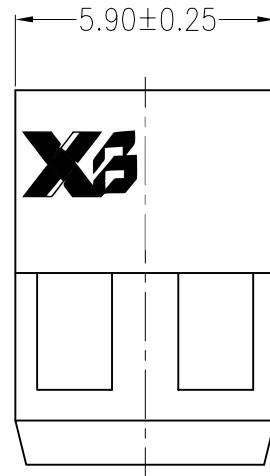

### 主要技术参数 Main Specifications

线数 (Poles): 02

接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 2.0A AC DC

耐电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range) :  $-25^\circ\text{C} \sim +85^\circ\text{C}$

### ORDER INFORMATION:

XB-L002-02-B1M-P

PART No.

No. OF CIRCUITS:

02

PLASTIC MATERIAL:

B1M=PA46(BEIGE)

PACKAGING:  
R=REEL  
P=PE

东莞市溪榜电子有限公司  
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

MODEL NO:L002Y-02-B1M-P

MODEL NAME:3.20mmPITCH Housing

APPROVED BY		UNIT	TOLERANCE	LTP.	REVISION RECORD	NAME	DATE	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
邵敬和		MM	X. X	$\pm 0.30$	①			A	Insulator	1	PA46(UL94V-0)	Beige
CHECKED BY	胡肖丰	SCALE	X. XX	$\pm 0.20$	②			B				
DRAWN BY		FULL	X. XXX	$\pm 0.10$	③			C				
DRAWN BY	张一荣	DATE	REVISION	ANGLE	④							
MODEL NAME		2014. 03. 18	A/1	X°	$\pm 3.0^\circ$	⑤						

DwgNo. GCCP-0004

A

B

C

D

E

F