
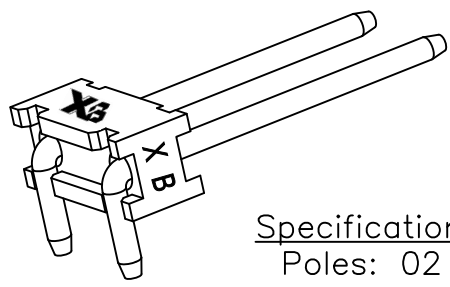
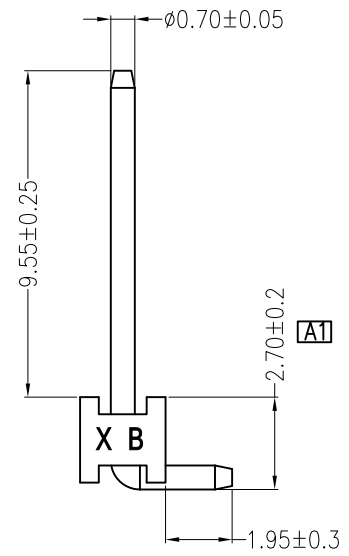


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	吴丹平	2015/10/23
A1	按当前机台可管控精度更改公差	Jiangjanyin	2019/08/17

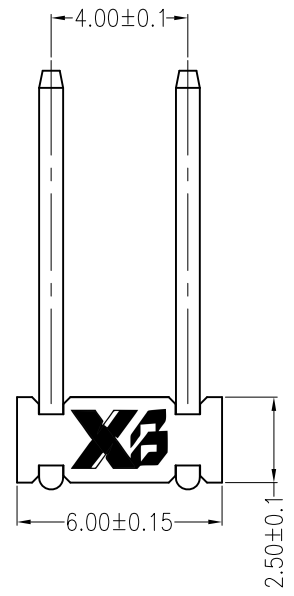

Specifications:

Poles: 02

Contact resistance: $\leq 20\text{m}\Omega$

Insulation resistance: $\geq 1000\text{M}\Omega$

Rated voltage: 250V AC DC

Rated current: 2.0A AC DC




Withstand Voltage: 2000V AC/minute

Temperature Range: $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

Housing: PA46 UL94V-0, Natural (Beige)

Contacts: Brass/Ni-plated

ORDER INFORMATION:

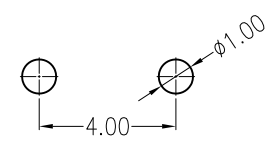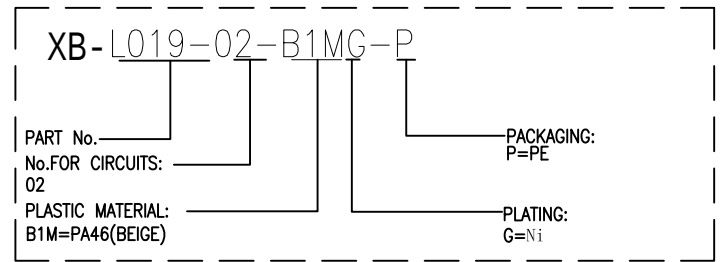

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: -	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.: L019-02-B1MG-P
X. ± 0.50	X. $\pm 5^{\circ}$	APPD: Liuzhenling	DWG NO.: GCKH-0036
X.X ± 0.30	X.X $\pm 2^{\circ}$	CHKD: Wangliang	SCALE 1 : 1
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	DR: Jiangjanyin	SHEET 1 / 1
 UNITS: mm			