

A

B




C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.04.21

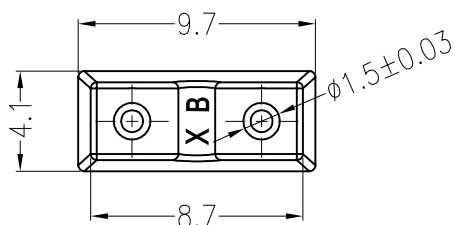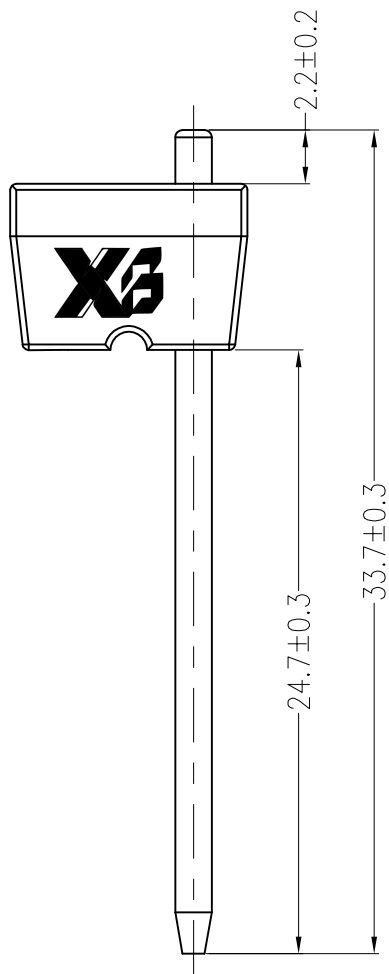

Board Layout

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$ 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC


额定电流 (Rated current): 3.0A AC DC

耐 电 压 (Withstand Voltage): 1800V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L025B-02-B1MG2-P-1					
PART No.					SPECIAL CODE: 1=直针24.7*2.2
No. FOR CIRCUITS:					PACKAGING: P=PE
02					Metal code: 2=Brass
PLASTIC MATERIAL:					PLATING: G=Ni
B1M=PA46 (BEIGE)					

C					
B	CONTACT		1 PCS	Brass	Ni-plated
A	HOUSING		1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO.,LTD TITLE: L025B-02-1P 5.3Pitch 180°wafer dip type					
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2°		L025B-02-B1MG2-P-1		
.XX±0.25	.XX±1°		DWG NO.:		
--	--		GCCP-0454		
	UNITS: mm	DR: 吴丹平	SCALE 1 : 1		SHEET 1 / 1