

REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Fangsongle	2019/05/09

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$

Rated voltage: 250V AC DC

Rated current: 3.0A AC DC



Temperature Range: $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Contacts: Phosphor Bronze / Matte Sn-plated

ORDER INFORMATION:

XB-L027B -01-000B1-R		
PART No.:		PACKAGING: R=REEL
No.OF CIRCUITS: 01		Metal code: 1=Phosphor Bronze
PLASTIC MATERIAL: 000		PLATING: B=Matte Sn

Board Layout

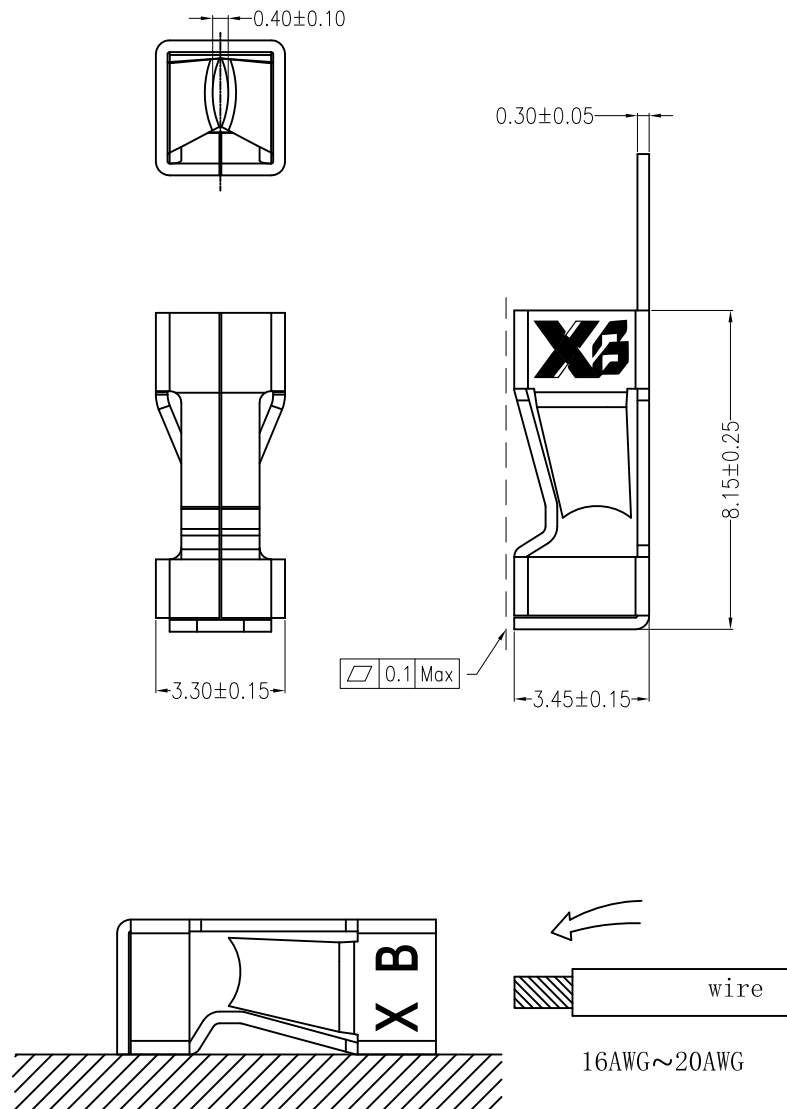

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE		USE:
X. ± 0.50	X. $\pm 5^{\circ}$	CUSTOMER
X.X ± 0.30	X.X $\pm 2^{\circ}$	APPD: Wangliang
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	CHKD: Liuzhengling
UNITS: mm		DR: Fangsongle

TITLE: -	PART NO.: L027B-01-000B1-R
DWG NO.: GCKH-2055	SCALE 1 : 1
SHEET 1 / 1	