
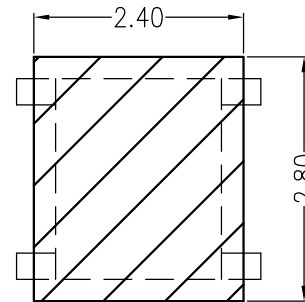


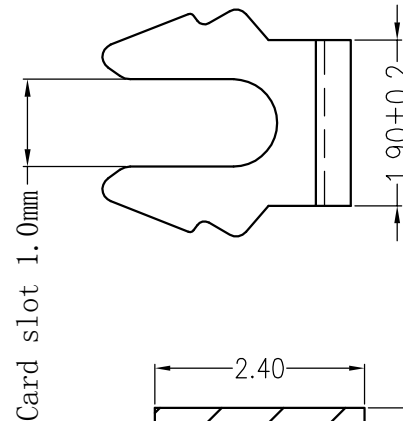


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.10.16




Board Layout
General Tolerance: ± 0.05

主要技术参数 Main Specifications

线 数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance):
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage):
温度范围 (Temperature Range):


ORDER INFORMATION:

XB-L036K-1.0-000B2-R			
PART No.		PACKAGING:	
No. FOR CIRCUITS:		R=REEL	
1.0=Card slot1.0		P=PE	
PLASTIC MATERIAL:		Metal material:	
000=No plastic		2=Brass	
		PLATING:	
		B=MATTE Sn	

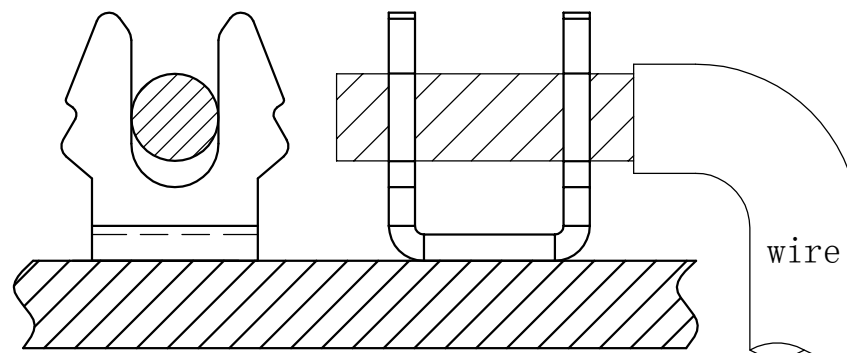

Assembly Layout

Card slot 1.0mm 20AWG

C					
B					
A	CONTACT		1 PCS	Brass	MATTE Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: —					
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2°			L036K-1.0-000B2-R	
.XX±0.25	.XX±1°	APPD: 邵敬和		DWG NO.:	
--	--	CHKD: 田峰		GCCP-1235	
	UNITS: mm	DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1