

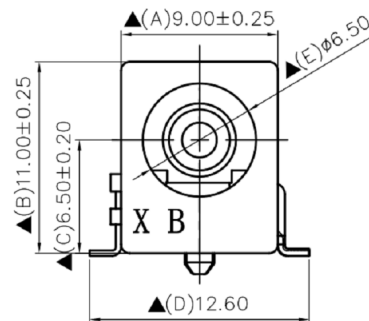



ROHS


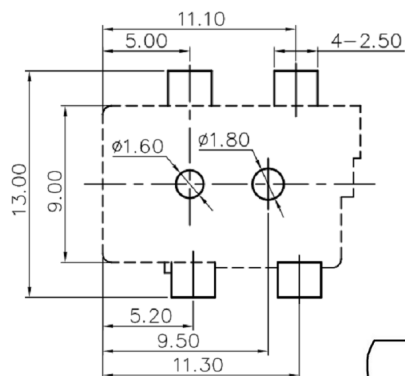


SPECIFICATION

1. Rating : DC 12V 30V, 1.0A 3.0A
2. Contact resistance : $\leq 30\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

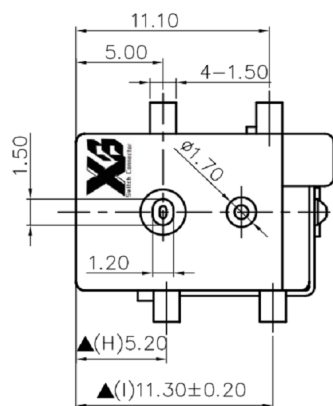

Pin Hole Layout (Jack Bottom View)

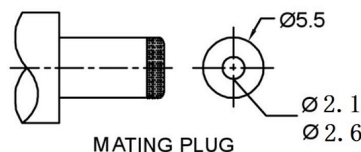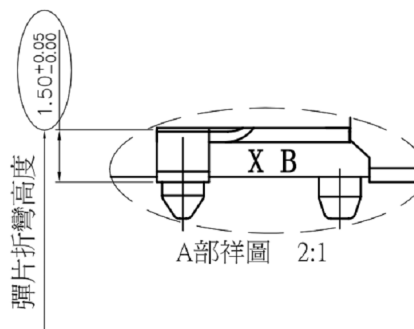

SCHEMATIC	
MODEL NO	C

6.	Housing	PA9T	1	Black Color
5.	Cover	PA9T	1	Black Color
4.	Pin(2.0ø)	Copper	1	Nickel Plated
3.	Sleeve Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Pin Terminal	0.3T Bronze	1	Silver Plated
1.	Break Terminal	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

8				TOLERANCE UNLESS SPECIFIED					
7									
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-0050M-SMT	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0050M-SMT		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED					2012-9-25
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司		CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN	2012-9-25