
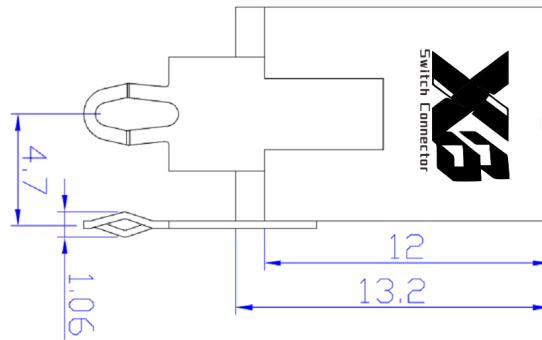
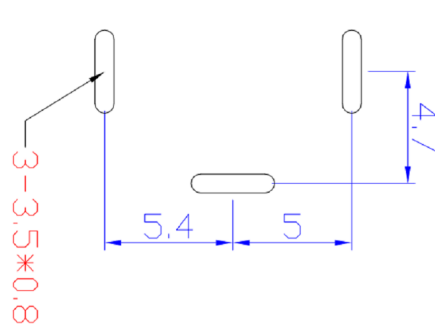
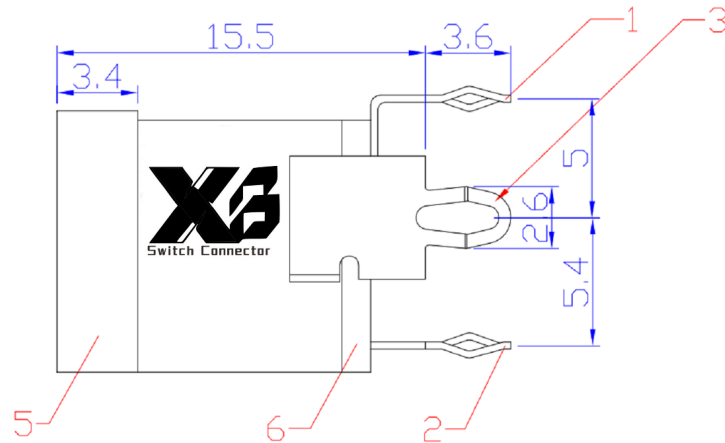



CAD FILE:

ROHS

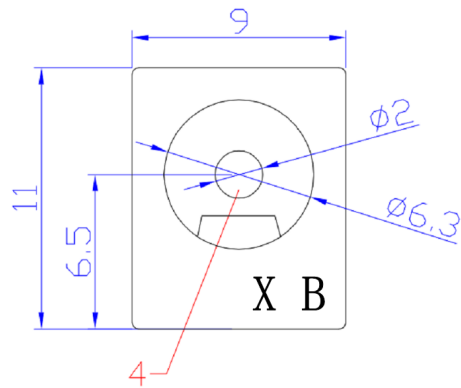

SPECIFICATION

1. Rating : DC 12V 30V , 1.0A 3.0A
2. Contact resistance : $\leq 30m\Omega$
3. Insulation resistance : $\geq 100M\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

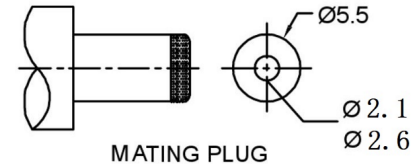

MATING PLUG

SCHEMATIC	
CENTER PIN	$\phi 2.0mm$ $\phi 2.5mm$

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1mm$	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-0130X
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0130X			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D DONG. PANG 2012-9-25	
1	KNOB	PPA	1	BLACK	APPD. ZENQ. CHEN 2012-9-25				
NO.	PARTS	MATERIALS	Q'TY	FINISH					