

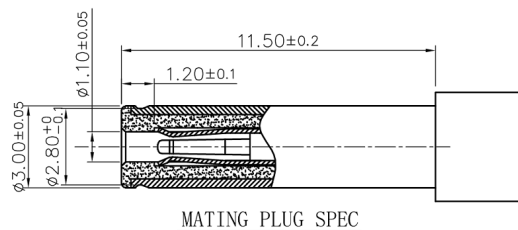
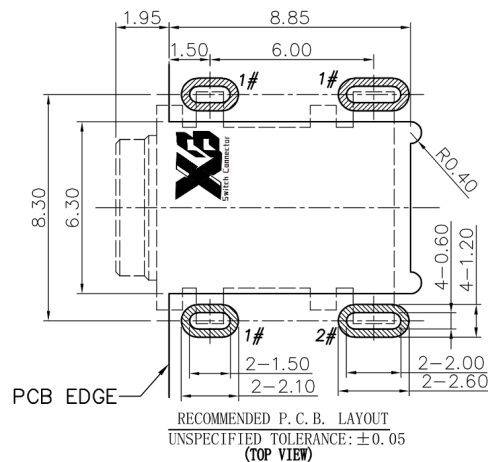


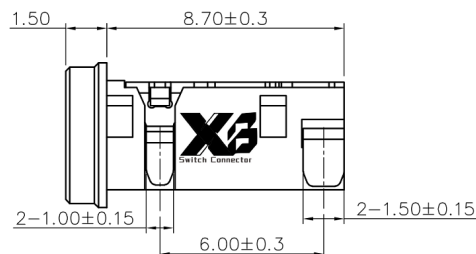
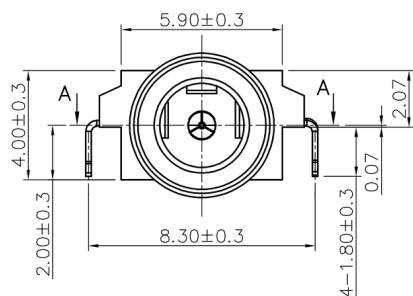


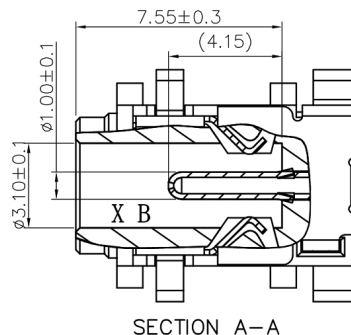

CAD FILE:

ROHS

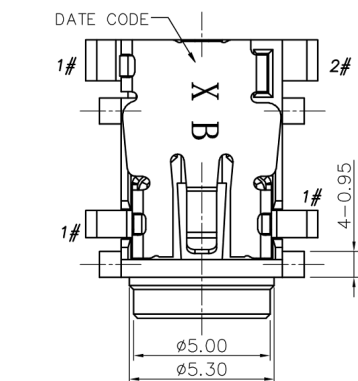

DATE CODE:
XB-DC-0198S
YEAR | Date
Month

- Ordering information:
XB-DC-0198S
(1) (2) (3) (4) (5) (6) (7) (8)
- (1): Series No.
(2): Schematic option: B
(3): Center pin diameter:
C=φ1.00
(4): Material of housing:
10=PA10T
(5): Housing color:
OA=Black
(6): Terminal plating:
G=Gold Flash(Au)
(7): Special option:
0=No special option
(8): Packing mode:
1=Tape Reel packing

SPECIFICATION:

1. ELECTRICAL CHARACTERISTICS:
- 1.1 VOLTAGE&CURRENT RATING: DC 20V MAX & 3.0A.
 - 1.2 CONTACT RESISTANCE: 60mΩ MAX(TEST AFTER).
 - 1.3 INSULATION RESISTANCE: 100MΩ MIN.
 - 1.4 DIELECTRIC WITHSTAND: 500V AC FOR 1 MINUTE.
 - 1.5 OPERATING TEMPERATURE: -45°~+80°.
2. MECHANICAL CHARACTERISTICS:
- 2.1 INSERT FORCE: 0.5~3.0 kgf
 - 2.2 WITHDRAW FORCE: 0.3~3.0 kgf
3. LIFE TEST: 5000 CYCLES

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-0198S	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0198S		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED				2012-9-25	
1	KNOB	PPA	1	BLACK				CHK'D	DONG. PANG
								2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	ZENQ. CHEN
								2012-9-25	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.