

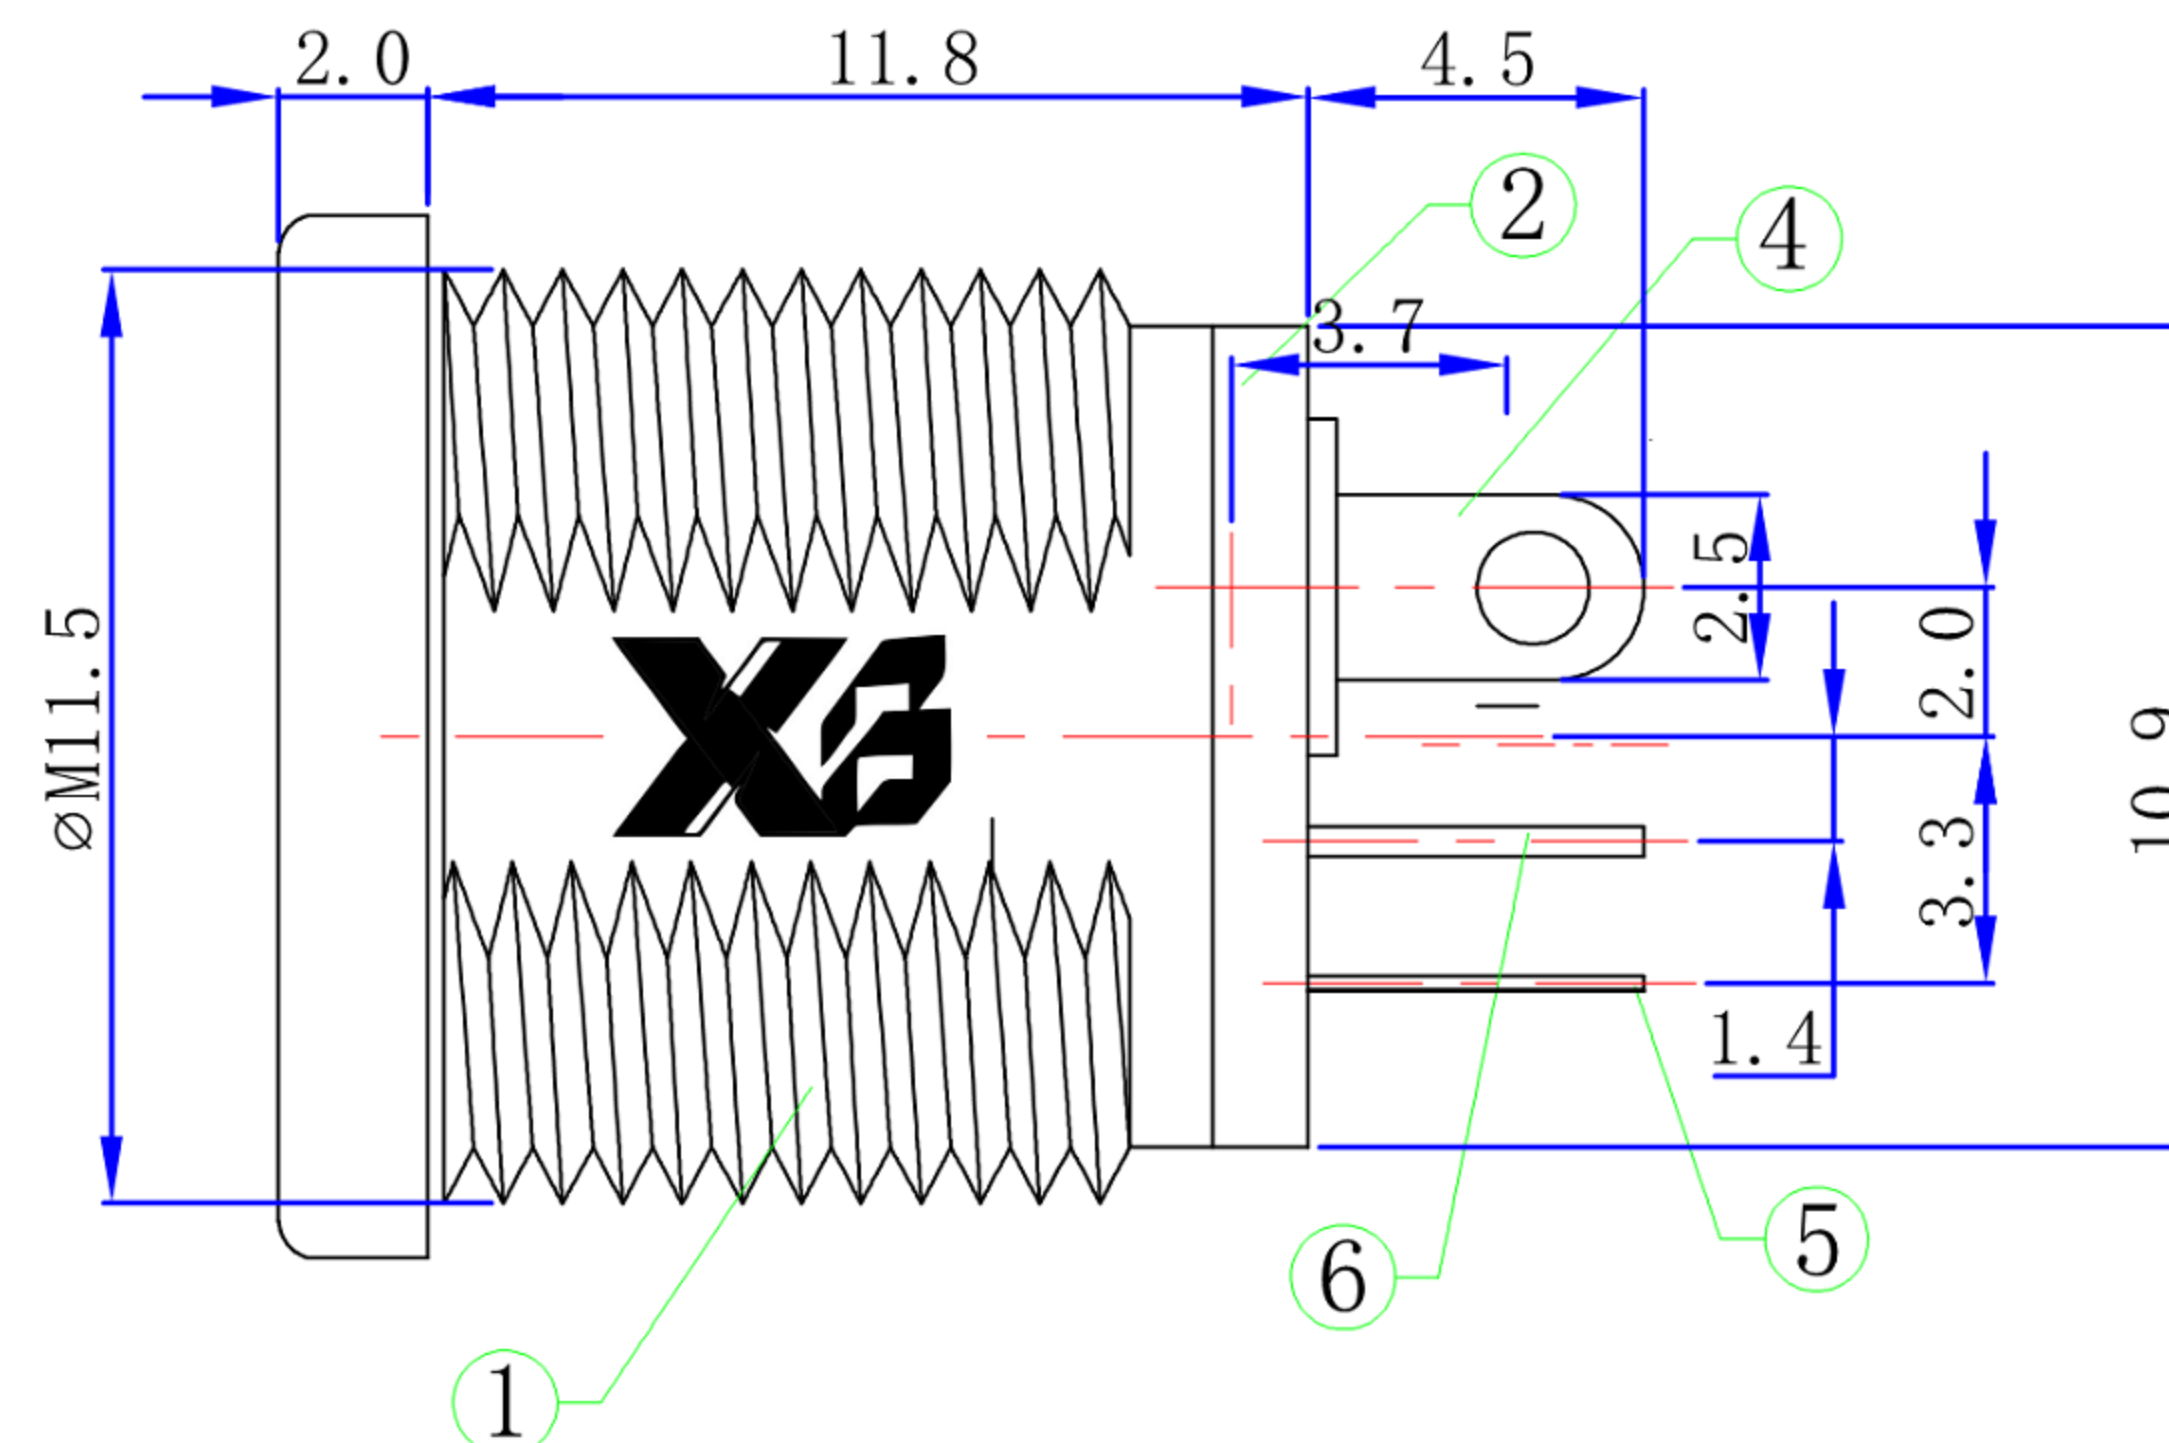
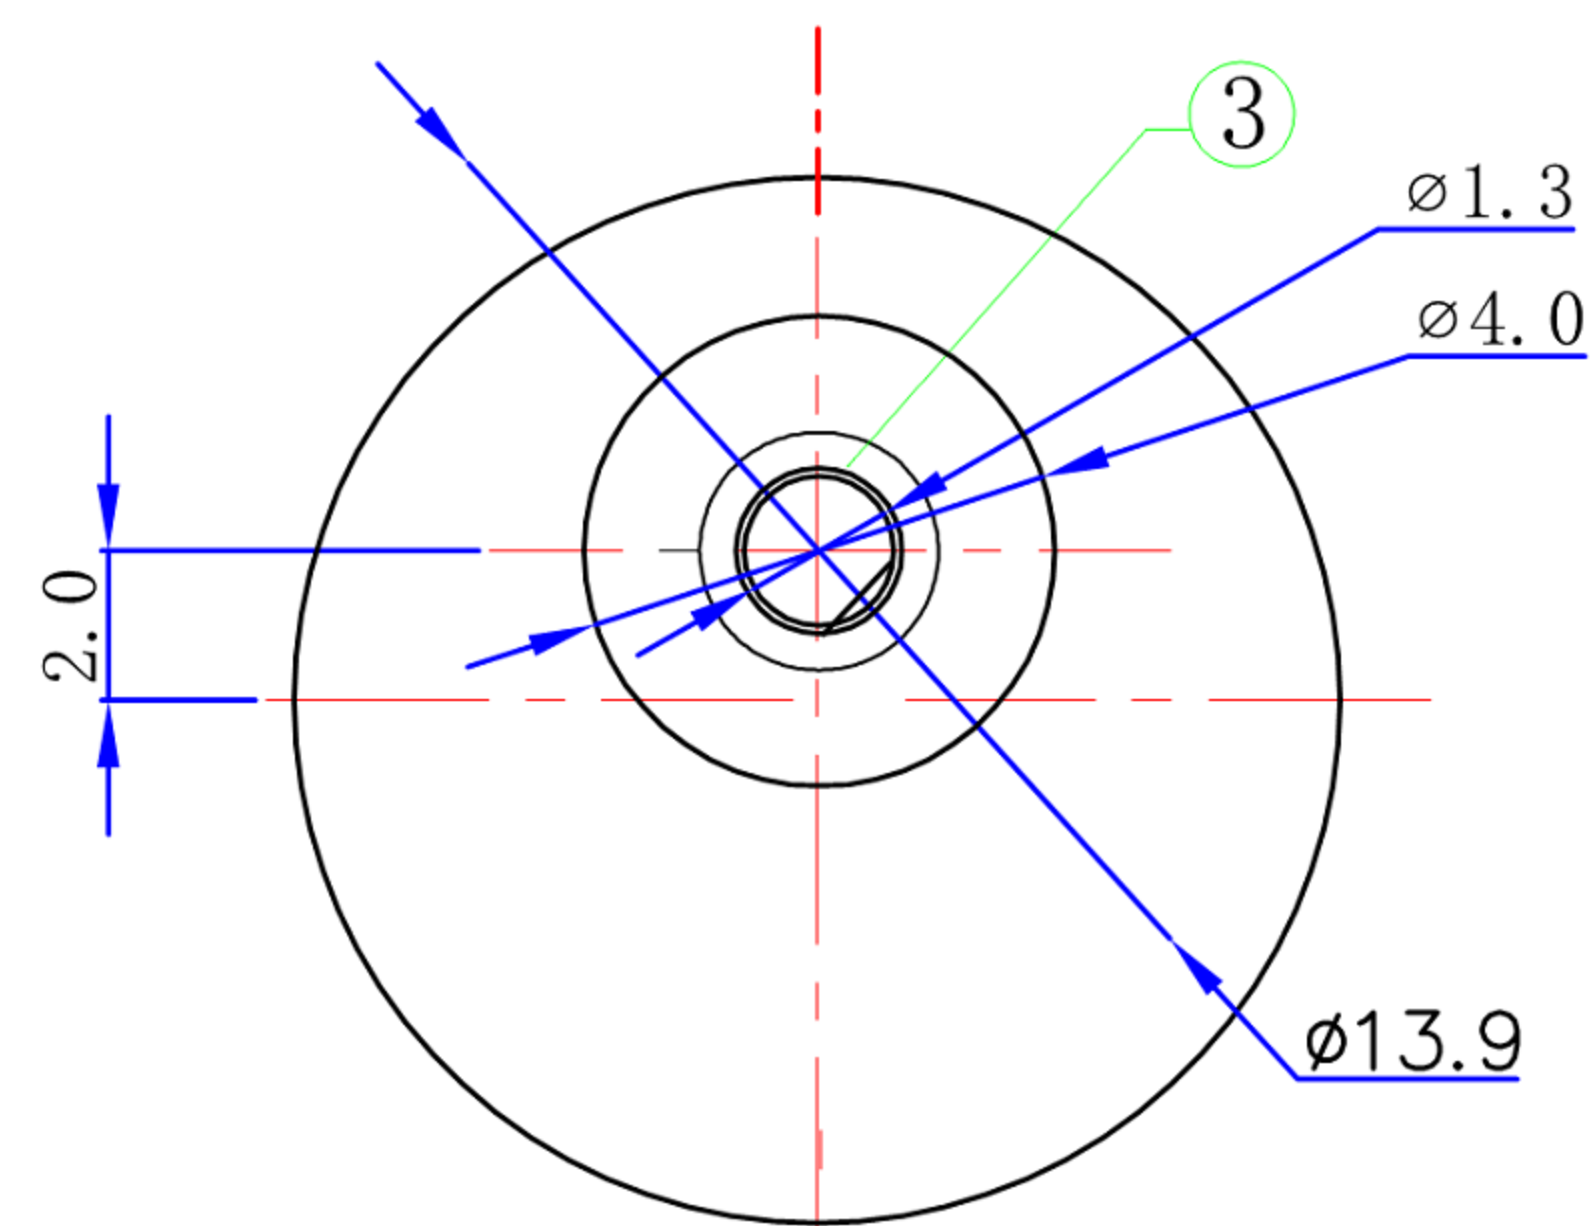


CAD FILE:


ROHS

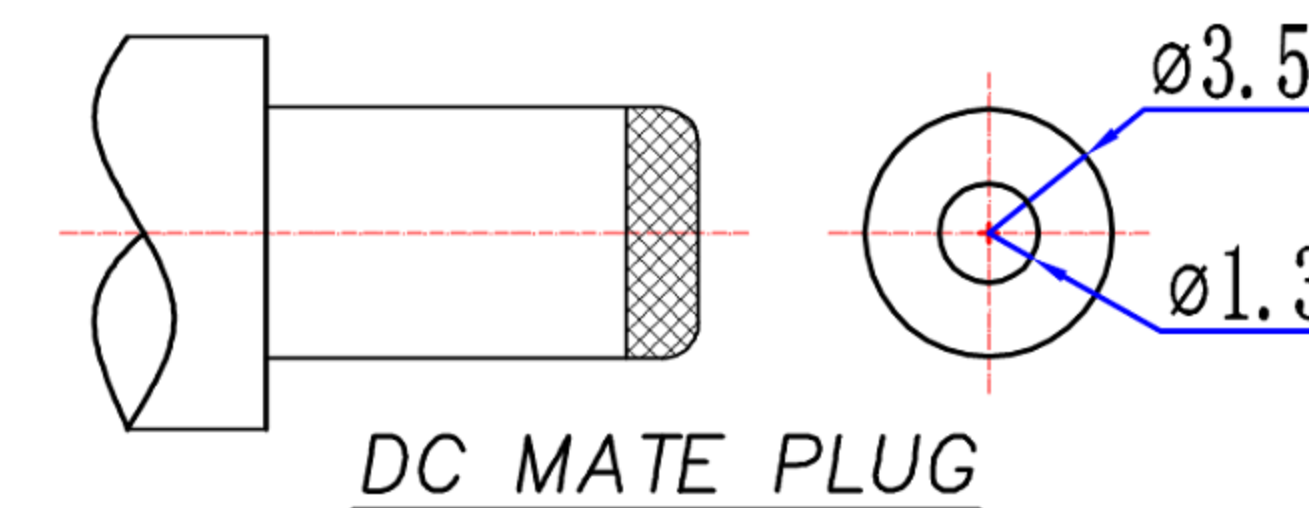

CIRCUIT DIAGRAM

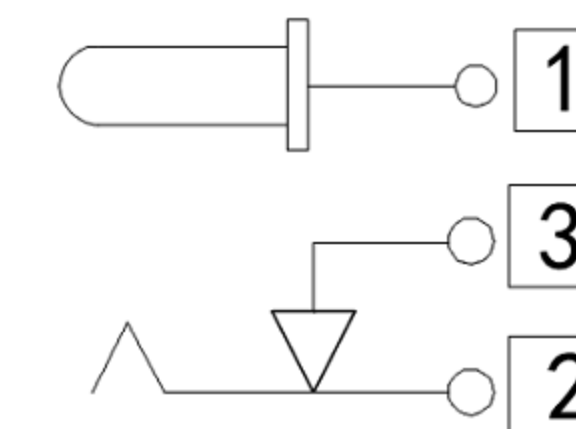

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)

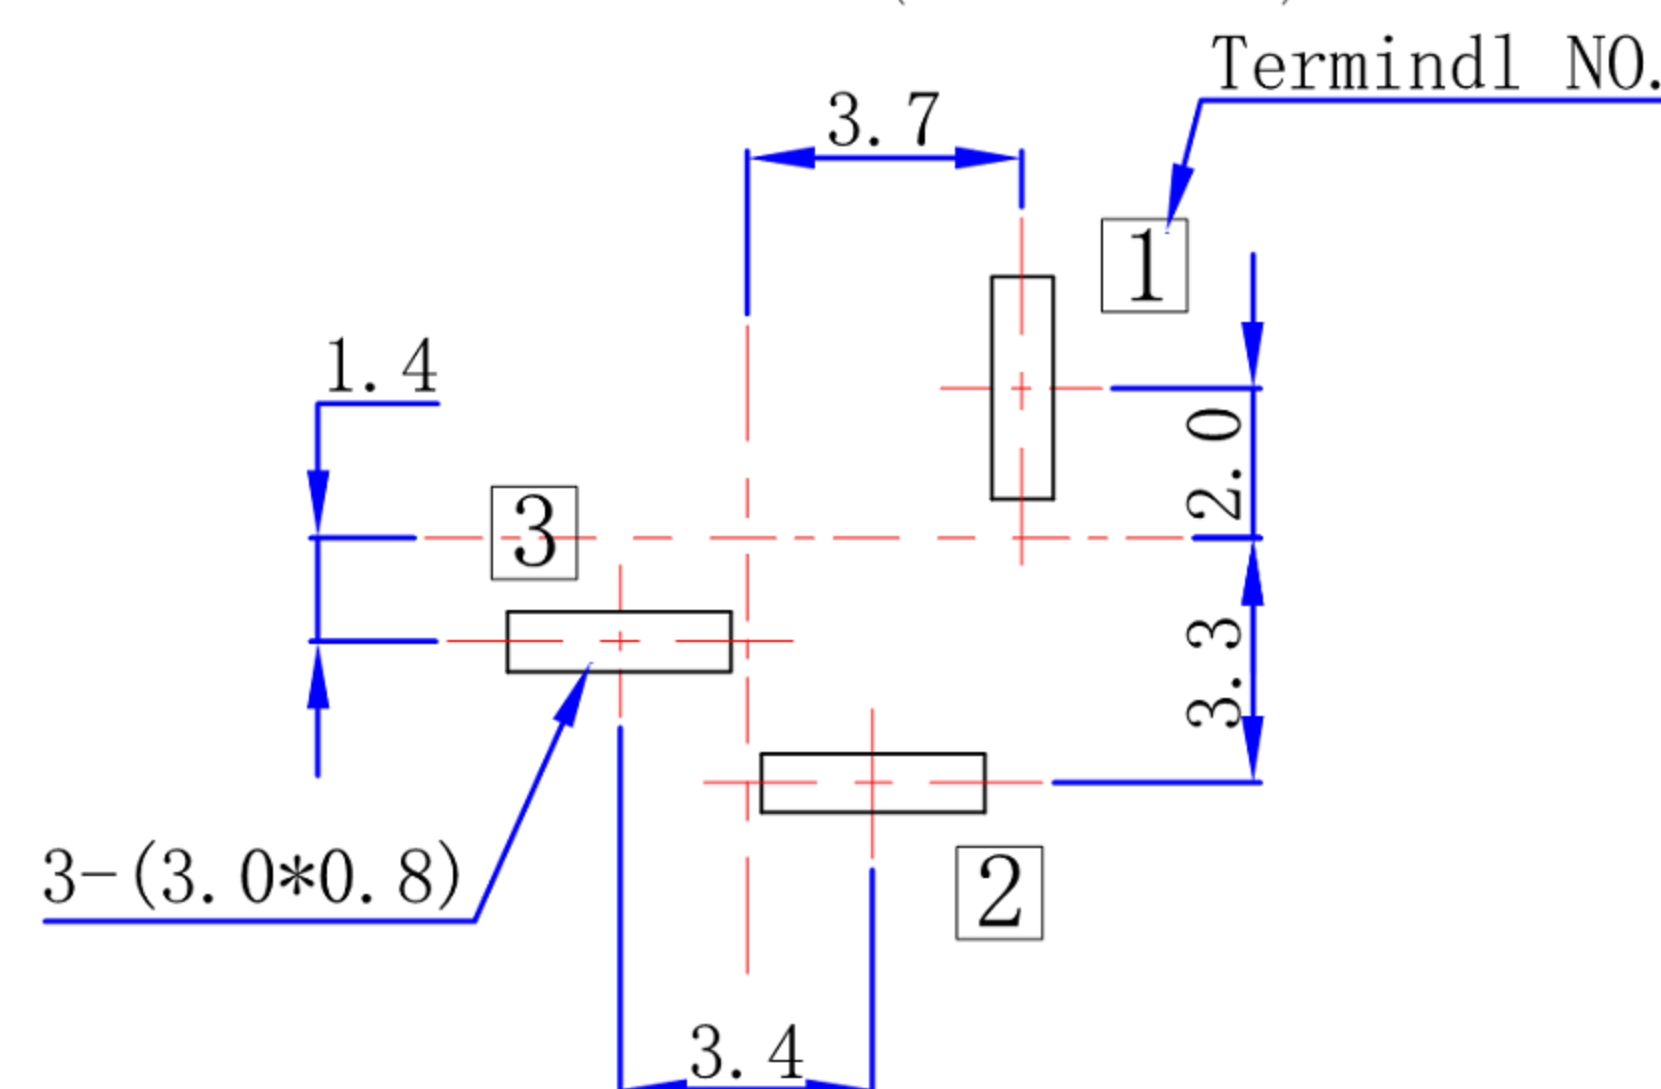

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Current Rating : Max 1.0A 30A , 16V DC
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	DATE	DESCRIPTIONS OF REVISION	APPD.
8					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初版
7					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	ZENQ. CHEN
6								
5								
4	CONTACT	SUS	1	Ag CLAD				
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				
2	COVER	STEEL STRIP	1	Ni PLATED				
1	KNOB	PPA	1	BLACK				
TITLE : DC Power Jack					UNIT : mm		DRWG NO.: XB-DC-022M-130	
MODEL: XB-DC-022M-130					SCALE: 5:1		DWN.	JUN. YANG
							2012-9-25	
							CHK'D	DONG. PANG
							2012-9-25	
							APPD.	ZENQ. CHEN
							2012-9-25	