
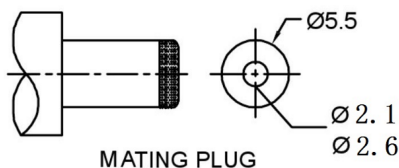
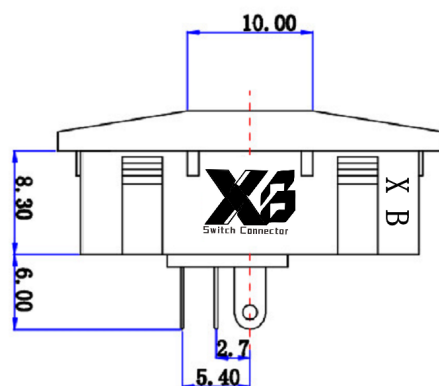
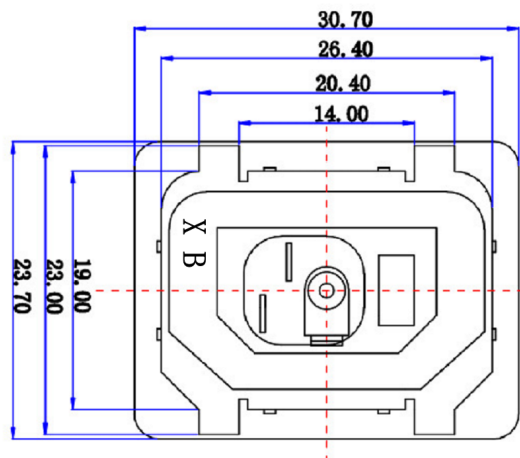


CAD FILE:

ROHS

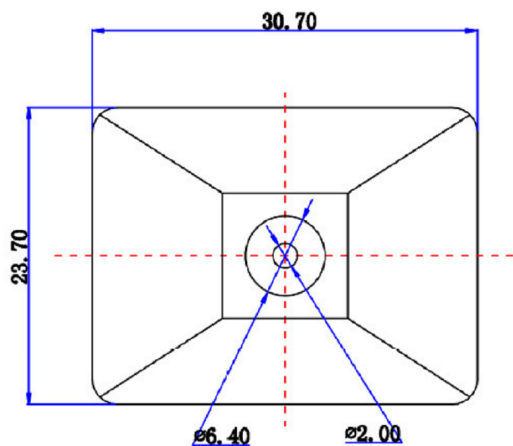

SCHEMATIC	
CENTER PIN	Ø2.0mm
	Ø2.5mm

SPECIFICATION

- 1.Rating : DC 12V 30V , 1.0A 3.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1mm$	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-106K	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-106K		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED					2012-9-25
1	KNOB	PPA	1	BLACK					
NO.	PARTS	MATERIALS	Q'TY	FINISH					
							东莞市溪榜电子有限公司		
					DONG GUAN XI BANG ELECTRONICS CO., LTD.		CHK'D	DONG. PANG	2012-9-25
							APPD.	ZENQ. CHEN	2012-9-25