

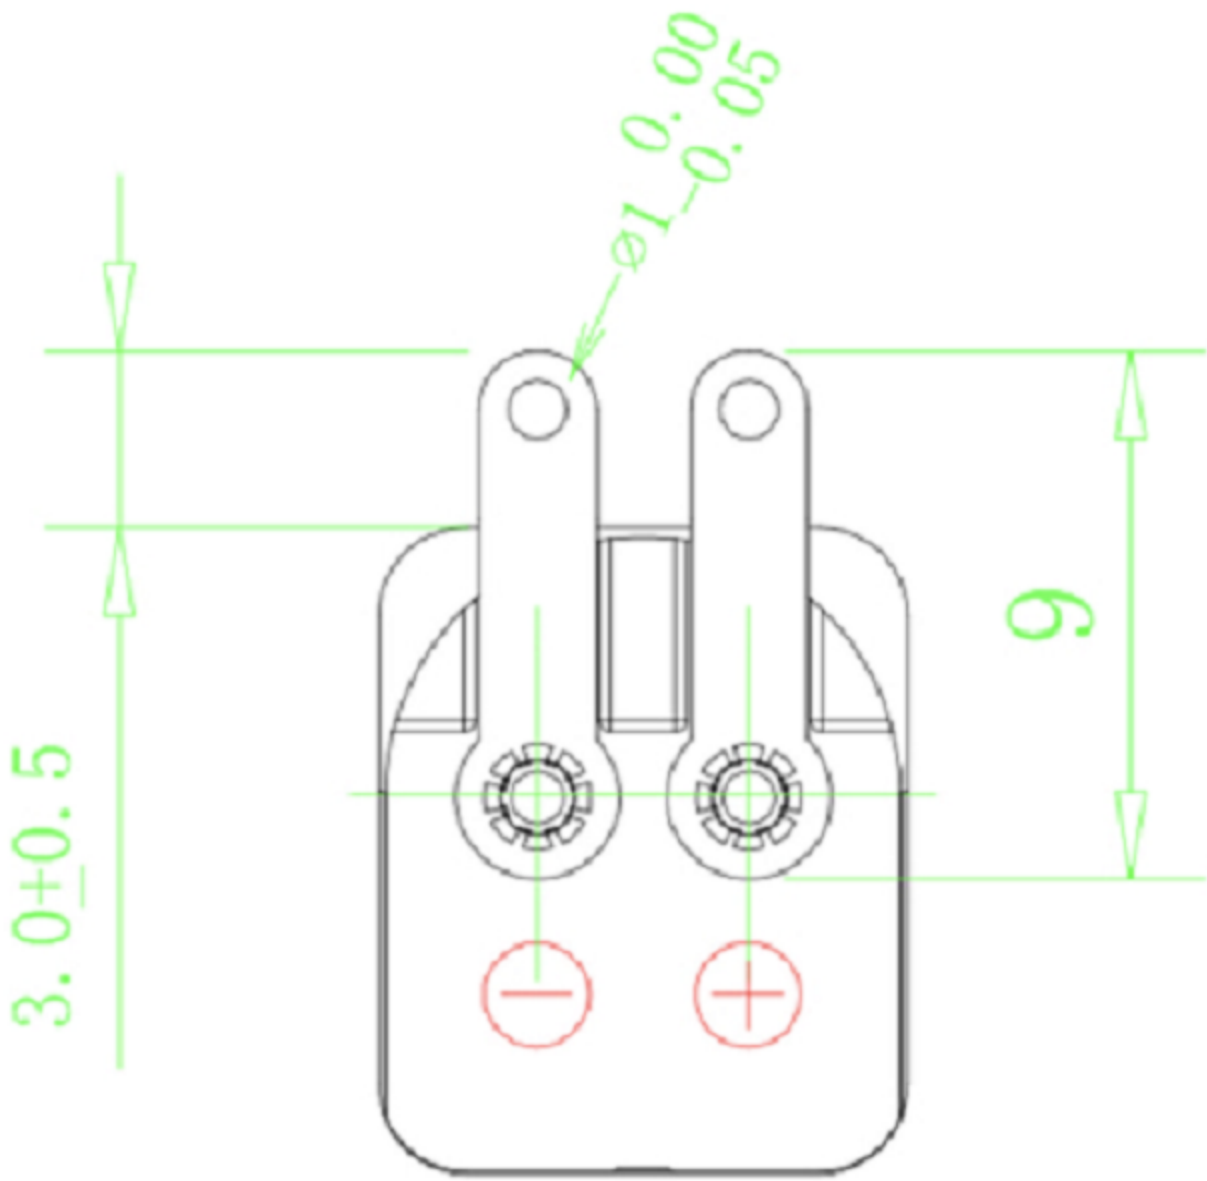


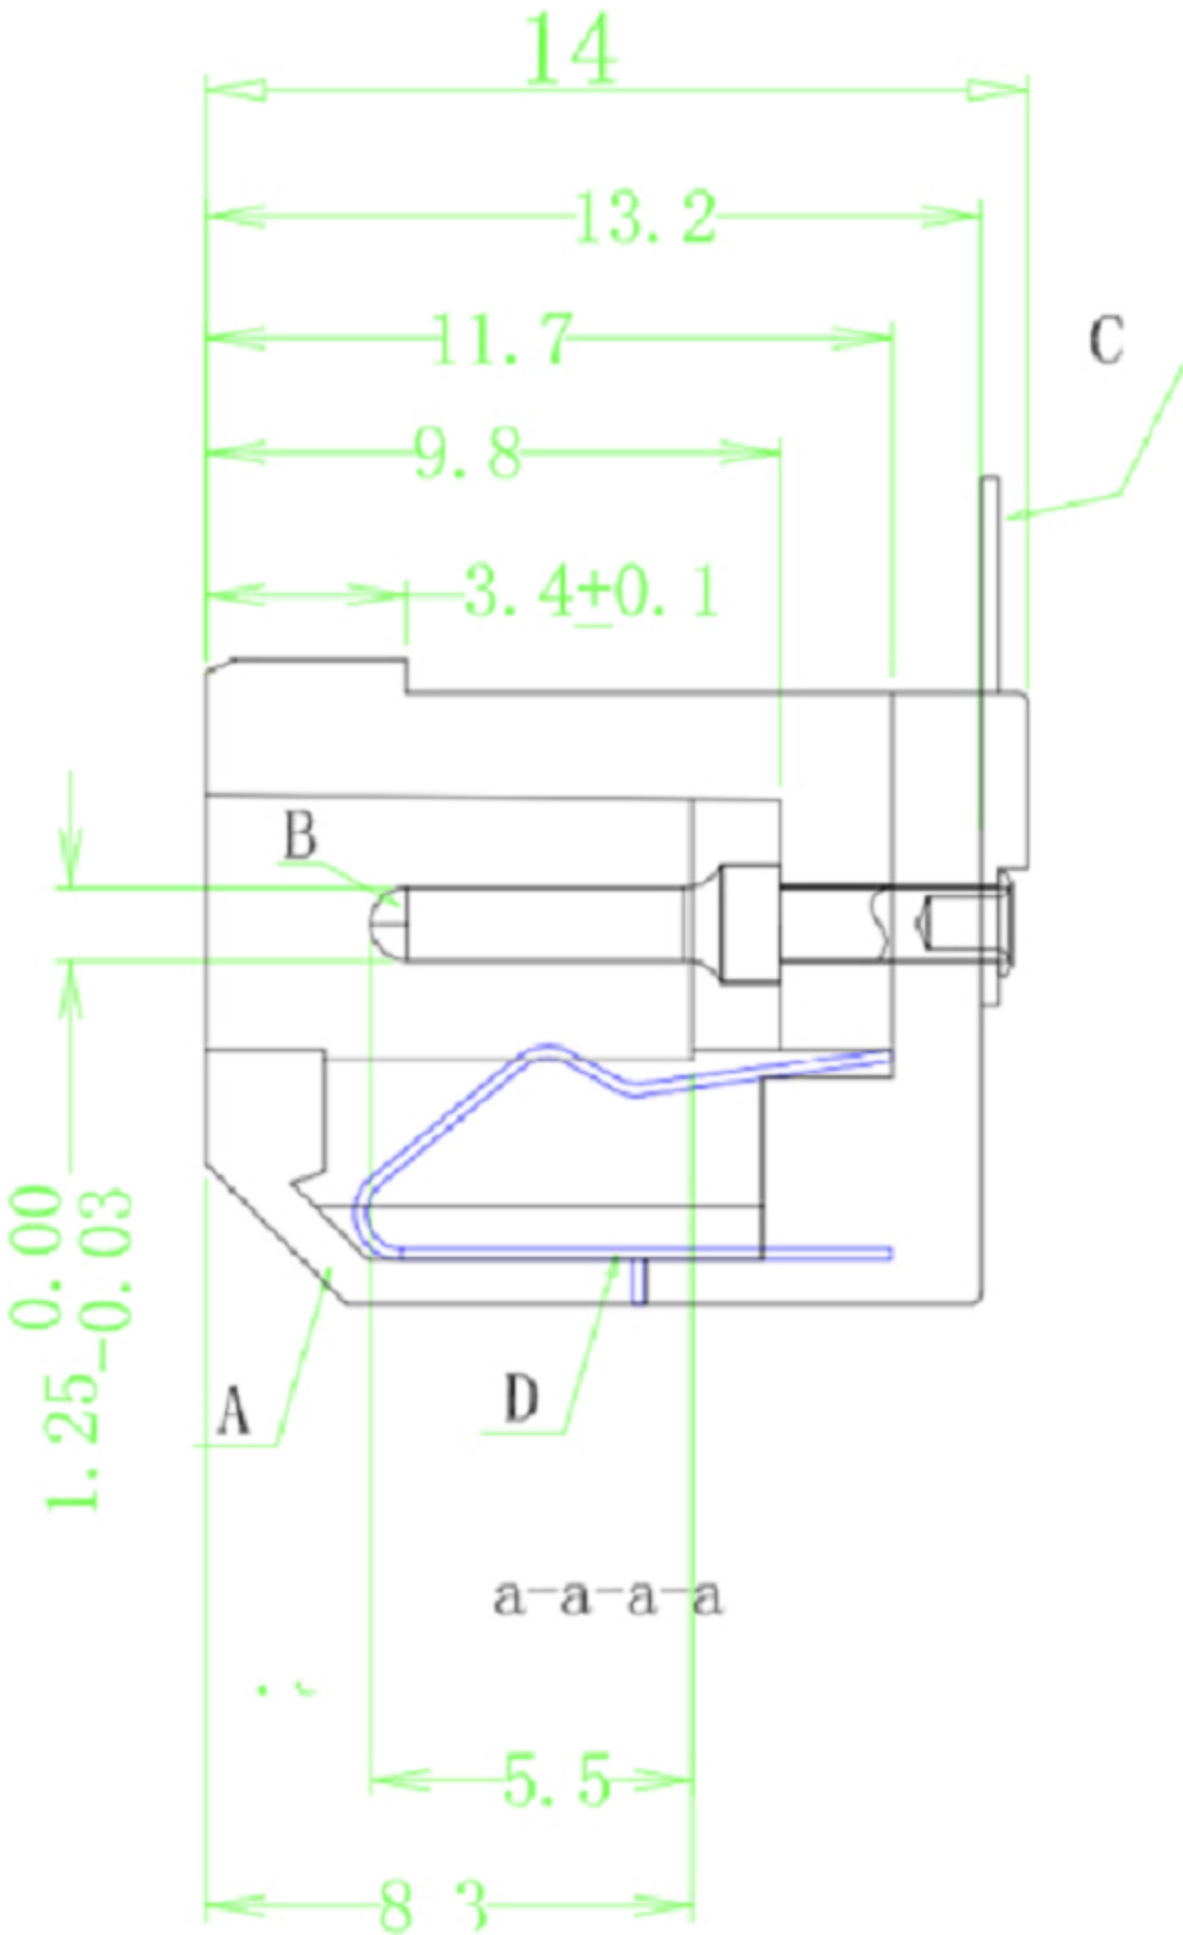

CAD FILE:

ROHS

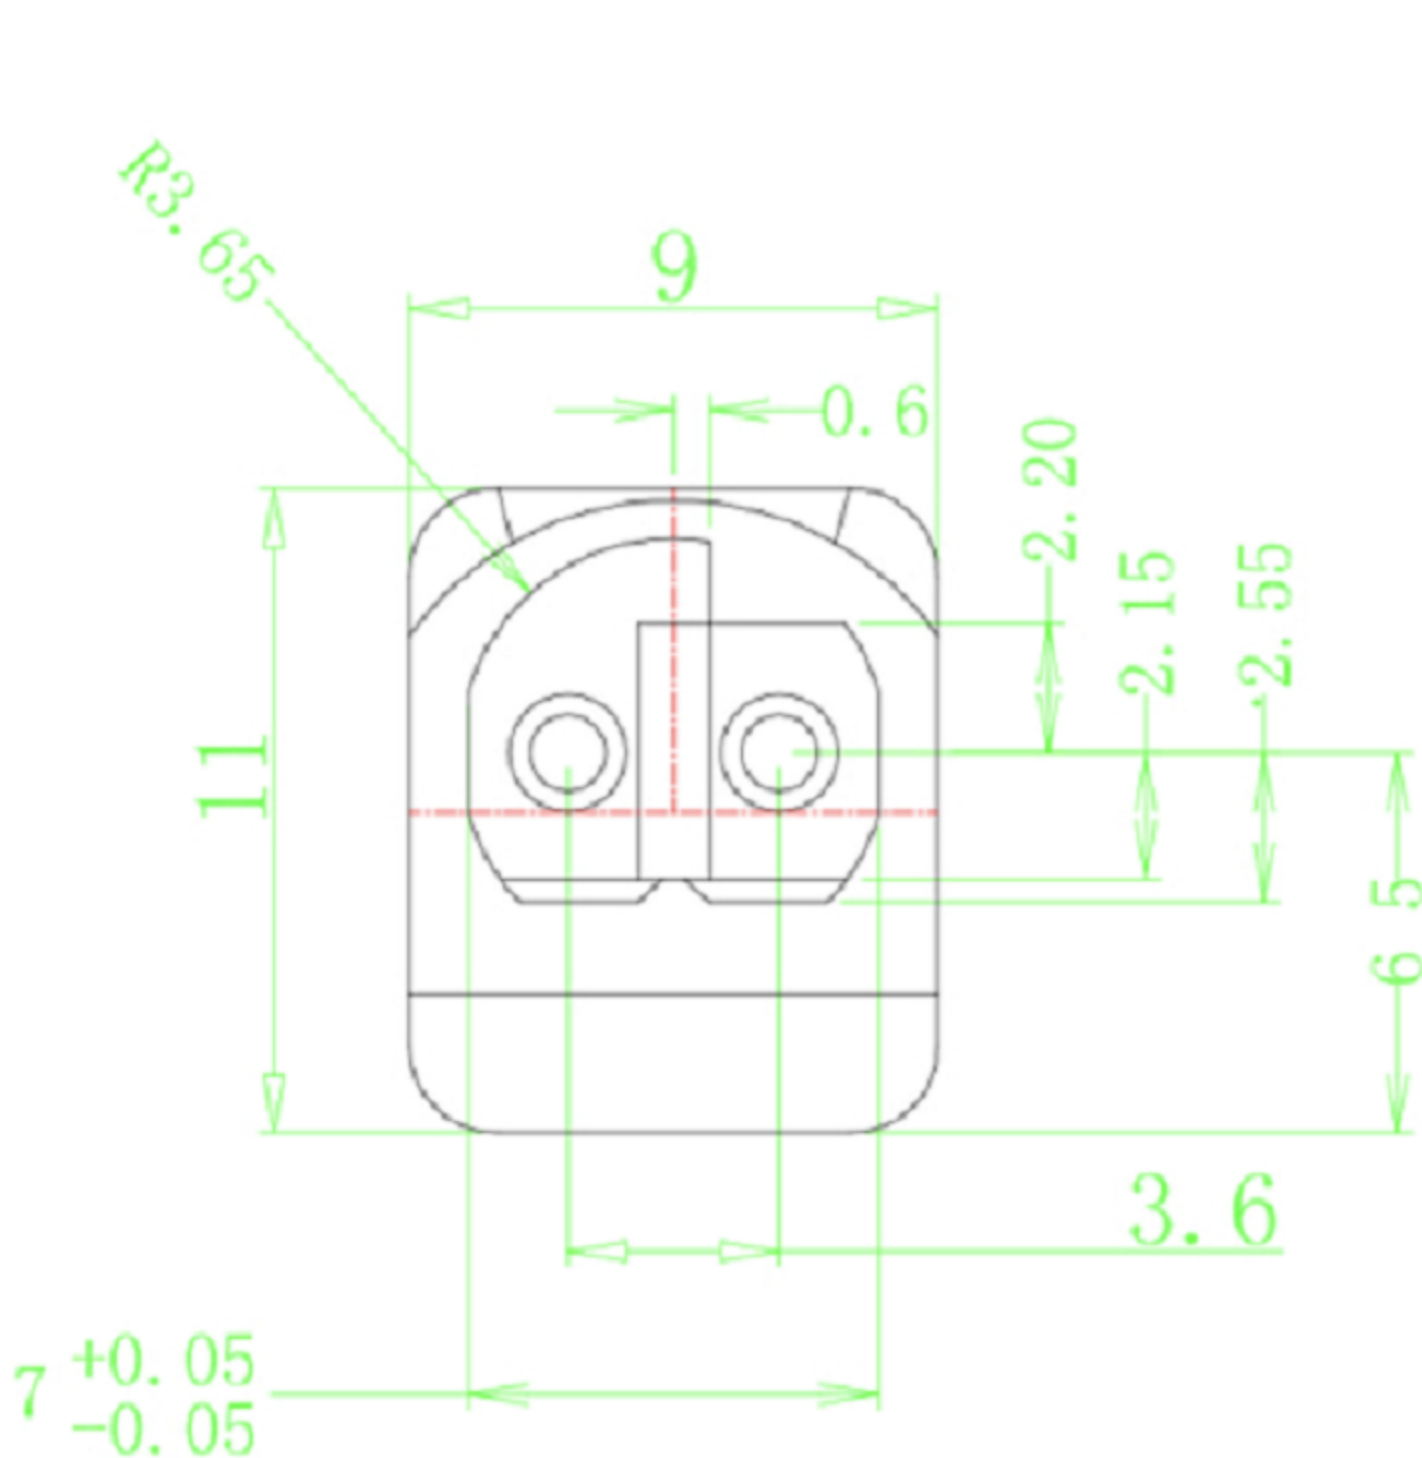

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Current Rating : Max 1.0A 3.0A , 16V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-5092	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-5092			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED					2012-9-25	
1	KNOB	PPA	1	BLACK				CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	ZENQ. CHEN	2012-9-25