
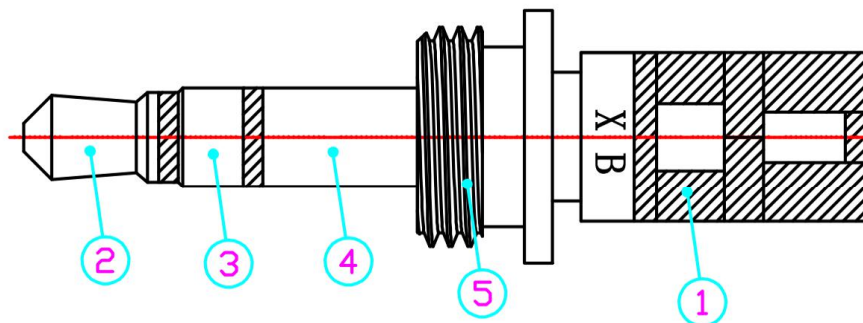
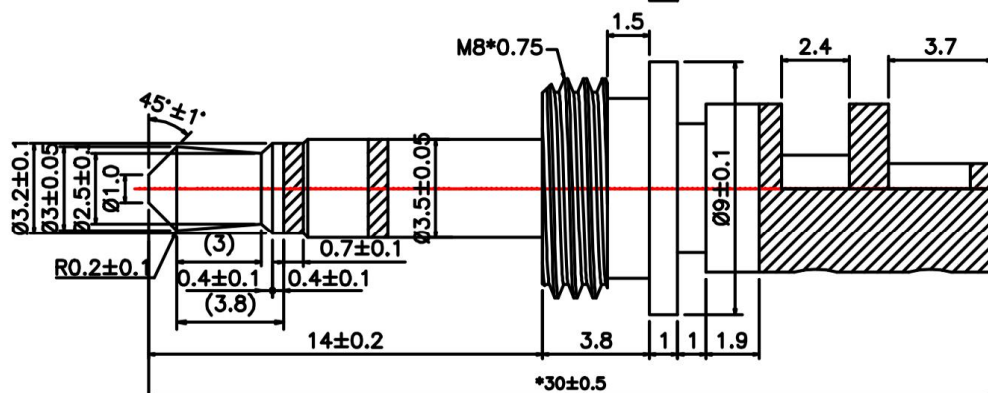
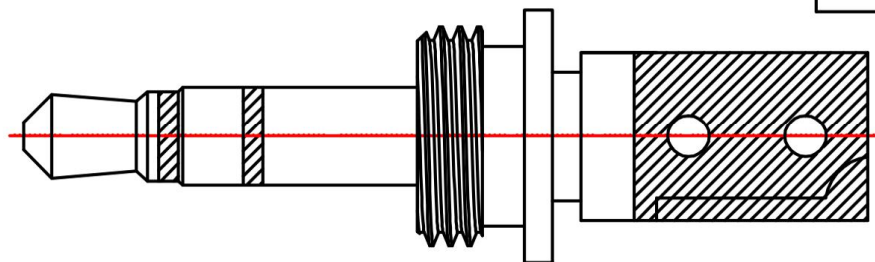



版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	修 名 SIGN	日 期 DATE
V1.0		新版制定		贺龙飞	20190402



Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3—3kgf.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
			6							
比例 Scale	5:1	××,±0.3	5	9*7.7*M8管	C3604	Ni 80u"/Au0.8-1.2u"	贺龙飞	赖海杰	龙柳婷	规格 DESCRIPTION: AUDIO PLUG Ø3.5*Ø9.0*30 品名 P/N: P35390Y300G 图号 DRAWN NO: CP-05-0269
视图 Third angle projection			4	3.5*9.5三极管	C3604	Ni 80u"/Au0.8-1.2u"				
			3	3.5*19.4*2.4拉神管	C2680	Ni 80u"/Au0.8-1.2u"				
	××,±0.1	2	3.18*29.2*1.1*1.8R头	C3604	Ni 80u"/Au0.8-1.2u"	贺龙飞	赖海杰	龙柳婷	规格 DESCRIPTION: AUDIO PLUG Ø3.5*Ø9.0*30 品名 P/N: P35390Y300G 图号 DRAWN NO: CP-05-0269	
		1	PLASTIC	POM	BLACK					
			××,±0.05	NO.	PART					MATERIAL