
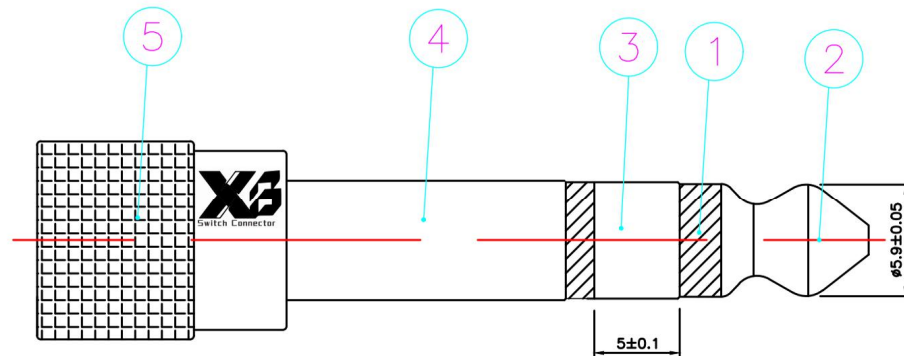
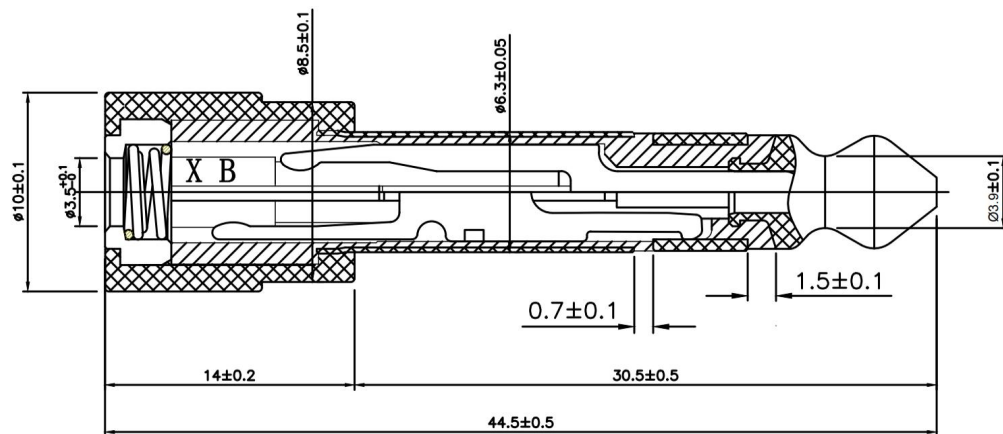



版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		贺龙飞	20211120





6. Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
			6								
比例 Scale	5:1	xx.:±0.3	5	螺 丝	C3604	Ni 2-5um/Au1.5u"	贺龙飞	赖海杰	龙柳婷	规 格 DESCRIPTION:	ø3.5*ø10*44.5
视 图 Third angle projection		x.x:±0.1	4	三段管	H65	Ni 2-5um/Au1.5u"				品 名 P/N:	AD633353G
			3	二段管	H65	Ni 2-5um/Au1.5u"				图 号 DRAWN NO:	CP-12-0010
		.xx:±0.05	2	正极管	C3604	Ni 2-5um/Au1.5u"					
			1	PLASTIC	ABS	BLACK					
			NO.	PART	MATERIAL	PLATING					

ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		贺龙飞	20211120

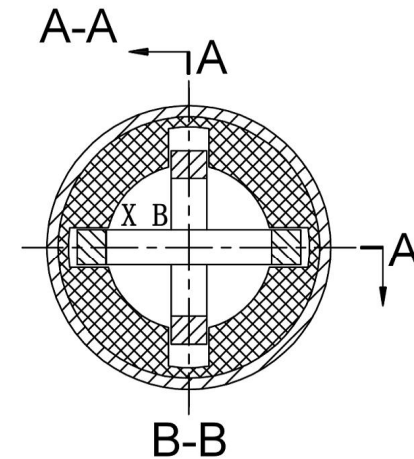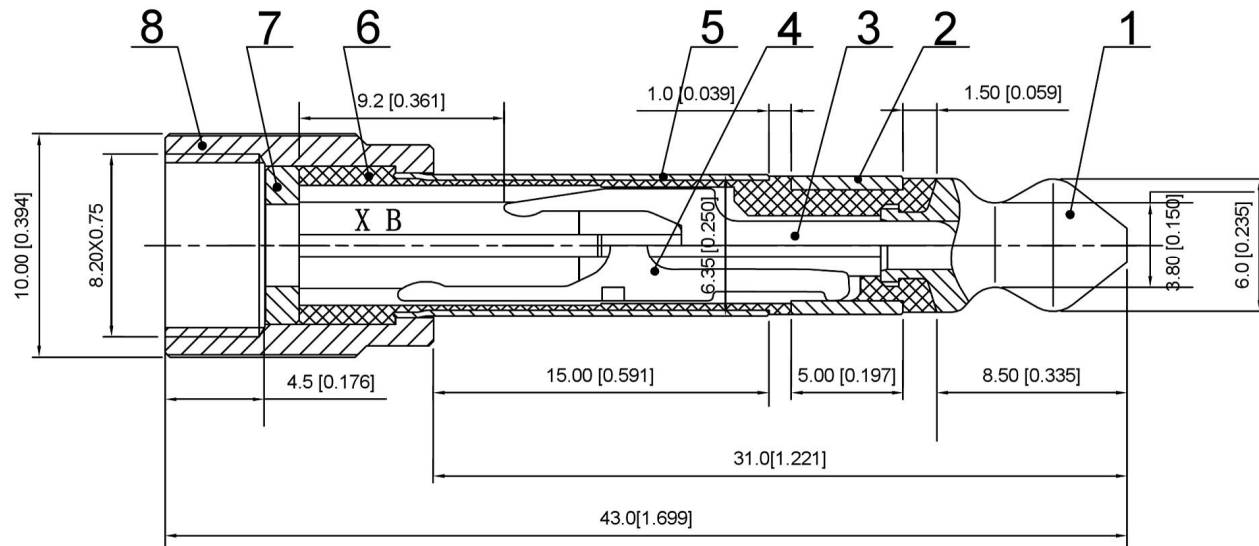

Technology Request:

1.Outlook:No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MΩ;

b:Endure voltage:AC500V at 1 minute;


c:Contact resistance:Under 30mΩ;

3.Insertion force & withdrawal force:0.3—3kgf.

4.Salt spray test:48H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
			6								
比例 Scale	5:1	xx.:±0.3	5	数量	C3604	Ni 2-5um/Au1.5u"	贺龙飞	赖海杰	龙柳婷	规格 DESCRIPTION:	ø3.5*ø10*44.5
视图 Third angle projection		x.x:±0.1	4	三段管	H65	Ni 2-5um/Au1.5u"				品名 P/N:	AD633353G
			3	二段管	H65	Ni 2-5um/Au1.5u"					
			2	正极管	C3604	Ni 2-5um/Au1.5u"					
		.xx:±0.05	1	PLASTIC	ABS	BLACK				图号 DRAWN NO:	CP-12-0010
			NO.	PART	MATERIAL	PLATING					

规格	DESCRIPTION:	ø3.5*ø10*44.5
品名	P/N:	AD633353G
图号	DRAWN NO:	CP-12-0010