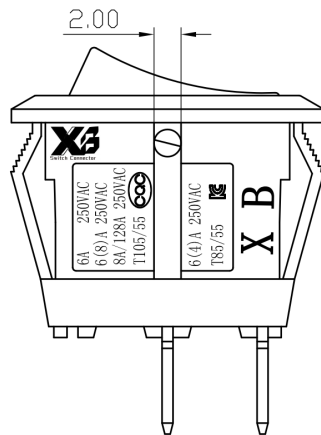
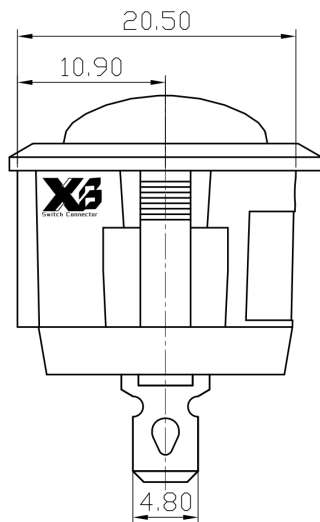
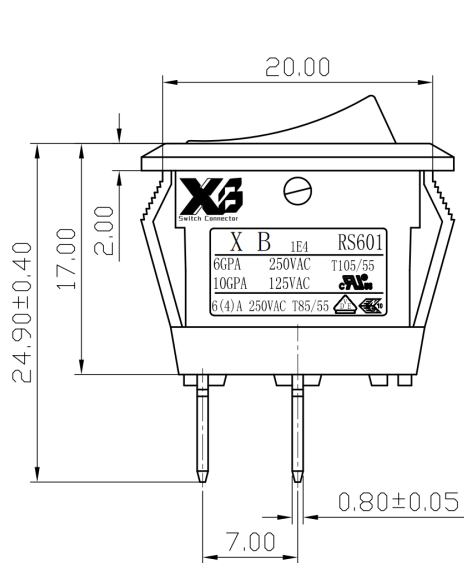


PANEL CUT-OUT		
Z	X	Y
0.80~1.50	19.90~20.10	19.3~19.5

NOTES:

1. Rating:

CQC 10A 250V AC T105/55

6(8)A 250VAC

8A/128A 250VAC

cUL 13(7)A 250V AC / 16GPA 125V AC T105/55

VDE ENEC 6(4)A 250V AC T85/55

KC 6(4)A 250V AC T85/55

TUV 10A 250V AC T125/55

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: ≥80N



4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

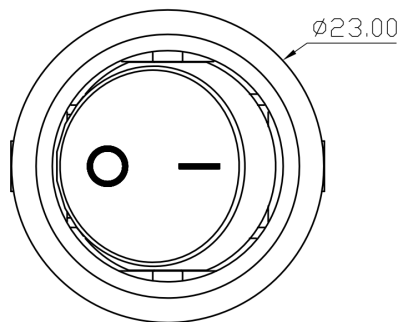

7	基座	1	环保阻燃PA66		
6	弯端	1	黄铜带 +复合银触点	镀锡	
5	中端	1	黄铜带	镀锡	
4	接触桥	1	黄铜带+铜触点	镀银	
3	套管	1	拉伸钢	镀镍	
2	弹簧	1	弹簧钢丝	回火	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

A4				普通公差:		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单位	mm	投影		品名	跷板开关	比例	Free
A1				ABOVE 5 TO 30	±0.30	绘图	高鹏	核 对	贺龙飞	型 号	RS601		
				ABOVE 30	±0.50	日期		核 准		图 号			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	2023. 10. 16	核准	路建宏	图号	RS601C-1010011BB-4A		