

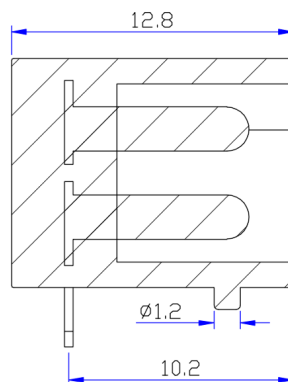


ROHS



T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-sided view)



SCHEMATIC	 2/4  3/5
CENTER PIN	Ø2.0mm
	Ø2.5mm

SPECIFICATION

- 1.Rating : DC 12V 30V, 30A 50A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

8				TOLERANCE UNLESS SPECIFIED					
7									
6				WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-0074A	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-0074A		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED					2012-9-25
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司		CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN	2012-9-25