




SPECIFICATION

- 1.Rating : DC 12V 30V, 30A 50A 10A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

SCHEMATIC	
CENTER PIN	ø2.0mm
	ø2.5mm

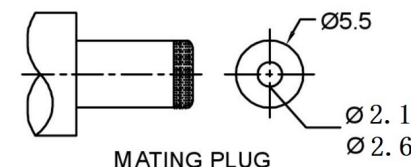

				TOLERANCE UNLESS SPECIFIED							
				WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A ISSUE	2012-9-25 DATE	初版 DESCRIPTIONS OF REVISION	ZENQ. CHEN APPD.			
8											
7											
6											
5											
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack		UNIT : mm	DRWG NO.: XB-DC-1018			
3	CASE	PPA/BASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-1018		SCALE: 5:1	DWN.	JUN. YANG	2012-9-25	
2	COVER	STEEL STRIP	1	Ni PLATED							
1	KNOB	PPA	1	BLACK	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH	 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25	