



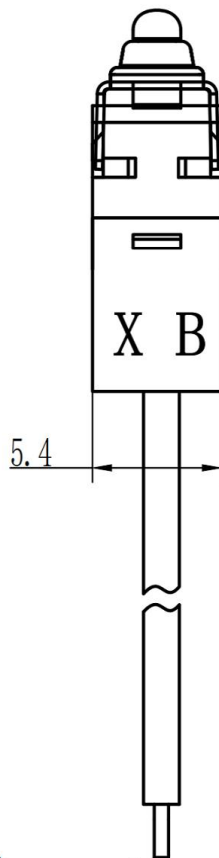


CAD FILE:

Waterproof IP67

ROHS

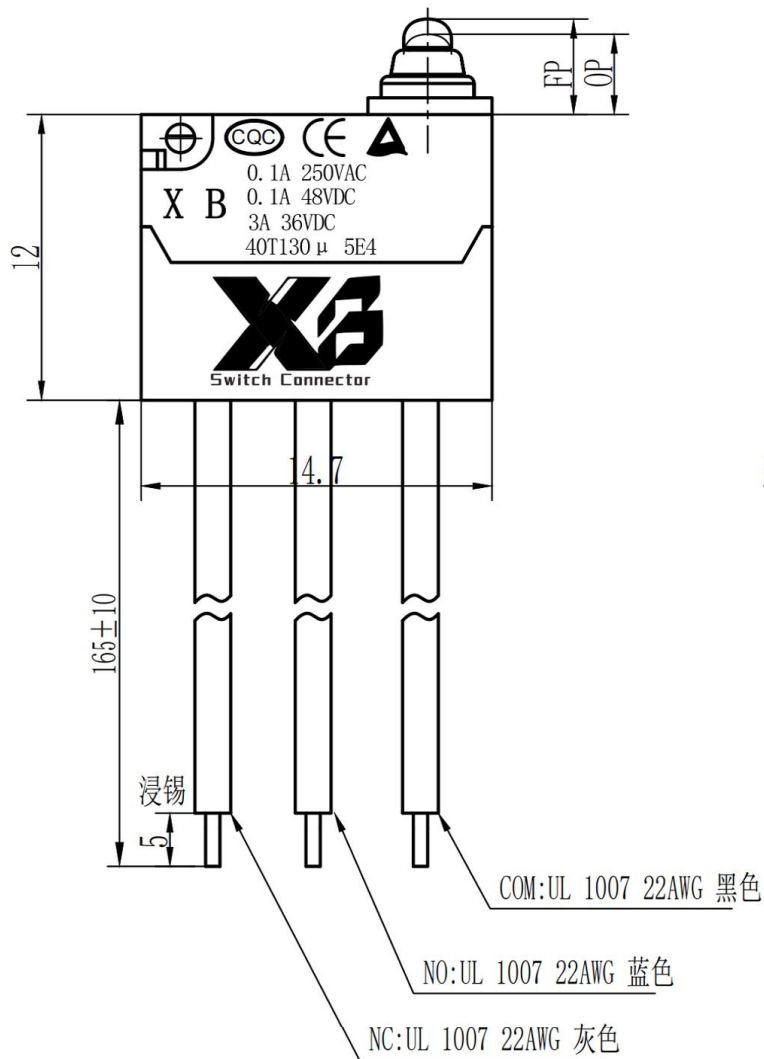

3. 电路简图



2. 认证



0.1A 125/250VAC
0.1A 48VDC
3A 12VDC
40T130 μ 1E5



0.1A 250VAC
0.1A 48VDC
3A 36VDC
40T130 μ 5E4

1. 技术参数 (Technical Parameters)

序号	主要技术参数 (Main Technical Parameters)
1	电气额定值 (Electrical Rating): 0.1A 125/250VAC; 3A/12VDC
2	环境温度 (Ambient temperature): 40T125
3	电气寿命 (Electrical lifetime): 5E4 cycles
4	动作力 (Operating force): 2.0N MAX
5	自由位置 (Free position): 4 ± 0.3 mm
6	动作位置 (Operating position): 3.5 ± 0.5 mm
7	接触电阻 (Contact Resistance): ≤ 50 m Ω (不带线)
8	耐压 (Withstand Voltage): 脚与脚 500/60S/5mA, 脚与壳 1500/60S/5mA
9	绝缘电阻 (Insulation Resistance): ≥ 100 M Ω (Test Voltage 500VDC)
10	防护等级: IP67

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-FSK-20-D232
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-FSK-20-D232			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					