



CMB-UCUAx-V-S412

HOUSING COLOR :

White : W
Black : B


Type c pin Def:

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

USB 2.0 pin Def:

1	VBUS	A7	D-	B6	D+
2	D-	A8	SBU1	B5	CC2
3	D+	A9	VBUS	B4	VBUS
4	GND	A12	GND	B1	GND

PIN	SIGNAL NAME	PIN	SIGNAL NAME	PIN	SIGNAL NAME
-----	-------------	-----	-------------	-----	-------------

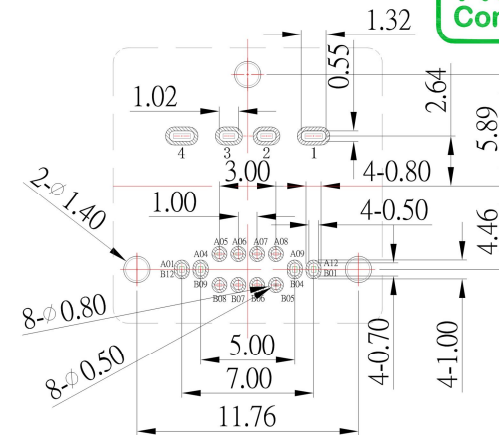

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS

Electrical:

- 1.Rating: 3.0A
- 2.Dielectric Withstand Voltage: 150V AC
- 3.Contact Resistance: 30 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:





- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: C7025
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

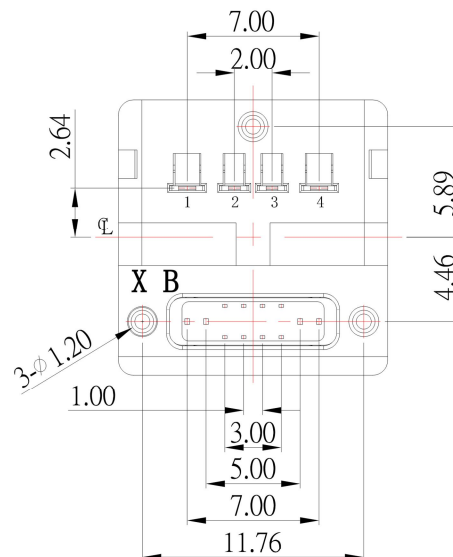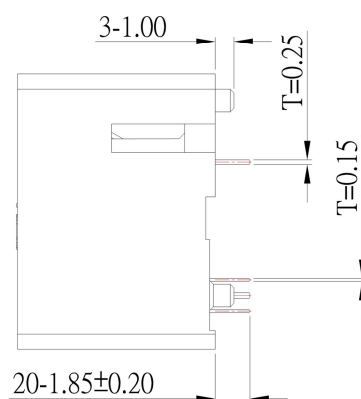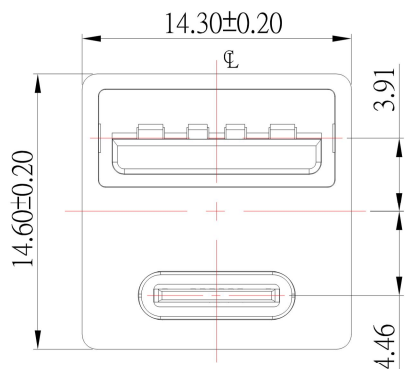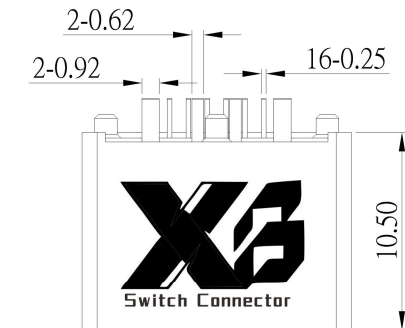

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao
DATE: 06/29/23

MAT'L		TITLE	Combo Connector
FINISH		MODLE	USB TYPE C 16P+ USB 2.0 二合一母座 H10.5
SCALE	1 : 1	DWG NO.	CMB-UCUAx-V-S412
SHEET NO.	1 of 1	PART NO.	CMB-UCUAx-V-S412

SIZE
A4
VER
R