









SBC-160VSE7-20x-S410

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

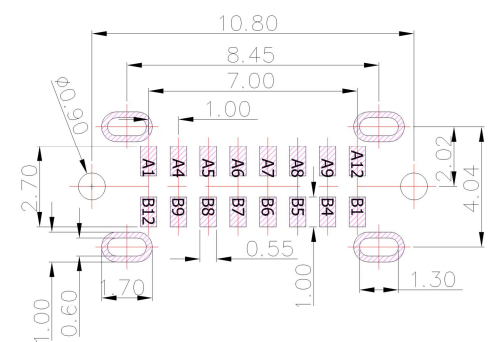

RECOMMENDED P.C.B. LAYOUT

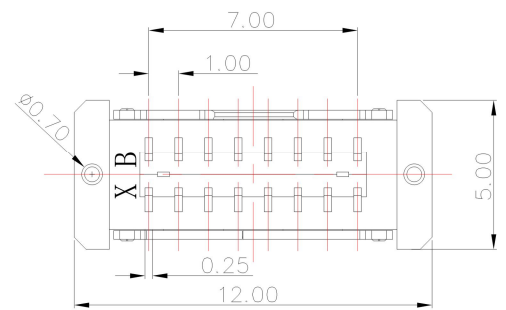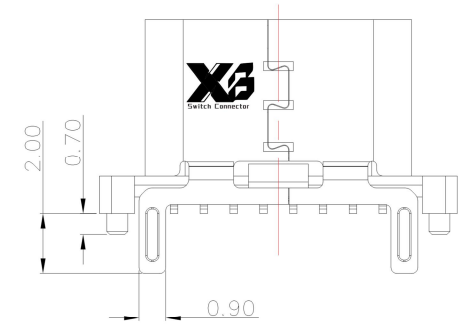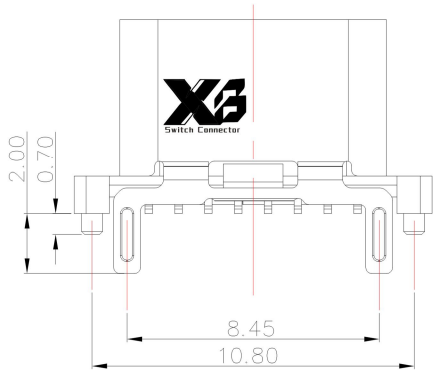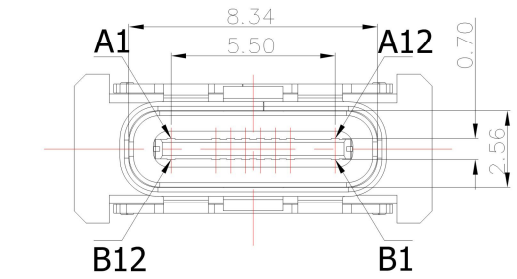

SPECIFICATIONS

Electrical:

- 1.Rating: 5.0A
- 2.Dielectric Withstand Voltage: 100V AC
- 3.Contact Resistance: 40 mΩ Max
- 4.Insulation Resistance: 100 MΩ Min

Mechanical:

- 1.Connector Mate and Unmate Force
 - 1.1 Mate force: 5~20 N
 - 1.2 Unmate force: 8~20 N

Material:

- 1.Housing: LCP
- 2.Contact: C7025
- 3.Shell: SUS
- Finish:
 - 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/30/23	FINISH	MODLE	TYPE C 16P 180 度 SMT 帶定位柱 H6.50
CHECKED BY:	DATE	SCALE	DWG NO.	SBC-160VSE7-20x-S410
Jacky Chen	03/30/23	1 : 1	PART NO.	SBC-160VSE7-20x-S410
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	03/30/23			