










MRUSB-5AB-WP18x-S410

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"




SEC: A-A

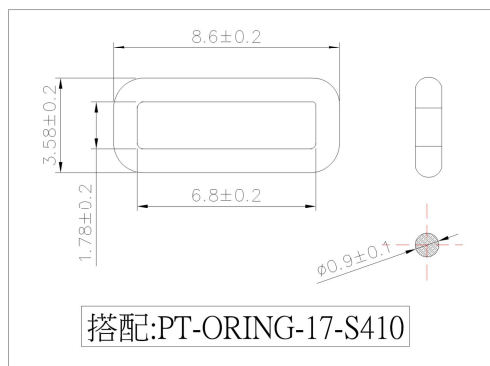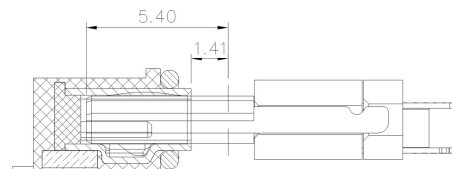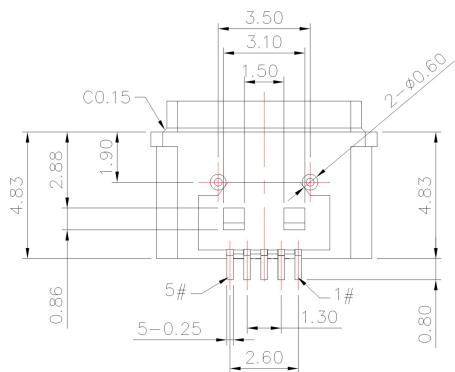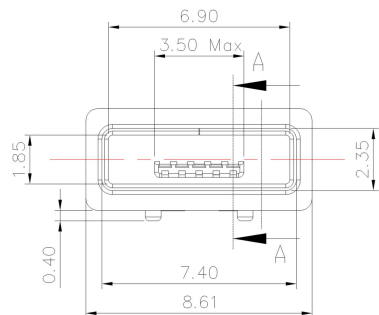

搭配:PT-ORING-17-S410

IPX7

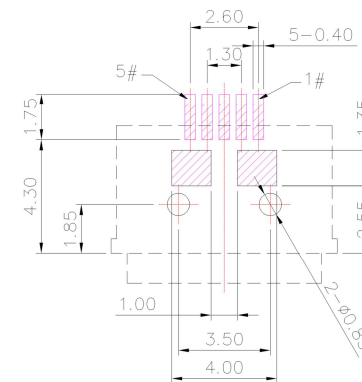

P.C.B LAYOUT MOUNTING PATTERN
TOP VIEW

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

NOTES:

MATERIAL:

1.1 HOUSING: HIGH-TEMP-PLASTIC

1.2 CONTACT: COPPER ALLOY

1.3 SHELL: COPPER ALLOY / SUS

FINISH:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

3.1 RATING: AC 30V , 1.8A(PIN1&5) , 0.5A(PIN2&3&4)

3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC

3.3 CONTACT RESISTANCE: 30 mΩ MAX.

3.4 INSULATION RESISTANCE: 100 MΩ MIN.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	06/07/21
CHECKED BY:	DATE
Jacky Chen	06/07/21
APPROVED BY:	DATE
Tony Kao	06/07/21

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5PF AB TYPE H 3.5 防水型 IPX7
SCALE	1 : 1	DWG NO.	MRUSB-5AB-WP18x-S410
SHEET NO.	1 of 2	PART NO.	MRUSB-5AB-WP18x-S410

SIZE
A4
VER
R