

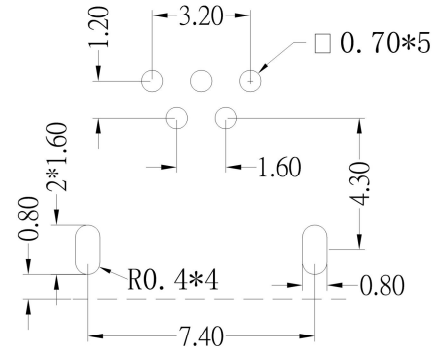
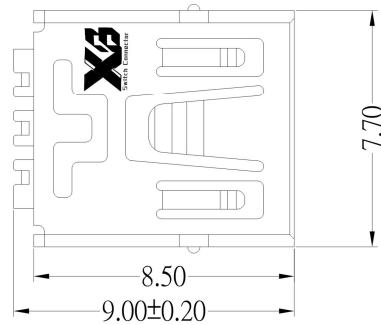
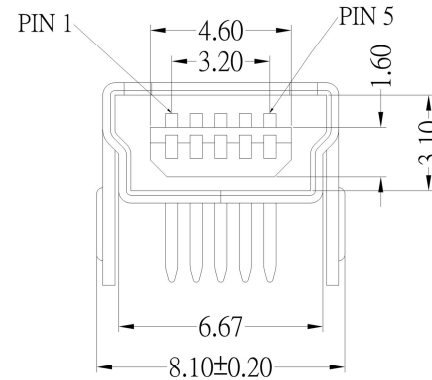


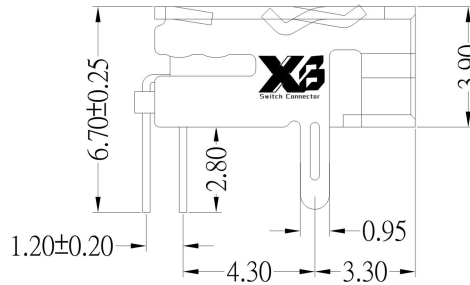

P.C.B LAYOUT MOUNTING PATTERN



SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 mΩ Max
- 4.Dielectric Withstanding Voltage: 300 V AC AT Sec Level
- 5.Insulation Resistance: 100 MΩ Min

Material:

- 1.Housing:LCP , Black
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
10/12/20
DATE
10/12/20
DATE
10/12/20

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
MINI USB 5BF DIP 兩腳
1 : 1
1 of 1

MUSB-5B-DM0F-S175
MUSB-5B-DM0F-S175

SIZE
A4
VER
R6

ITEM NO.	DESCRIPTION	DRAWN	DATE
5	新增尺寸公差	Jack	101220
4	更新樣式	Jack	032519
3	更新尺寸	Jack	102017
2	更新Contact材質及鍍層	Jack	061914
1	更新鍍層	Jack	102813