

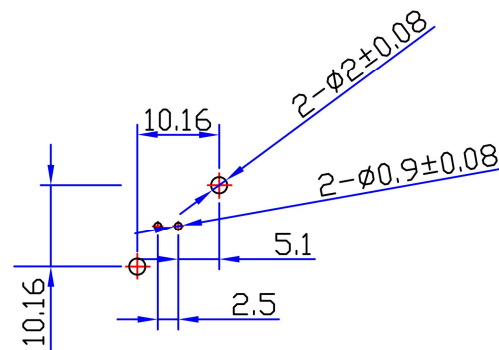
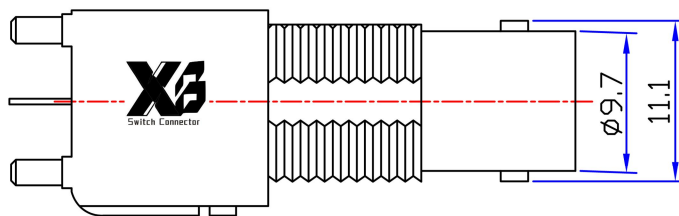

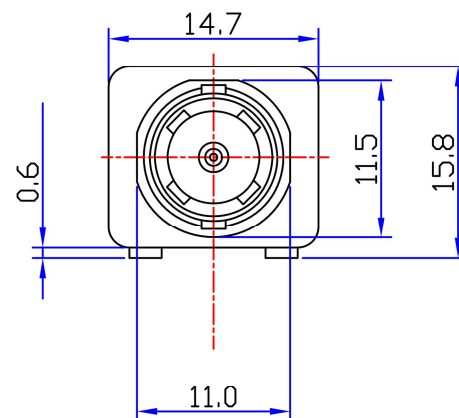


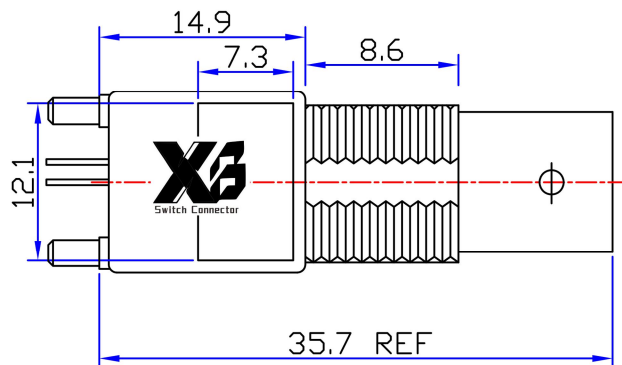

Product NO. XB-801-0037

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2012/11/02	John kine

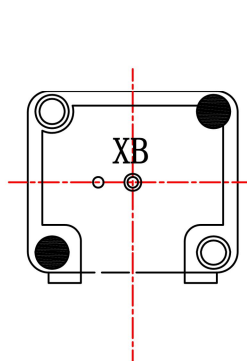

PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

Specifications

Impedance:75 Ohms

Frequency Range:DC~3G

VSWR:1.3MAX

Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55℃ TO +155℃

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards

NOTE:

E	GASKET	TE	NICKEL	1
D	NUT	BRASS	NICKEL	1
C	INSULATOR	POM	NONE	1
B	CONTACT PLATINC	BRASS	GOLD	1
A	BODY	ZINC	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISHED	QTY


DRAWN
Zelin. Zhang
12/04/2012

APPROVALS
John Kine

Tolerance

0-6 ±0.15
6-30 ±0.20
30-120 ±0.5
Angular ±2°

View



UNIT

MM

SCALE

1:1



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC CONNECTOR DNN

SIZE A Product NO. XB-801-0037

DateTime
2012/11/02

CAD FILE
D/company drawings/BD

SHEET: 1 OF 1