


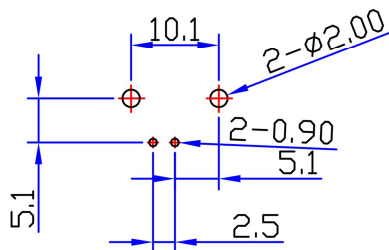

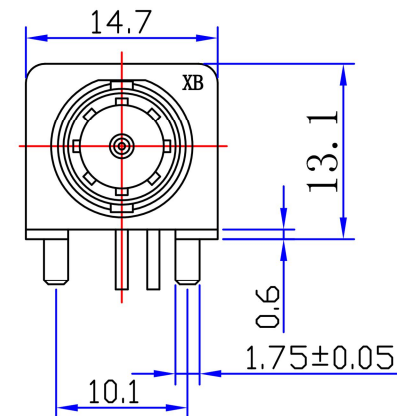


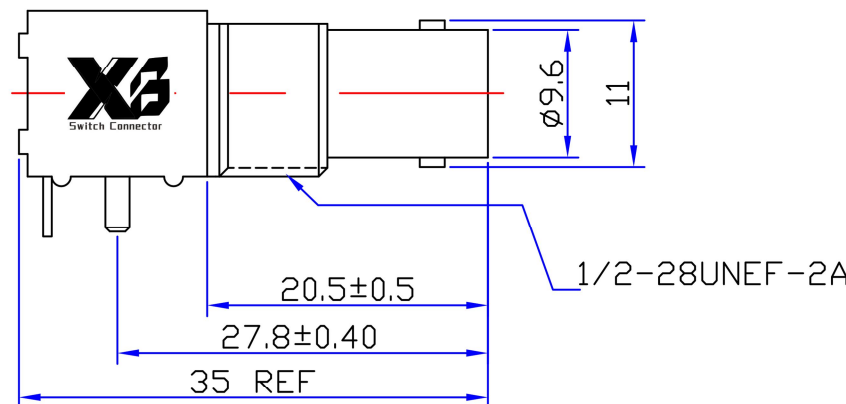


Product NO. XB-801-0043

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2010/08/19	John kine

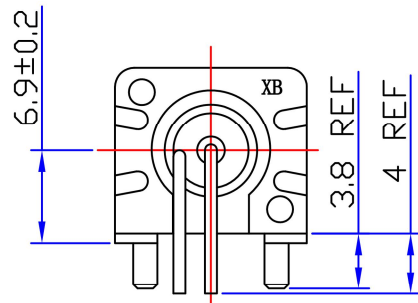

LOCK WASHER



1/2-28UNEF-2B
CLAMP NUT

Specification:

Impedance: 75 Ohms

VSWR: 1.3MAX

Frequency range: DC~4G

Working Voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95% (40°C ±2°C)

Drawings products are in line with ROHS standards.

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS: 5.5MM
RECOMENDED MOUNTING TORQUE:
12 INCH-POUNDS MAX

1	Body	Zinc	NI:80-120u"
2	Center contact	Brass	AU:1u"
3	Lead	Iron	AU:1u"
4	Fixed footrest	Iron	NI:80-120u"
5	Insulator	POM	White
6	Fixed mount	PBT	White
7	Washer	IRON	NI:80-120u"
8	Hex nut	Brass	NI:80-120u"
9			
10			
NO	Component Number	Material	Finish

NOTE:	
DRAWN	Zelin. Zhang
CHECKED	
APPROVALS	

Tolerance	X.	±0.15
	X. X	±0.10
	X. XX	±0.05
	Angular	±5°
View		
UNIT	MM	
SCALE	1:1	

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC Jack 90° PCB Mount

SIZE A	Product NO. XB 801 0043	REV A
DateTime 2012/04/13	CAD FILE D/company drawings/BD	SHEET: 1 OF 1