


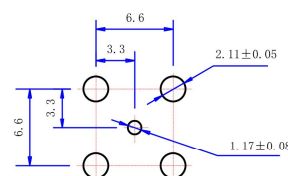


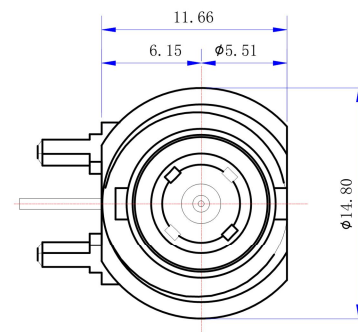


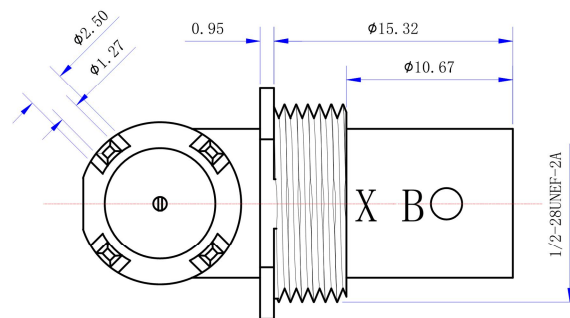

Product NO.		XB-801-0083		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2012/11/02	John kine

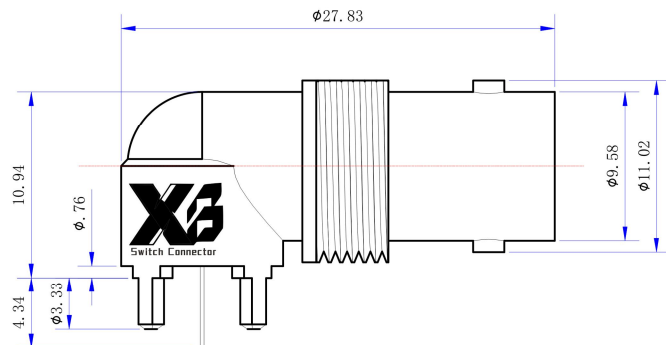

PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

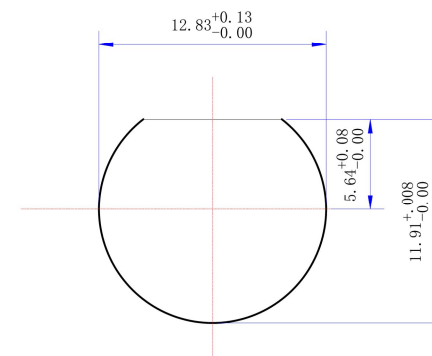

Specifications

Impedance:50 Ohms

Frequency Range:DC~3G

VSWR:1.3MAX

Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55℃ T0 +155℃

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards

NOTE:


Tolerance

0-6 ±0.15
6-30 ±0.20
30-120 ±0.5
Angular ±2°

DRAWN
Zelin. Zhang

2012/11/
10

View



UNIT

MM

APPROVALS
John

12/04.2012

SCALE

1:1



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name:

BNC CONNECTOR DNN

SIZE
A

Product NO.

XB-801-0083

REV
B

DateTime
2012/11/02

CAD FILE

D/company drawings/BD

SHEET: 1 OF 1

3	BODY	ZINC	NICKEL	1
2	INSULATOR	POM	WHITE	1
1	PIN	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

Kine

D

E

F

G