
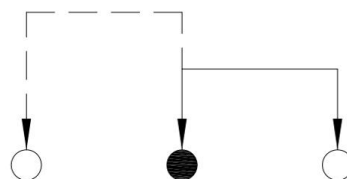
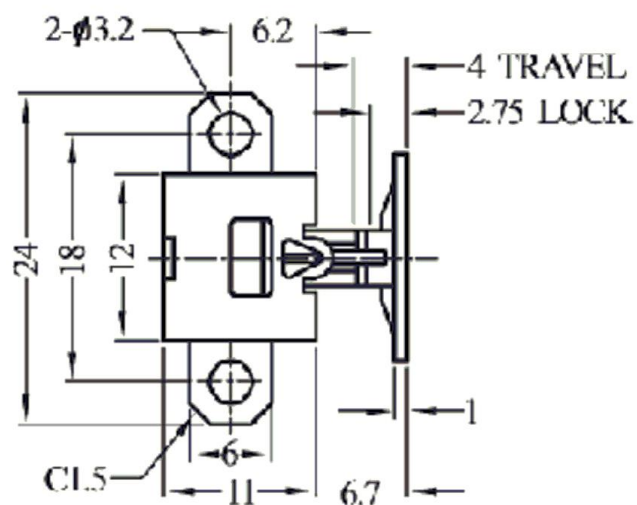
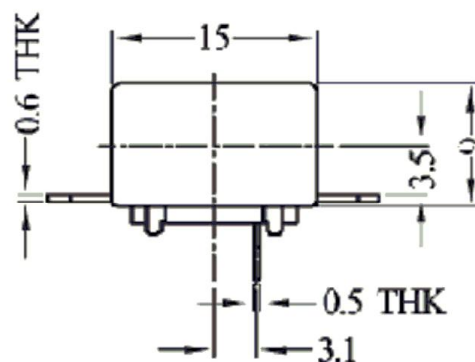


CAD FILE:

ROHS

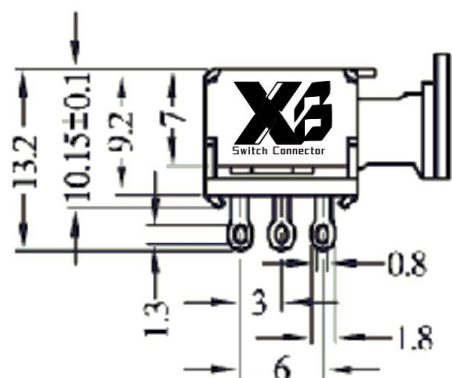

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

- 1.Rating : DC50V 0.3A
- 2.Circuit : 1P2T
- 3.Timing : Non-Shorting
- 4.Operating force : 250 ± 100 gf
- 5.Life test : 10,000 cycles
- 6.Operating Mode : Self-Lock

9	Contact Clip	2	PBS	Ag-Plating
8	Cam Stick	1	PBS	Natural
7	Terminal	6	Brass	Ag-Plating
6	Base	1	Phenolic Resin	Natural
5	Frame	1	Stainless Steel	Ni-Plating
4	Spring Plate	1	PBS	Natural
3	Spring	1	Stainless Steel	Ni-Plating
2	Block	1	Stainless Steel	Ni-Plating
1	Knob	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Push Switch		UNIT : mm	DRWG NO.: XB-PS-12F01D	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PS-12F01D		SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司		CHK'D		2012-9-25
1	KNOB	PPA	1	BLACK			APPD.		ZENQ. CHEN
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.		2012-9-25		