

A B C D E F G H I J

1

2


3

4








5

6

7

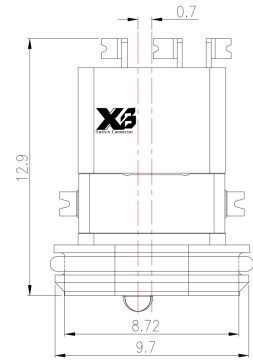


CASE INTEGRATION CONDITION

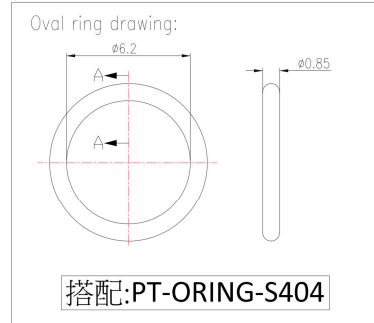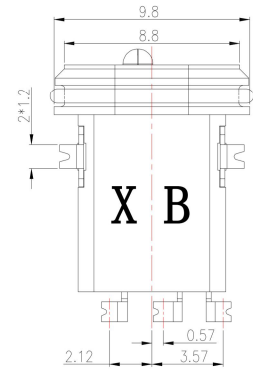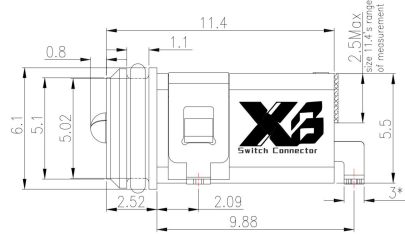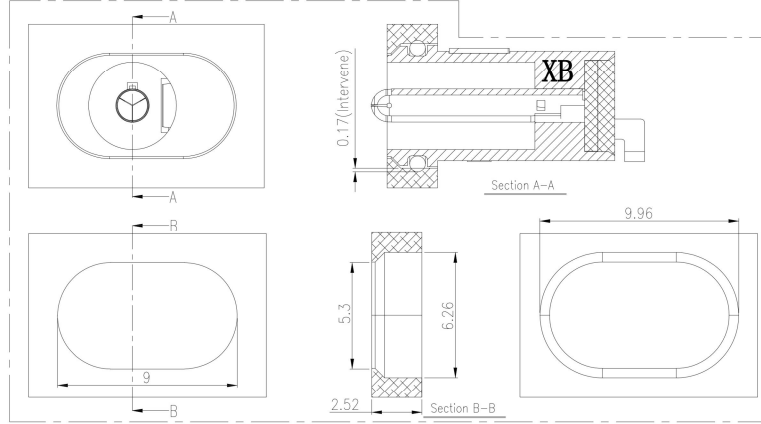

搭配:PT-ORING-S404


IPX8

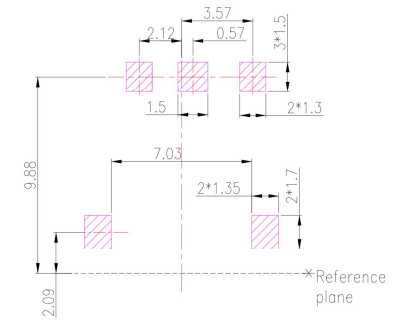

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V , 1.0A
- 2.Contact resistance : $\leq 30m\Omega$
- 3.Insulation resistance : $\geq 100M\Omega$
- 4.Withstand voltage : 300VAC
- 5.Insertion and extraction force : 5-25N
- 6.life test : 5,000 cycles



□ : TERMINAL NO. ○ : ITEM NO.

⑧	O-Ring	1		
⑦	Bond	1		
⑥	Shell	1	Brass	Ni plating
⑤	Tip Spring	1	Ti-Cu	Ni plating
④	Shunt	1	Brass	Ni plating
③	Center pin	1	Brass	Ni plating
②	Cap	1	LCP	Black
①	Housing	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/05/20
DATE: 11/05/20
DATE: 11/05/20

MAT'L
FINISH
SCALE
SHEET NO.

TITLE: JACK
MODLE: 防水 DC JACK
DWG NO.: DC-WPS67A-1.65-S404
PART NO.: DC-WPS67A-1.65-S404

SIZE: A4
VER: R

ITEM NO. DESCRIPTION DRAWN DATE

A B C D E F G H I J