




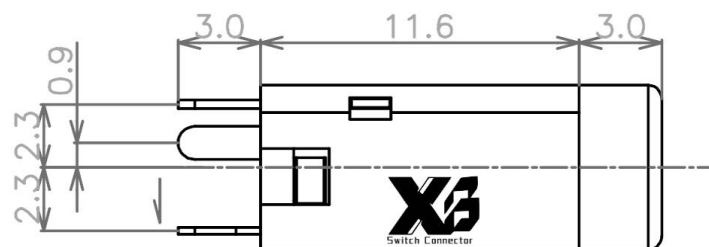




A detailed line drawing of a 5-pin DIN connector, viewed from an isometric perspective. The connector has a rectangular body with a sloped top. Five pins are visible, each labeled with a circled number: 1 points to the top-left pin, 2 to the top-right pin, 3 to the middle pin, 4 to the bottom-right pin, and 5 to the bottom-left pin. The letters 'X B' are printed on the front face of the connector.

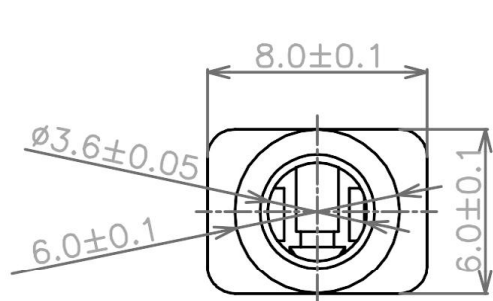

Matching Plug

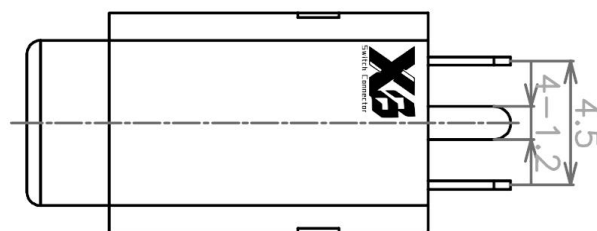

P.C.B LAYOUT TOP VIEW

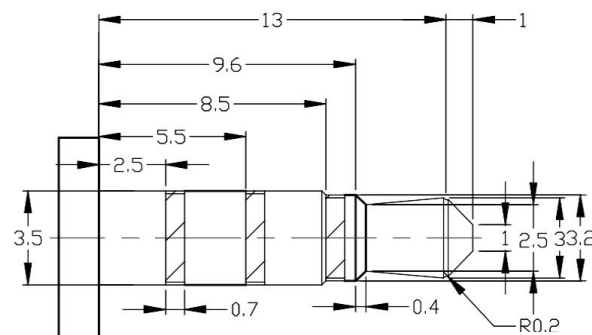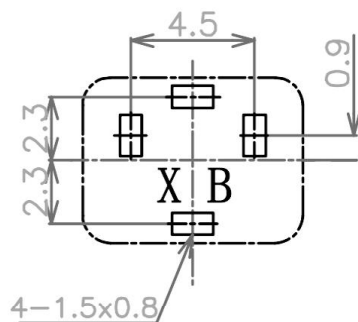

SCHEMATIC



SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

4	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
3	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
2	CONTACT FOOT	1	Phosphor Bronze	Ag-Plated
1	HOUSING	1	PBT	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

8				TOLERANCE UNLESS SPECIFIED	A	2012-9-25	初版		ZENQ. CHEN
7				WITHIN 1.5mm : ±0.1mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
6				OVER 1.5mm : ±0.2mm					
5									
4	CONTACT	SUS	1	Ag CLAD	TITLE : Audio Jack		UNIT : mm	DRWG NO.: XB-PJ-359-4P-X	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PJ-359-4P-X		SCALE: 5:1	DWN.	JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		CHK'D		DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK			APPD.		ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					