
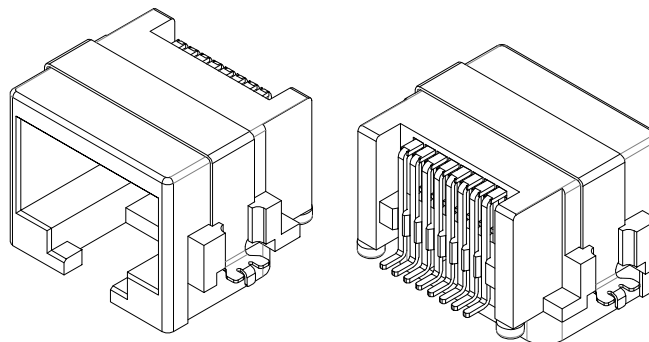


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE	LXH	2018/01/18
B	更换图框	RAINYI	2021/06/11

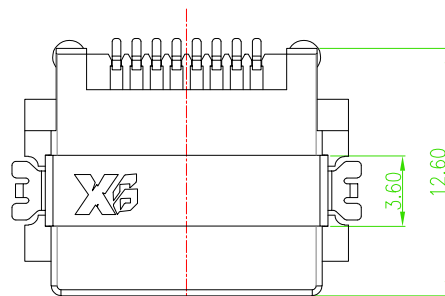

说明:

1. 材质:

胶芯:LCP,UL94V-0; COLOR; BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

1) 电压: 150V AC RMS.

2) 额定电流: 1.5A.




3) 接触电阻: 40mΩ Max.


4) 绝缘电阻: 500MΩ MIN.




5) 绝缘耐压: 1000V AC.

6) 工作温度: -40° C TO +80° C.

7) 耐久性: 500 Mating Cycles MIN.

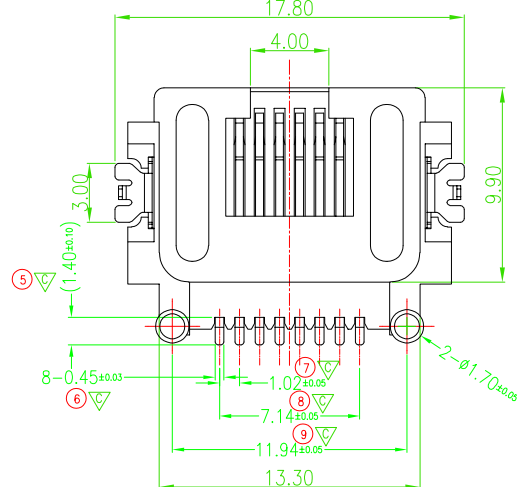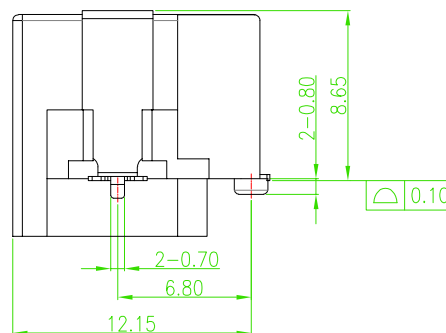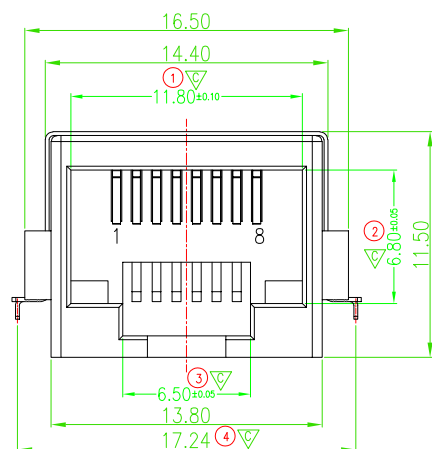


TOLERANCE UNSPECIFIED		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.	±0.30				
.0	±0.20				
.00	±0.10				
.000	±1.00°				
X.°					
ASSEMBLY DRAWING		TITLE: RJ45沉板8.6半包 SMT 成品图			
DRAWN	He. Long. Fei	SIZE: A4	UNIT: mm.	PART. NO: XB-RJ1S-N1L1-01	
DATE	2021/06/11				
CHECKED	Long. Liu. Ting	SCALE: 1:1	PROJECTION		REV.: B
DATE	2021/06/11				
APPROVED	Lai. Hai. Jie	DWG	PATH	C00-0000-0023	PATH 1/2
DATE	2021/06/11				

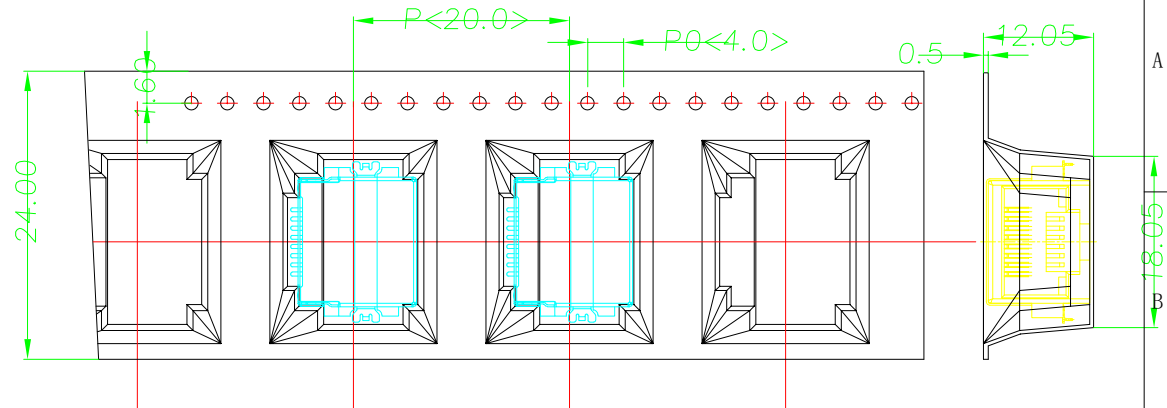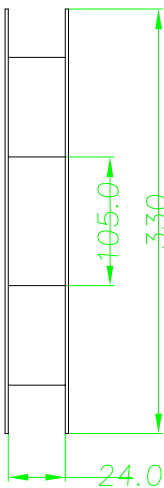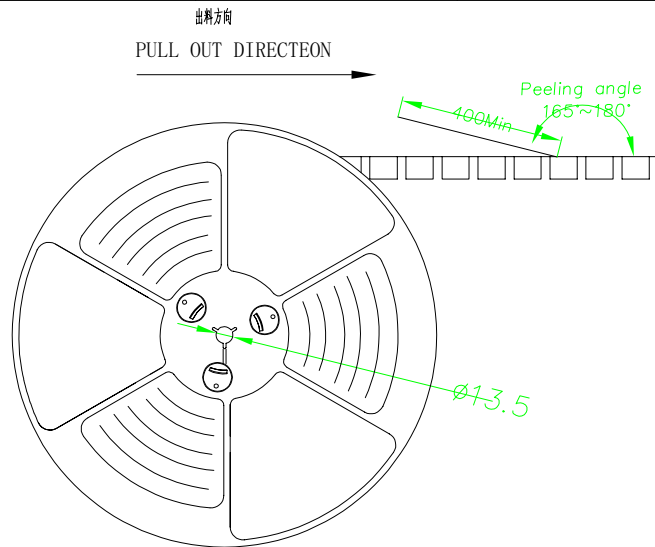

NOTES


1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

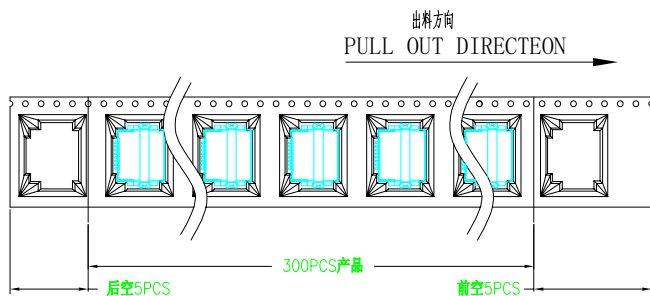

2.上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

TAPE & REEL 10 PCS


1 REEL
= 300 PCS

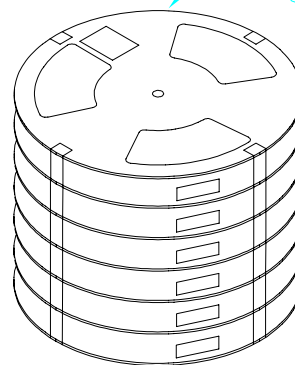

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL

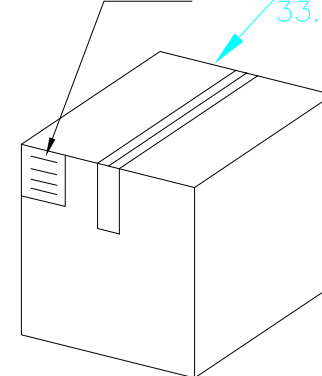

1 CARTON
= 10 REELS
= 3000 PCS

TOLERANCE UNSPECIFIED

.0 ±0.30
.00 ±0.20
.000 ±0.10
X. ° ±1.00°
ASSEMBLY DRAWING

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE: RJ45沉板8.6半包 SMT
成品包装图—载带

DRAWN
DATE He. Long. Fei
2021/06/11

SIZE: A4 UNIT: mm. PART. NO: XB-RJ1S-N1L1-01

CHECKED
DATE Long. Liu. Ting
2021/06/11

SCALE: 1:1 PROJECTION REV.: B

APPROVED
DATE Lai. Hai. Jie
2021/06/11

DWG PATH C00-0000-0023

PATH 2/2