
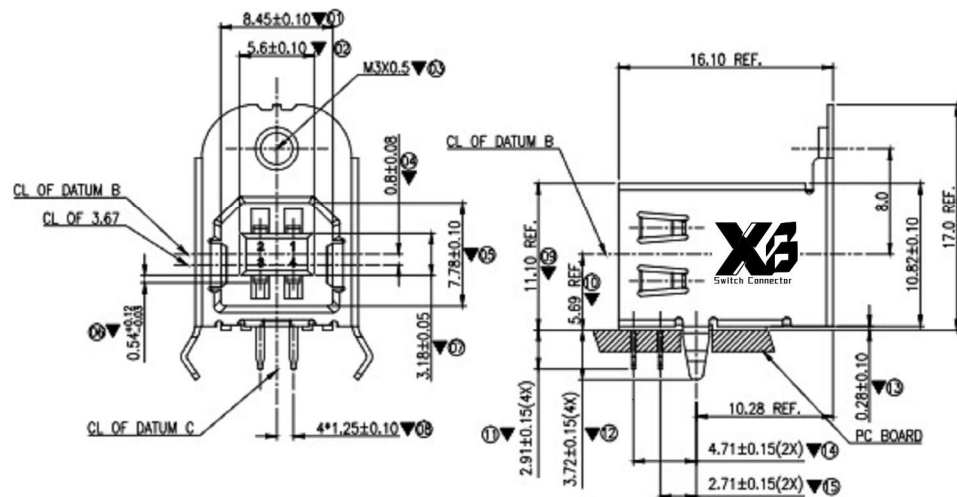


PART NUMBER INFORMATION

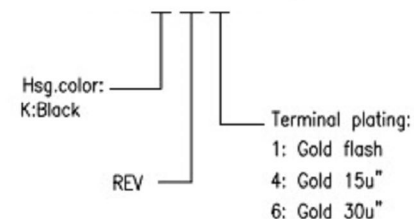

NOTE:

1.MATERIAL:

- 1.1 INSULATOR:PBT+30%GF, UL94V-0, COLOR:BLACK
- 1.2 CONTACT: C5191 T=0.25MM.
- 1.3 SHELL:C2680 T=0.4MM

2. PLATING:

- 2.1 CONTACT: 30u" MIN GOLD PLATED ON CONTACT AREA
100~200u" Min. TIN PLATED ON SOLDER TAIL
50~100u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL:100~200u" BRIGHT TIN OVER 50~150u" NICKEL.

3. CHARACTERISTICS:

- 3.1 ELECTRICAL CHARACTERISTICS;
CONTACT RESISTANCE:30mΩ MAXIMUM
CONTACT CURRENT RATING:1.5A
DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
INSULATION RESISTANCE 1000 MEGOHMS MIN
OPERATING TEMPERATURE:-20°C ~ +60°C

3.2 MECHANICAL:

- MATING FORCE: 3.57Kg.Max.
- UNMATING FORCE: 1.02Kg.Min.
4. DESIGN STANDARD ACCORDING TO USB_2.0 SPECIFICATION.
5. THE DIMENSIONS WITH"▼"MARK ARE CRITICAL AND SHOULD BE CONTROLLED BY QC.



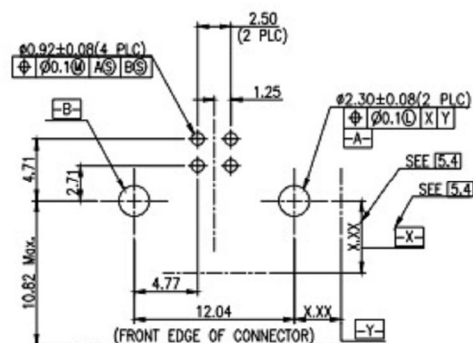


FIGURE A: PCB FOOTPRINT FOR RECEPTACLE (THROUGH-HOLE)



				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:	USB 2.0		
DWN		VIEW:	PART NO.:	XB-SUB-110E		
CHKD		UNIT: mm/in	DWG NO.:			
APPD		SIZE: A4				
				WEIGHT	SHEET	REVISION
					1/1	A0