

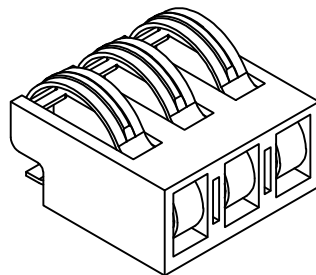

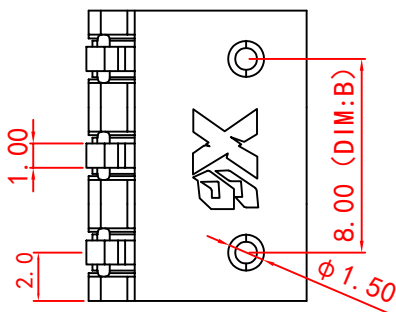
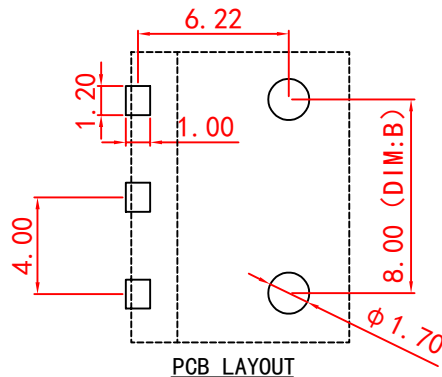



RoHS
Compliant



3D VIEW



SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 3A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ MIN, MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.

型号规格	DIM:A	DIM:B
XB-BC-TP-40H6-1P	4.00	2.80
XB-BC-TP-40H6-2P	8.00	4.00
XB-BC-TP-40H6-3P	12.00	8.00
XB-BC-TP-40H6-4P	16.00	12.00
XB-BC-TP-40H6-5P	20.00	16.00
XB-BC-TP-40H6-6P	24.00	20.00
XB-BC-TP-40H6-7P	28.00	24.00
XB-BC-TP-40H6-8P	32.00	28.00
XB-BC-TP-40H6-9P	36.00	32.00
XB-BC-TP-40H6-10P	40.00	36.00

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	PHOSPHOR BRONZE	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	CONNECTOR	DRAWING	PENG.GAO	DWG. No.	
PART NO.	XB-BC-TP-40H6系列	CHECK	JIE.HAI.LAI	REV.	A1
UNIT: mm	TOLERANCE X.X ±0.3 X.XX ±0.2 X.XXX ±0.1	ANGLE 0° ±3°	APPROVAL	FEL.LONG.HE	DATE 5-1-2024
	OTHERWISE	SCALE	3:1	PAGE	1 OF 1