

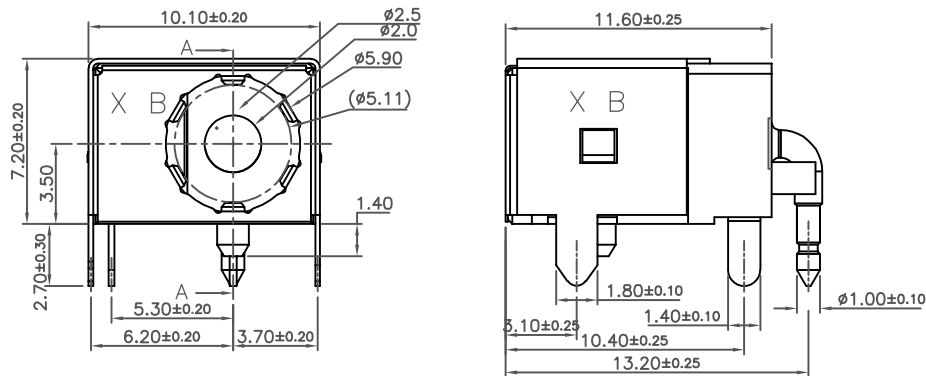
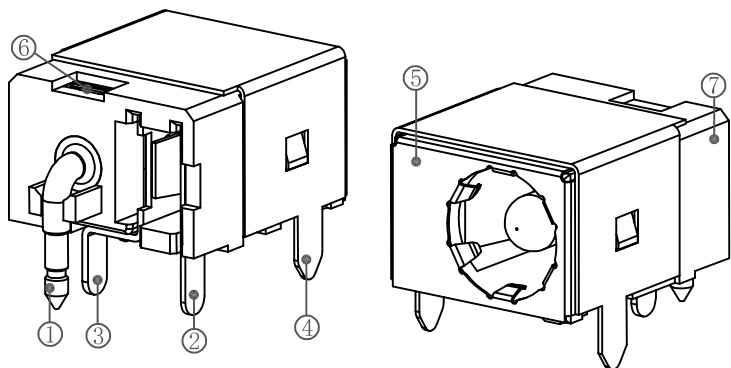
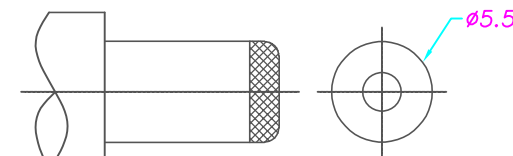



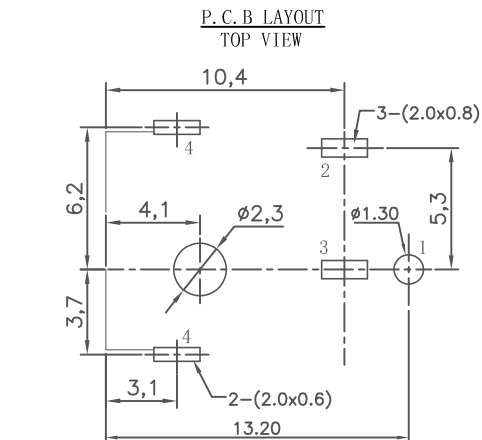

- SPECIFICATION
1. Rating : DC 24V 7.0A;
 2. Contact resistance: $\leq 0.03 \Omega$;
 3. Insulation resistance: $\geq 100M \Omega$ (DC500V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 5-25N;
 6. life test: 5,000 cycles.
 7. OPERATING TEMPERATURE: $-25^{\circ}C \sim +85^{\circ}C$



SCHEMATIC

- 1# PIN(+)
3#
2# SPRING(-)



7	HOUSING	1	PA9T BLACK	
6	STOPPER	1	SUS301	
5	COVER	1	SUS301	
4	SHELL	1	COPPER ALLOY	Ni-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	SPRING PIECE	1	COPPER ALLOY	Ag-Plating
1	PIN	1	BRASS	Ni-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	GAO. PENG 2021.4.8	PART NAME: Φ5.5xΦ2.5卧式 H=7.20 DC POWER JACK
DIM TOL	DIM TOL	CHECK:		PART NO. XB-DC-044F-W
X. ±0.50	X. ±2°	APPROVED	HE. LONG. FEI 2021.4.8	SHEET: 1/1 REV.: A1
X.X ±0.30	X.X ±1°			DRAWING NO
X.XX ±0.20	X.XX			
X.XXX ±0.10	X.XXX			


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

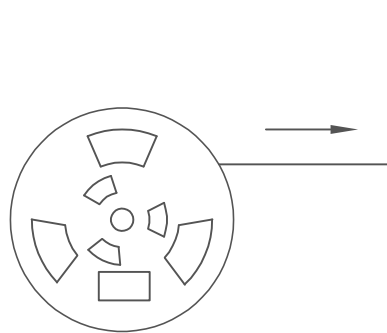

载带

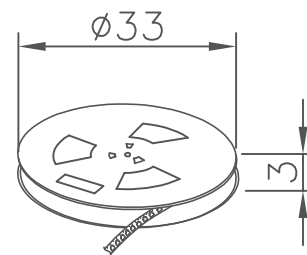

载带(400pcs/盘)

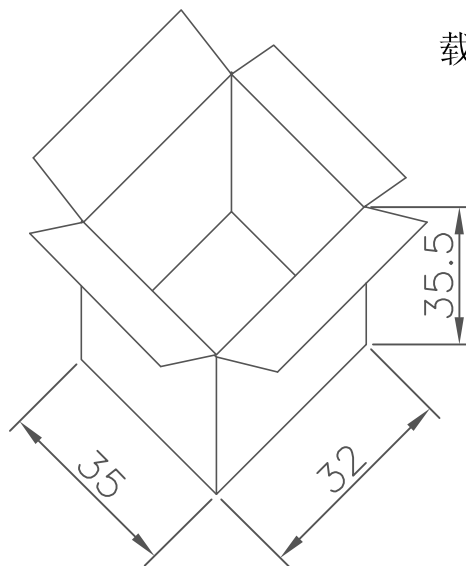

纸箱 (4000pcs)

单位: cm

UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:		DESIGN:	GAO. PENG 2018.11.15
DIM	TOL	DIM	TOL	CHECK:	
X.	±0.50	X.	±2°		
X.X	±0.30	X.X	±1°		
X.XX	±0.20	X.XX	—		
X.XXX	±0.10	X.XXX	—	APPROVED	HE. LONG. FEI 2018.11.15
 3RD ANGLE PROJECTION				UNIT: mm	
				PART NAME: Φ5.5xΦ2.5卧式 H=7.20 DC POWER JACK-包装图	
				PART NO. XB-DC-044-F-W	
				SHEET: 1/1 REV.: A1	
				DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE