
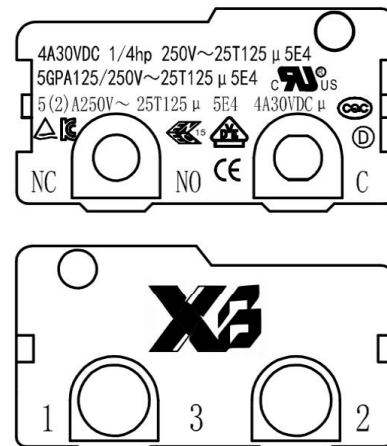


1. Specifications 技术特性表

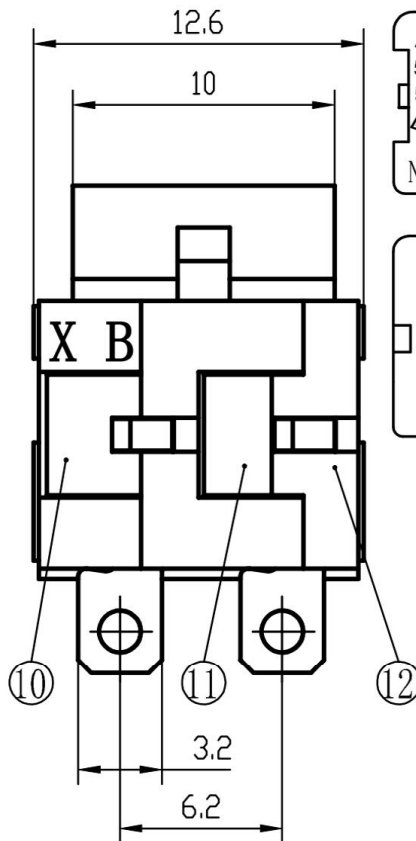

RATINGS 额定值	4A30VDC 1/4hp 250V~25T125 μ 5E4 5GPA125/250V~25T125 μ 5E4
TEMPERATURE 温度等级	5(2)A250V~25T125 μ
ELECTRONICAL LIFE 电气寿命	5E4 4A30VDC μ
INSULATION STRENGTH 绝缘电阻	100M Ω MIN(500VDC)
TEST VOLTAGE 耐电压	AC1000V/1500V
CONTACT RESISTANCE 接触电阻	50m Ω MAX
OPERATING FORCE 动作力	1.2N MAX
OP 动作位置	8.9 $\pm$ 1 mm


2. Parts List 零件材质表

No.	Name 名称	Material 材料
1	NC terminal 常闭端子	Brass alloy H65, Silver plated 黄铜, 镀银
2	NO terminal 常开端子	Brass alloy H65, Silver plated 黄铜, 镀银
3	TERMINAL 支架	Brass alloy H65, Silver plated 黄铜, 镀银
4	Plunger 开关子	Plastic PPS 工程塑料
5	Pull spring 拉簧	SUS304H 不锈钢丝
6	Moving arm 动臂	Stainless steel SUS304 不锈钢
7	Moving piece 可动片	Tin-brass QSn6.5-0.1 锡青铜
8	Contact 电触点	AgNi10 银-镍
9	Contact 电触点	AgNi10 银-镍
10	CASE 基座	Plastic PBT(黑色) 工程塑料
11	CASE 基座	Plastic PBT(黑色) 工程塑料
12	COVER 盖	Plastic PBT(黑色) 工程塑料

General Tolerance Dimemmsion 未注公差

≤ 3	± 0.1
$> 3 - 10$	± 0.2
$> 10 - 30$	± 0.3

SCHEMATIC DIAGRAM



8					TOLERANCE							
7					UNLESS SPECIFIED							
6					WITHIN 1.5mm : ± 0.1 mm		A	2012-9-25	初 版			ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm		ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch				UNIT : mm	DRWG NO.: XB-WD2-0-23T		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-WD2-0-23T				SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					CHK'D	DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK						APPD.	ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH								