

A

B

C

D

E




A

B

C

D


E

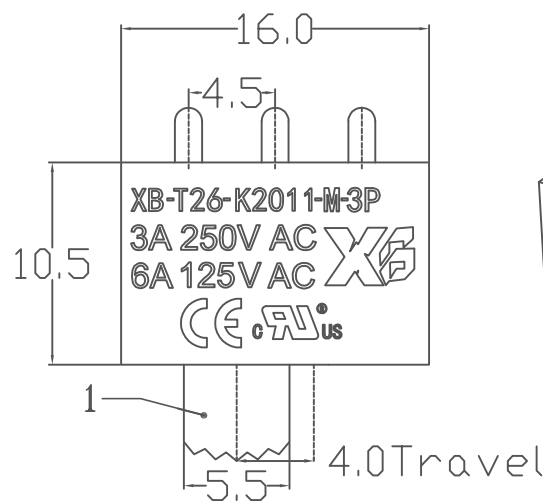

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	1P-2T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

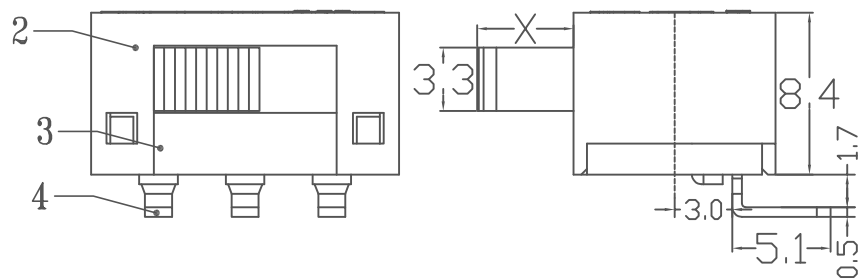

Model No	X(mm)
XB-T26-K2011-M-3P-G2	2mm
XB-T26-K2011-M-3P-G3	3mm
XB-T26-K2011-M-3P-G4	4mm
XB-T26-K2011-M-3P-G5	5mm
XB-T26-K2011-M-3P-G6	6mm
XB-T26-K2011-M-3P-G7	7mm
XB-T26-K2011-M-3P-G8	8mm
XB-T26-K2011-M-3P-G9	9mm
XB-T26-K2011-M-3P-G10	10mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新图面		
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 ±0.2 Above 5 - 15 ±0.3 Above 15 - 30 ±0.4 Above 30 - 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
------------------------------------	--	--------------	-------	----

DRAWN BY: PENG GAO	DATE 01/29/24	MAT'L	TI'TLE
CHECKED BY: ZENG CHEN	DATE 01/29/24	FINISH	MODLE
APPROVED BY: ZENG CHEN	DATE 01/29/24	SCALE 1:1	DWG NO. XB-T26-K2011-M-3P
		SHEET NO. 1 of 1	PART NO. XB-T26-K2011-M-3P
			SIZE A4 VER