


ROHS

产品尺寸图




电路图

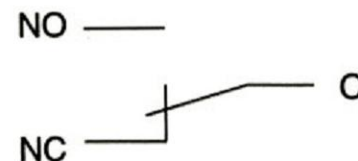

Rating: 1A 36VDC
 1A 125VAC / 0.5A 250VDC
 Contact Resistance: 50mΩ Max.
 Insulation Resistance: DC 500V 100MΩ Min.
 Dielectric Strength: AC 1000V 1 minute
 Total travel: 2.0±0.5mm
 Operating Force: 400±100gf
 Electrical Life: 10,000 cycles
 Mechanical Life: 5,000 cycles
 Operating Temperature: -20° C ~ 70° C
 Function: OFF - ON

电器原理图



MATERIAL:

Actuator: SUS ;
 Top Base: SUS;
 Bottom Base: PA66+GF ;
 Terminal: Brass, Silver plated ;
 Nut: Brass, Ni plated .


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : METAL PUHS BUTTON SWITCH

MODEL : XB-PBM10-13Z-H-NNN-SO



TOLERANCE
 ≤1.5mm±0.1
 > 1.5mm±0.2
 >10mm±0.3

ANGLE
 ±2°

UNIT	MM	DWN.	ZENQ. CHEN	DATE					
SCALE	3 : 1	CHK'D	PENG. GAO	DATE					
VBRSION	01	APPD.	FEI. LONG. HE	DATE					
NO.	PART NAME	MATERIAL	QTY.	FINISHING					

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK